923 Bulkhead connector

8-pin
Earth-to-Housing Connection according to VDE 0627
flange mount /Flange 25x25

Technical Data

number of pins	8
power	4 (3+PE)
signal	4
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data	**power**	**signal**
rated current	max. 30 A*	max. 7 A*
rated voltage	630V (AC/DC)	250 V (AC/DC)
rated insulation voltage (L-L)	6000 V	2500 V
mating cycles	500	

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PA 6.6 mod., UL 94/V0
seals	FKM

Contacts (not part of product contents)

Tools (not part of product contents)

B DF A 108 NN 00 00 0150 000
B D A 108 N 00 00 0150 000



Contact Arrangement
mating view




© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Deutschland
Tel.: +49 9962 2002-0
Fax: +49 9962 2002-70
E-Mail: intercontec@te.com
Web: www.intercontec.biz

issue: 31.08.2018

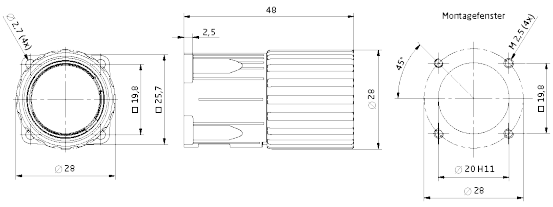

Main Dimensions
Bulkhead connector

*for max. wire cross-section
pay attention to the
cross-section of used contacts

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-917659-5 2132781-3 7-2178711-4 ROX9J100R 1801174-1 967116-2 ROX9J120R 5174225-5 539635-1 ROX9J820R T4112401051-000 1622820-6 320552 ROX9J4K3 SMA-A0102FTDL10K 2008571-3 363549-000 ROX9J2K4 SC30R33KT 641763-1 828801-6 MPT100C8K2F 1-316080-2 1-350945-0 322335 ROX9J160R 173796-E 2149966-1 336330-1 SMF3100KJT