


RIGHT ANGLE JACK RECEPTACLE FOR PCB SOLDER LEGS

R141.665.000


Series : **BNC**

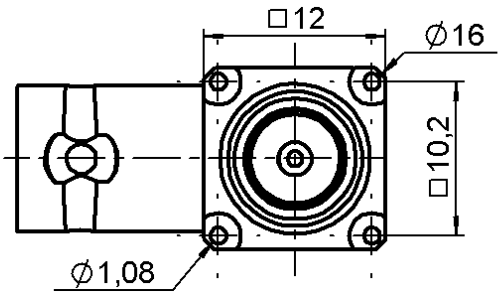

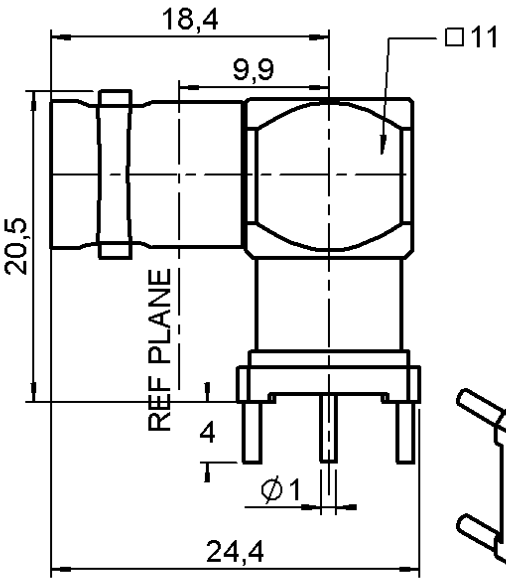


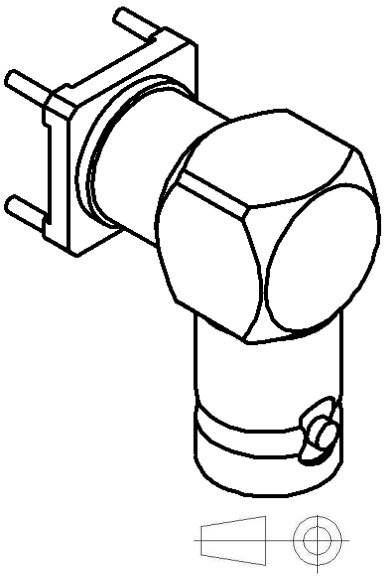

PANEL CUT OUT



	mm	
	Maxi	mini
A	5.13	5.03
B	1.3	1.2
C	10.21	10.11



All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 0.5 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0525 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Arrow.com.

RIGHT ANGLE JACK RECEPTACLE FOR PCB

SOLDER LEGS

R141.665.000

Series : **BNC**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.06** +	**0.035**	x F(GHz) Maxi
Insertion loss		**.025***	√F(GHz) dB Maxi
RF leakage	- (	**57**	- F(GHz)) dB Maxi
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1500**	Veff mini
Insulation resistance		**5000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHER CHARACTERISTICS

Assembly instruction **NA**

Others :
* Coaxial Transmission Line Only

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**18**	N mini
Axial force – Opposite end	**18**	N mini
Torque	**2.8**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**17.000**	g

Issue : 0525 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Arrow.com.