

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| REV. | ECN NO. | LOCATION | DESCRIPTION | DATE | DESIGN |
| A0 | N/A | | INITIAL RELEASE | / | / |
| A1 | N/A | | 图面升级整理图面 | 2025.2.11 | 阿树 |

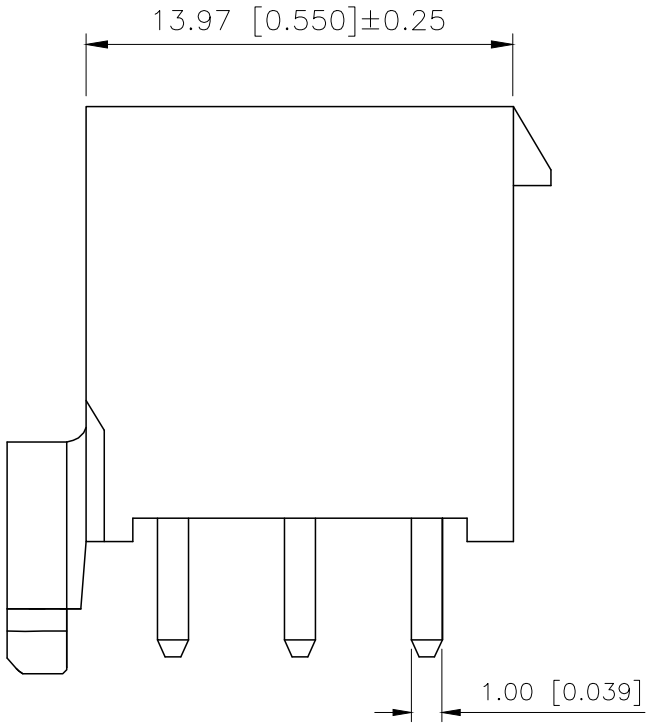

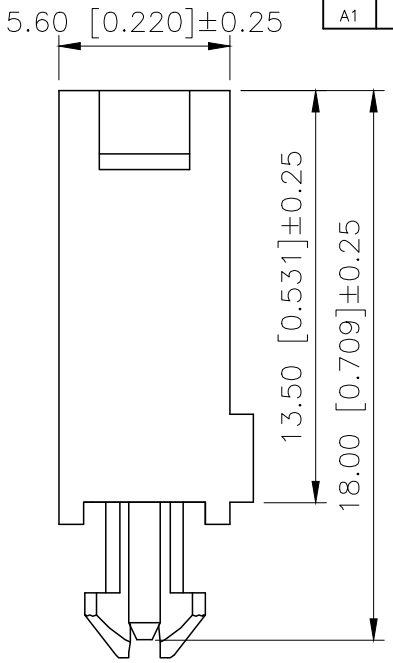



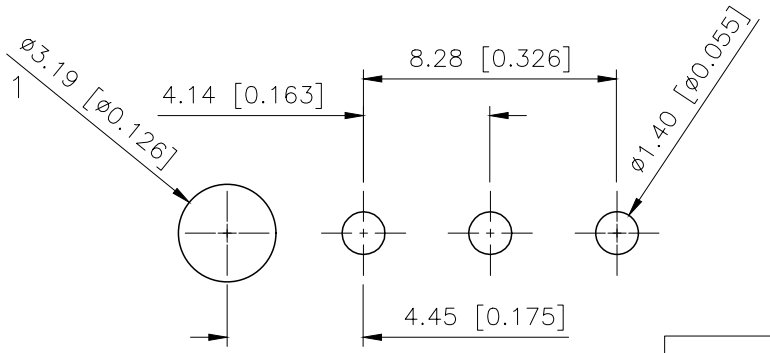

Specifications:
规格：
Voltage rating:600V AC/DC
额定电压：600V AC/DC
Current rating:7A AC/DC
额定电流：7A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压：1500V AC/分钟
Temperature range:−40℃−+125℃
温度范围：−40℃−+125℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ min
Contact resistance:20mΩ max
接触电阻：20mΩ max

PART NO.:

X4140 W V−03 S−N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

①Series No
②Category:W−Wafer
③Welding Board Angle:V−Stright 180°
④Row No.Pin No:03 PIN
⑤Special No:S−No Positioning
⑥Material:N0−PA66 94V−0
⑦Plating:SN−Tin Plated

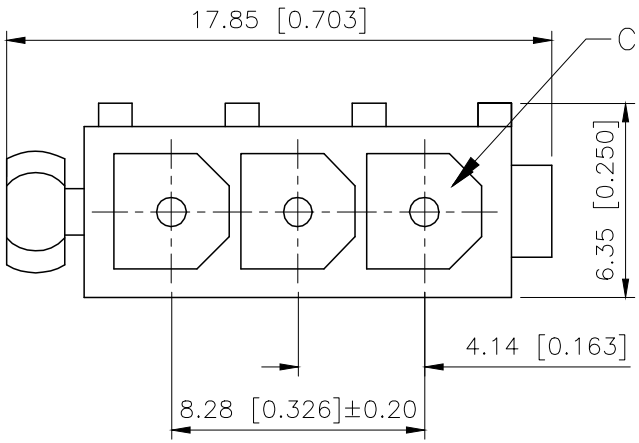


P.C.B LAYOUT :TOP VIEW

| X4140WV−03S−N0SN | PA66 | Brass | X4140HM |
|---|---|---|---|
| PART NO | Material | Material(Pin) | Suitable XKB Housing |

| AuGLAR | ±5° |
|---|---|
| X. | ±0.40 |
| X.x | ±0.30 |
| X.xx | ±0.20 |
| X.xxx | ±0.15 |
| UNSPECIFIED TOLERAuCES | |

XKB Connection 星标

| | | | |
|---|---|---|---|
| DESIGN | 阿树 | VIEW: | MODEL TYPE: 4.14mm Crimp Style Connector |
| CHECKED | | UNIT: mm/in | PART NO.: X4140WV−03S−N0SN |
| APPROVED | | SIZE: A4 | DWG NO.: |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| SCALE | PAGE | REVISION |
|---|---|---|
| N/A | 1/1 | A1 |