



RoHS

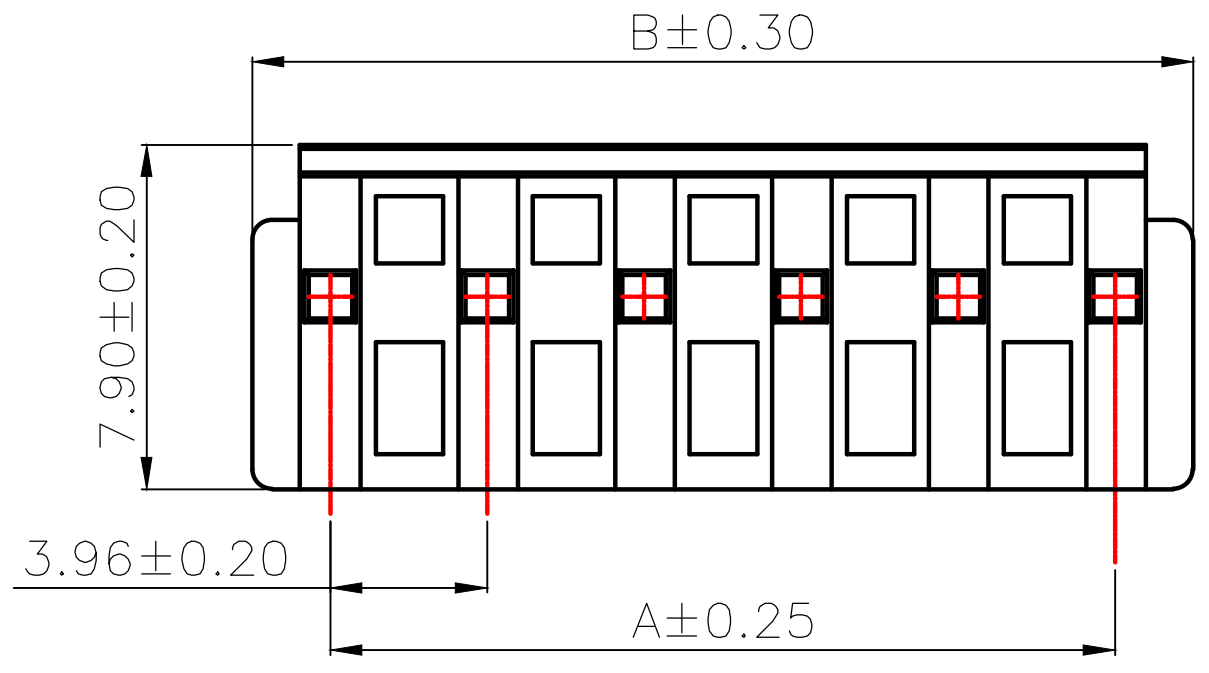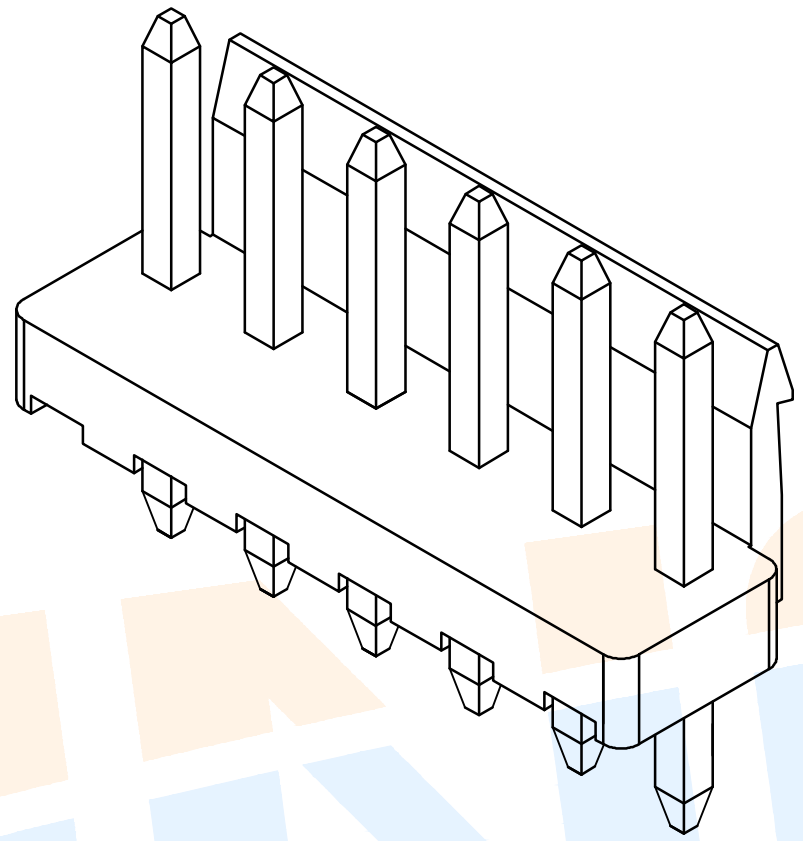


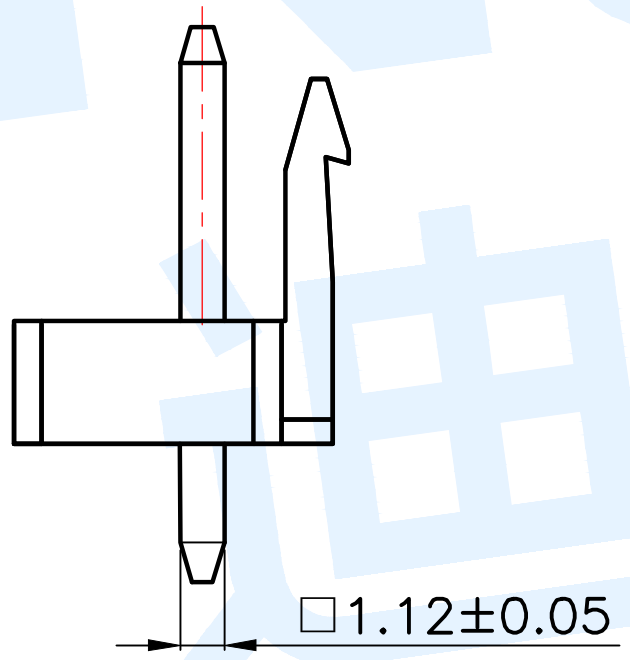


| Model No. | Pin | A | B |
|---|---|---|---|
| WAFER−VH3.96−2PZZ−W | 2 | 3.96 | 7.92 |
| WAFER−VH3.96−3PZZ−W | 3 | 7.92 | 11.88 |
| WAFER−VH3.96−4PZZ−W | 4 | 11.88 | 15.84 |
| WAFER−VH3.96−5PZZ−W | 5 | 15.84 | 19.80 |
| WAFER−VH3.96−6PZZ−W | 6 | 19.80 | 23.76 |
| WAFER−VH3.96−7PZZ−W | 7 | 23.76 | 27.72 |
| WAFER−VH3.96−8PZZ−W | 8 | 27.72 | 31.68 |
| WAFER−VH3.96−9PZZ−W | 9 | 31.68 | 35.64 |
| WAFER−VH3.96−10PZZ−W | 10 | 35.64 | 39.60 |
| WAFER−VH3.96−11PZZ−W | 11 | 39.60 | 43.56 |
| WAFER−VH3.96−12PZZ−W | 12 | 43.56 | 47.52 |
| WAFER−VH3.96−13PZZ−W | 13 | 47.52 | 51.48 |
| WAFER−VH3.96−14PZZ−W | 14 | 51.48 | 55.44 |

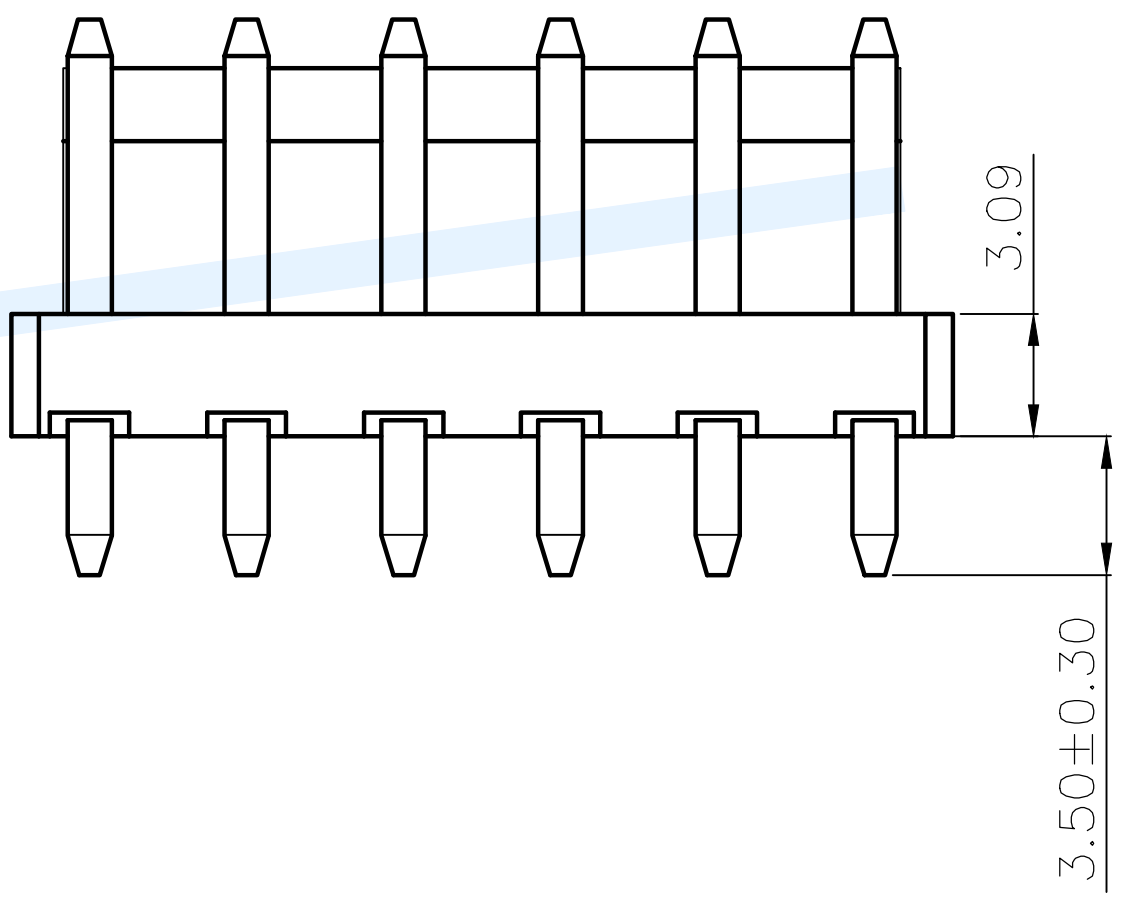


适用线路板(PCB LAYOUT)

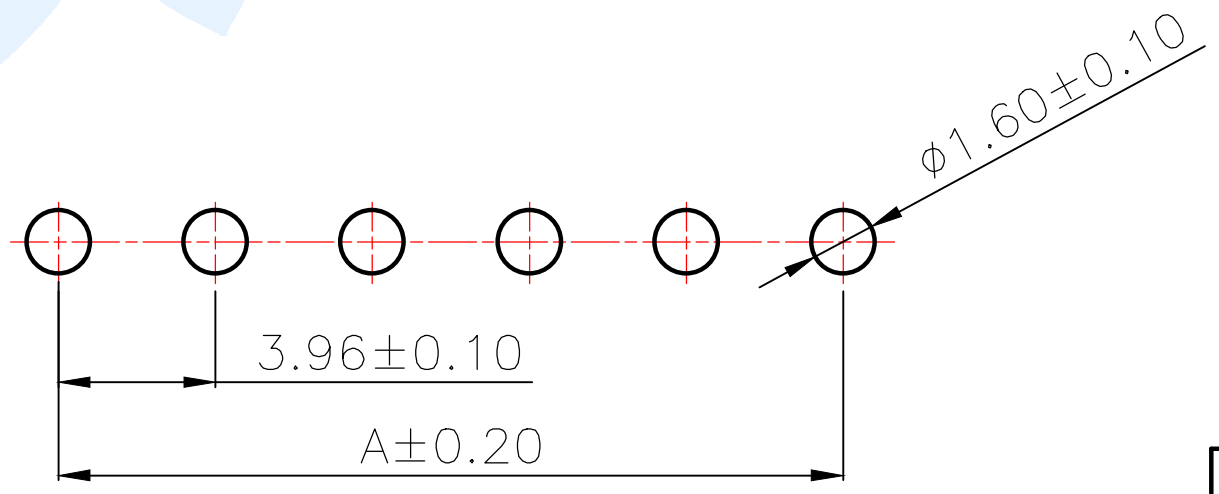Specifications/技术规格:

1.Poles/线数：2～14P
2.Wire range/适用线规：AGW 22#～18#
3.Applicable PC board thickness/适用PC板厚度：1.6mm
4.Current rating/额定电流：7.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

| NO. | Name | Number | Qty | Materil | Remarks |
|---|---|---|---|---|---|
| Ⓑ | Terminal | | | Brass | Plating Sn |
| Ⓐ | Housing | | 1 | PA66 | White |

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

| Tolerance not specified | |
|---|---|
| angle | ±2° |
| 10~30 | ±0.30 |
| 5~10 | ±0.20 |
| ~ 5 | ±0.10 |

modify | Review | Approved

design | date
Review | date
Approved | date

Drawing number:

Proportion 1:1 | unit mm | gape number | A4

name: WAFER CONNECTOR

model: WAFER−VH3.96−□□PZZ−W

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## ZHONGDI:

WAFER-MX1.25-5PZZ-C22-9T WAFER-VH3.96-5PWT-W1-P WAFER-ZH1.5-4PLT-W1-P
WAFER-ZH1.5-2PLT-W1-P WAFER-MX1.25-2PWZ-C22-9T WAFER-MX1.25-5PLT-W1-P
WAFER-SH1.0-6PWT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-XHB2.54-7PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-SH1.0-8PWT-W1-P WAFER-ZH1.5-12PWT-W1-P WAFER-GH1.25-12PLT-W1-P
WAFER-HY2.0-6PWT-W1-P WAFER-HY2.0-7PWT-W1-P WAFER-SH1.0-11PLT-W1-P
WAFER-SHB1.0-13PLT-W1-P WAFER-TJC8-2.54-2PWZ WAFER-ZH1.5-2PWT-W1-P
WAFER-HY2.0-6PLT-W1-P WAFER-SUR0.8-14PWT-W1-P WAFER-TJC8-2.54-12PZZ
WAFER-VH3.96-3PWT-W1-P WAFER-HY2.0-10PWT-W1-P WAFER-SUR0.8-12PWT-W1-P
WAFER-XH2.54-12PWT-W1-P WAFER-GH1.25-14PWT-W1-P WAFER-MX1.25-4PWZ-C22-9T