


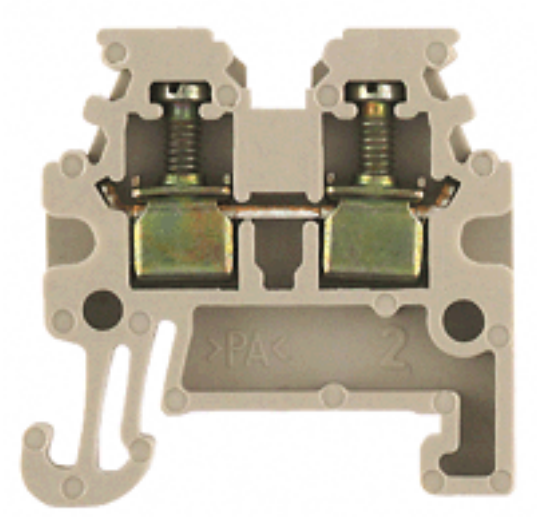

General ordering data	
Order No.	1753280000
Part designation	WDU 1.5/R3.5
Version	Feed-through terminal, 1.5 mm², Screw connection, Wemid, dark beige, TS 15
EAN	4032248020737
Qty.	100 pc(s).

Product notes	
Note, technical data	PZ 6/5 recommended as crimping tool for 1.5 mm² with wire-end ferrule

PT OKIECEx/ATEX rating data	
EU-type examination certificate	KEMA99ATEX6545U
Download, German	KEMA99ATEX6545U_d.pdf
Download English	KEMA99ATEX6545U_e.pdf
ATEX voltage	275 V
ATEX current	14 A
ATEX conductor cross-section	1.5 mm²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)	
Solid, min.	0.5 mm²
Solid, max.	0.75 mm²
Flexible, min.	0.5 mm²
Flexible, max.	0.75 mm²
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm²
Flexible with ferrule, max. (DIN 46228 pt 1)	0.5 mm²

Additional technical data	
Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 15
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal

CSA rating data	
Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 16

Conductors for clamping (additional connection)	
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm²

Conductors for clamping (rated connection)	
Clamping range, min.	0.13 mm²
Clamping range, max.	1.5 mm²
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	7 mm
Clamping screw	M 2
Blade size	0.4 x 2.5 mm
Tightening torque range	0.3 Nm
Gauge to IEC 60947-1	A1
Solid, min.	0.5 mm²
Solid, max.	1.5 mm²
Stranded, min.	1.5 mm²
Stranded, max.	1.5 mm²
Flexible, min.	0.5 mm²
Flexible, max.	1.5 mm²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm²
Flexible with ferrule, max. (DIN 46228/1)	1.5 mm²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm²

Conductors for clamping (rated connection)	
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm²
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 14
AWG conductor size, min.	0.13 mm²
AWG conductor size, max.	2.08 mm²

Dimensions	
Width	3.5 mm²
Height of lowest version	25 mm
Length	24.5 mm
Weight	2.39 g
TS 15 offset	13.5 mm
TS 35 offset	24.5 mm

Rating data	
Rated cross-section	1.5 mm²
Rated voltage	400 V
Rated impulse voltage	4 kV
Rated current	17.5 A
Standards	IEC 60947-7-1
Current with max. conductor	17.5 A
Pollution severity	3

UL rating data	
Voltage (UL)	300 V
Current (UL)	10 A
Min. cross-section (UL)	AWG 26
Max. cross-section (UL)	AWG 14

Approvals

Approvals institutes

Classifications

ETIM 2.0	EC000897
ETIM 3.0	EC000897
eClass 4.1	27-14-11-23
eClass 5.0	27-14-11-20
eClass 5.1	27-14-11-20

Similar products

Order No.	Part designation	Version
1753290000	WDK 1.5/R3.5	Feed-through terminal, 1.5 mm², Screw connection, Wemid, dark beige, TS 15

1754180000	WDK 1.5/R3.5 BL	Feed-through terminal, 1.5 mm², Screw connection, Wemid, blue, TS 15
1754170000	WDU 1.5/R3.5 BL	Feed-through terminal, 1.5 mm², Screw connection, Wemid, blue, TS 15
1798460000	WPE 1.5/R3.5	Feed-through terminal, 1.5 mm², Screw connection, Wemid, green/yellow, TS 15

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WeidmÃ¼ller:

1221360000 1760040000 9456650000 1608830000 1786450000 1906650000 8690200000 024892 SAKS3
1607520000 1784180000 1818090500 8951460000 9037380000 1013450000 1031470000 1121990000
1289470000 1608570000 0303620000 1127570000 2642470000 1622940000 1890260000 1950200000
2535780000 1649300000 1779950000 1804580000 1124150000 1609820000