
Current Transducer LT 2005-S

I_{PN} = 2000 A

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

0634



Electrical data

I_{PN}	Primary nominal current rms		2000		A
I_{PM}	Primary current, measuring range @ ± 24 V		0 .. ± 3000		A
R_M	Measuring resistance		$R_{M\,mini}$	$R_{M\,maxi}$	
	with ± 15 V	@ ± 2000 A_{maxi}	0	8	Ω
		@ ± 2200 A_{maxi}	0	5	Ω
	with ± 24 V	@ ± 2000 A_{maxi}	5	29	Ω
		@ ± 3000 A_{maxi}	5	11	Ω
I_{SN}	Secondary nominal current rms		400		mA
K_N	Conversion ratio		1 : 5000		
V_C	Supply voltage (± 5 %)		± 15 .. 24		V
I_C	Current consumption (± 1)		28 (@ ± 24V) + I_S		mA

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , T_A = 25°C		± 0.3		%
ε_L	Linearity error		< 0.1		%
			Typ	Maxi	
I_O	Offset current @ I_P = 0, T_A = 25°C			± 0.8	mA
I_{OM}	Magnetic offset current @ I_P = 0 and specified R_M, after an overload of 3 x I_{PN}			± 0.4	mA
I_{OT}	Temperature variation of I_O	0°C .. + 70°C	± 0.2	± 0.3	mA
t_r	Response time [1] to 90 % of I_{PN} step		< 1		µs
di/dt	di/dt accurately followed		> 50		A/µs
BW	Frequency bandwidth (- 1 dB)		DC .. 100		kHz

General data

T_A	Ambient operating temperature		0 .. + 70	°C
T_S	Ambient storage temperature		- 25 .. + 85	°C
R_S	Secondary coil resistance @ T_A = 70°C		25	Ω
m	Mass		1.7	kg
	Standards		EN 50178: 1997	

Note: [1] With a di/dt of 100 A/µs.

Features

- Closed loop (compensated) current transducer using the Hall effect
- Isolated plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice.

Current Transducer LT 2005-S

Isolation characteristics

V_d	Rms voltage for AC isolation test, 50 Hz, 1 min	6	kV
$\hat{V}_w$	Impulse withstand voltage 1.2/50 µs	44	kV
		Mini	
dCp	Creepage distance	76	mm
dCl	Clearance distance	63.5	mm
CTI	Comparative Tracking Index (Group IIIa)	225	

Application examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCl, $\hat{V}_w$	Rated isolation voltage	Nominal voltage
Single isolation	6300 V	6300 V
Reinforced isolation	3200 V	3200 V

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock


When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).
Ignoring this warning can lead to injury and/or cause serious damage.
This transducer is a built-in device, whose conducting parts must be inaccessible after installation.
A protective housing or additional shield could be used.
Main supply must be able to be disconnected.


Dimensions LT 2005-S (in mm. 1 mm = 0.0394 inch)

Front view

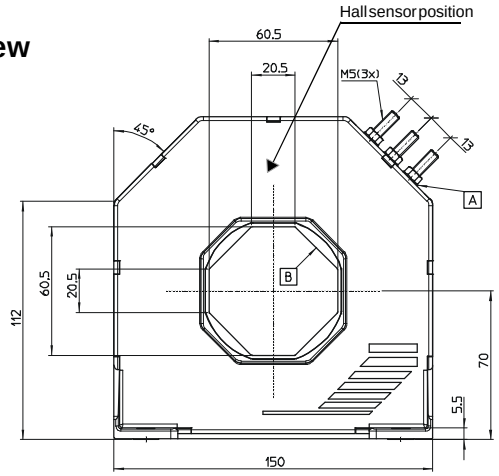


Left view

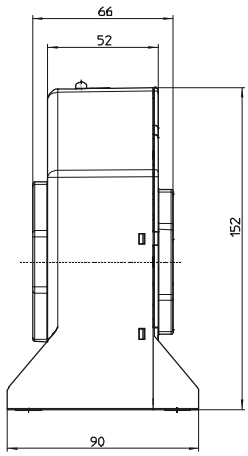

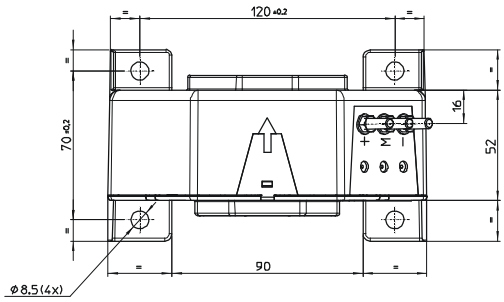

Top view

Connection

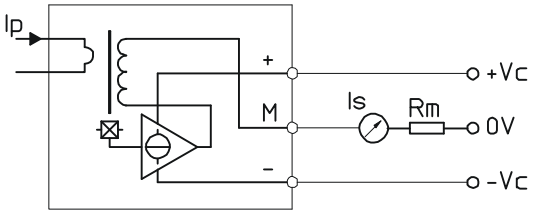

Mechanical characteristics

• General tolerance	± 0.5 mm
• Transducer fastening	4 holes ∅ 8.5 mm
	4 M8 steel screws
Recommended fastening torque	10 Nm or 7.38 Lb - Ft
• Octagonal primary through-hole	
for bar	60.5 x 20.5 mm
or	∅ maxi 56 mm
• Connection of secondary	M5 threaded studs
Recommended fastening torque	2.2 Nm or 1.62 Lb - Ft

Remarks

- I_S is positive when I_P flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

LEM:

DHR 100 C420 DHR 100 C5 HLSR 10-P HX 10-NP 90.M4.99.003.0 DHR 200 C10 HX 10-P/SP2 LA 25-NP 30027567 DK 300 B10 HOB 130-P HOB 75-P/SP33 HO 180-P-0100 HO 50-/SP30 HOB 50-P HOYL 800-S/SP33-1106 HXS 10-NP/SP3 LESR 15-NP LXS 25-NPS 90.N8.19.000.0 LA 100P/SP13 LA200-P LAH 25-NP DVL 150 HO 250-S/SP30-0100 HX 05-NP AHR 500 B10 CKSR 15-NP HO 10-P/SP33 LAH 50-P