



THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.


ACTUAL SIZE



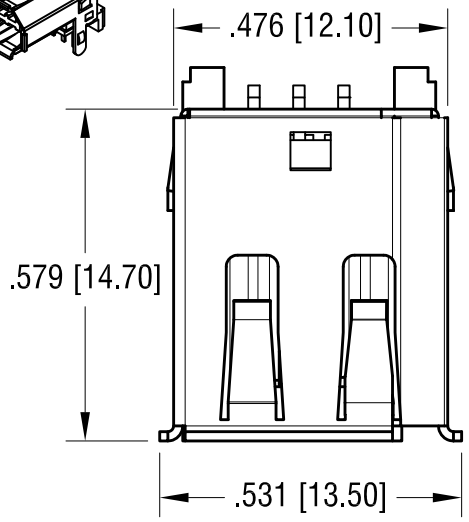

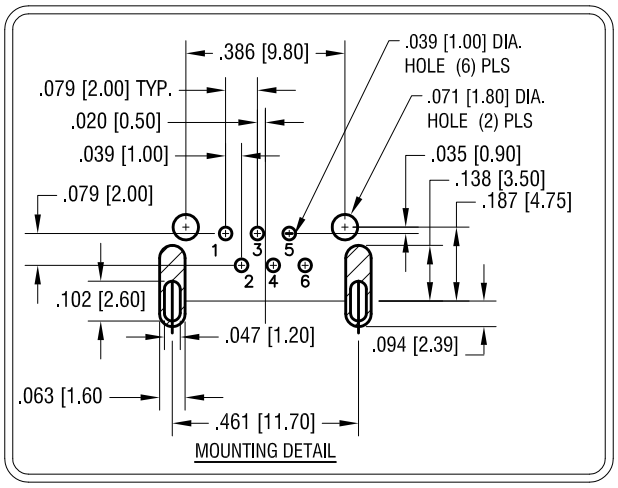

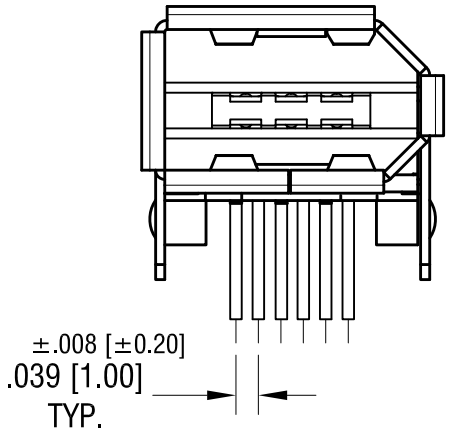

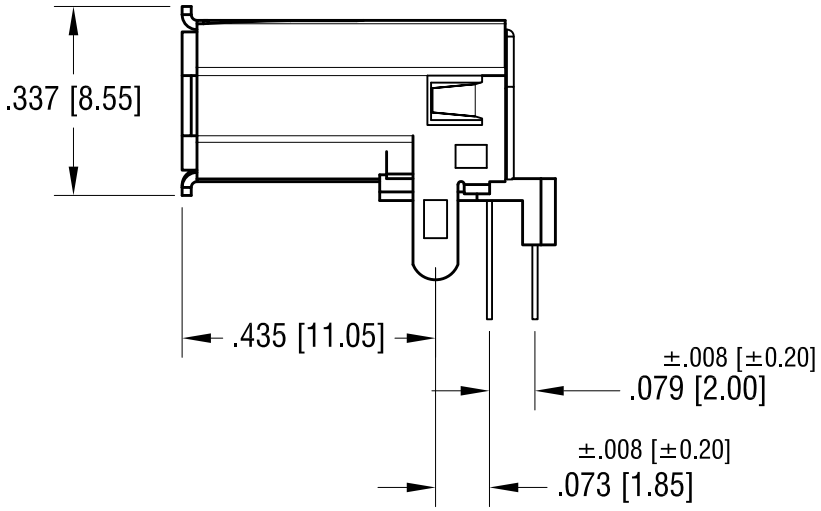

NOTE:

1. SHELL: MAT'L- PHOSPHOR BRONZE
   FINISH- TIN PLATE, OVER NICKEL PLATE
2. INSULATOR: MAT'L- LCP, UL94V-0
3. CONTACT: MAT'L- PHOSPHOR BRONZE
   FINISH ON CONTACT AREAS-
   GOLD PLATE, OVER NICKEL PLATE
   FINISH ON SOLDER TAIL-
   TIN PLATE, OVER NICKEL PLATE
4. ELECTRICAL SPECIFICATIONS:
   RATED VOLTAGE- 30V AC (rms)
   CONTACT CURRENT RATING: 1A MAX.
   CONTACT CURRENT RESISTANCE: 30 millioms MAX,
   INSULATION RESISTANCE: 1000 Megohms Min.
   DIELECTRIC WITHSTANDING: .500V AC
   OPERATING TEMPERATURE: 32° [0°C] TO 104° [40°C]

DATE	DESCRIPTION	REV.
4.19.24	CHANGE AS PER PCN 24–026	C
5.19.16	CHANGE AS PER ECN 16–059	B
6.7.05	CHANGE AS PER ECN 05–031	A

KEYSTONE ELECTRONICS CORP.

www.keyelco.com ● ASTORIA, N.Y. 11105-2017 ● Tel (718) 956-8900

PART NAME: IEEE 1394 'FIREWIRE' HORIZONTAL SOCKET

MATERIAL: AS NOTED

FINISH: AS NOTED

DRN BY: BOONE | DATE: 7.1.99

APP'D: RH | SCALE: 3X

TOLERANCES INCH [MM]
DECIMAL ± .010 [± 0.25]
ANGULAR ± 1°
UNLESS OTHERWISE SPECIFIED

CODE: C

DWG NO.: 929

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Keystone Electronics:

8406 892 4628 603-8 81-8 1028C 1837 3567 7233 7311 3001 4816 4871 2462 4934 7623 9900 1220 1833 1798C 2501 3059 3065 4876 NC16354SZ 1595-2 1803 2220 4673 5266