
CDS Photoconductive Photocells

PDV-P8107

WWW.LUNAINC.COM

Precision – Control – Results



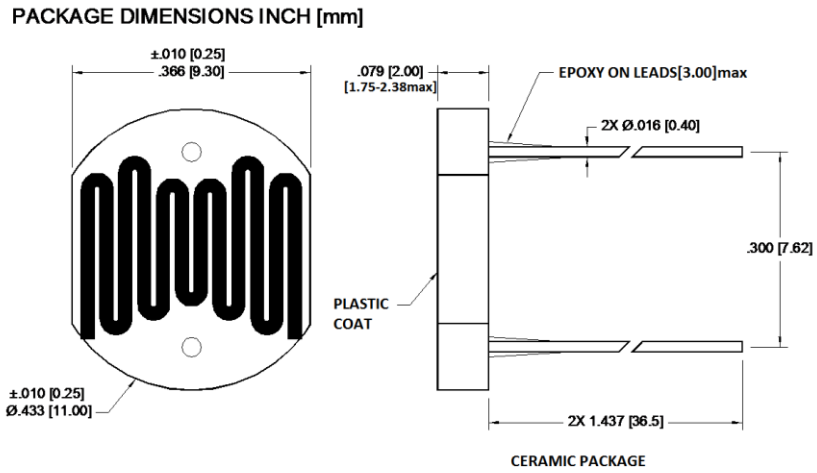

DESCRIPTION

The **PDV-P8107** are (CdS), Photoconductive photocells designed to sense light from 400 to 700 nm. These light dependent resistors are available in a wide range of resistance values. They're packaged in a two leaded plastic-coated ceramic header.

FEATURES

- Visible light response
- Sintered construction
- Low cost

RELIABILITY

Contact Luna for recommendations on specific test conditions and procedures.

APPLICATIONS

- Camera exposure
- Shutter controls
- Night light controls

ABSOLUTE MAXIMUM RATINGS

SYMBOL	MIN		MAX	UNITS	(TA)= 23°C UNLESS OTHERWISE NOTED
Applied Voltage	-	-	150	V	-
Continuous Power Dissipation	-	-	100	mW/°C	-
Operation and Storage Temperature	-30	to	+75	V	-
Soldering Temperature*	-	-	+260	°C	-

* 0.200 inch from base for 3 seconds with heat sink.

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

REV 10-24-16

© 2016 Luna Optoelectronics. All rights reserved.

Luna Optoelectronics, 1240 Avenida Acaso, Camarillo CA 93012 • Phone (805) 987-0146 • Fax (805) 484-9935

OPTO-ELECTRICAL PARAMETERS


T_a = 23°C UNLESS NOTED OTHERWISE

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Dark Resistance	After 10 sec. @10 Lux @ 2856°K	20	-	-	MΩ
Illuminated Resistance	10 Lux @ 2856°K	80	-	240	KΩ
Sensitivity	$\frac{\mathrm{Log(R100)} - \mathrm{Log(R10)}\ **}{\mathrm{Log(E100)} - \mathrm{Log(E10)}\ ***}$	-	0.9	-	Ω/Lux
Spectral Application Range	Flooded	400	-	700	nm
Spectral Application Range	Flooded	-	520	-	nm
Rise Time	10 Lux @ 2856 °K	-	60	-	ms
Fall Time	After 10 Lux @ 2856 °K	-	25	-	ms

**R100, R10: cell resistances at 100 Lux and 10 Lux at 2856 °K respectively.
***E100, E10: luminances at 100 Lux and 10 Lux 2856 °K respectively.

TYPICAL PERFORMANCE

CELL RESISTANCE vs. ILLUMINANCE

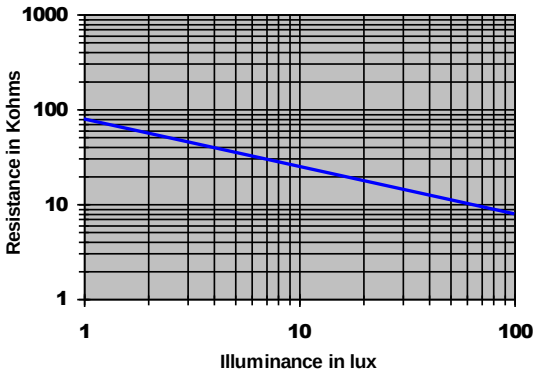

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

© 2016 Luna Optoelectronics. All rights reserved.

Luna Optoelectronics, 1240 Avenida Acaso, Camarillo CA 93012 • Phone (805) 987-0146 • Fax (805) 484-9935

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Advanced Photonix:

0090-3111-185 PDB-C154SM PDB-C613-2 PDV-P9002 019-141-411-G 076-14-21-011 118-23-21-021 PDV-P5002 PDV-P9200 0050-3111-111 NSL-32SR3 NSL-5540 NSL-5910 100-12-22-021 100-41-21-231 NSL-19M51 PDB-V615-2 PDV-P8006 NSL-5150 SD019-141-411-G NORPS-12 PDV-P9004 PDV-P9203 019-111-411 APX-SC0010 NSL-32SR2 NSL-4960 PDV-P8101 PDV-P9008 SD200-12-22-041