www.lemo.com

PCS.01.250.DLLE24

SUMMARY



Image is for illustrative purpose only

Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

Request a quote

Catalog

Series	01
Termination type	Female solder
IP rating	50
Cable Ø	0.00 - 0.00 mm
Status	active
Alternative part	
Matching parts	FFS.01.250.DLAE24

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PCS*: Free receptacle with cable crimping
Keying	Circular (can rotate)
Housing Material	Brass (gold plated) shell, collet nut, brass latch sleeve and mid pieces
Variant	
Weight	1.26 g

Performance

Configuration	01.250 : 1 Coax (50 Ohm)
Insulator	
Rated Current	

Others


Endurance (Shell): 1000 mating cycles

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

IP Rating: 50

DRAWINGS

Draws

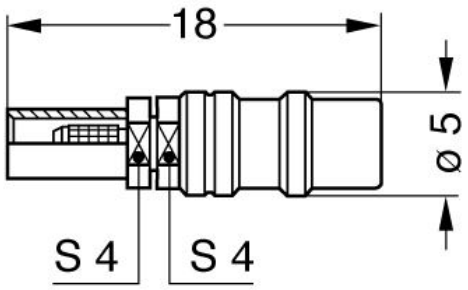



Dimensions

	A	L	S1	S2
mm.	5	18	4	4
in.	0,20	0,71	0,16	0,16

RECOMMENDED BY LEMO

Tools

None

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.