Amphenol SineSystems

miniBOSS™
Signal Distribution System

CONFIGURATION	PART NUMBER	LENGTH
MINI, 5 PIN, 16AWG FEMALE PLUG STRAIGHT	MN54AC01Mxxx	AS REQUESTED

DIMENSIONS

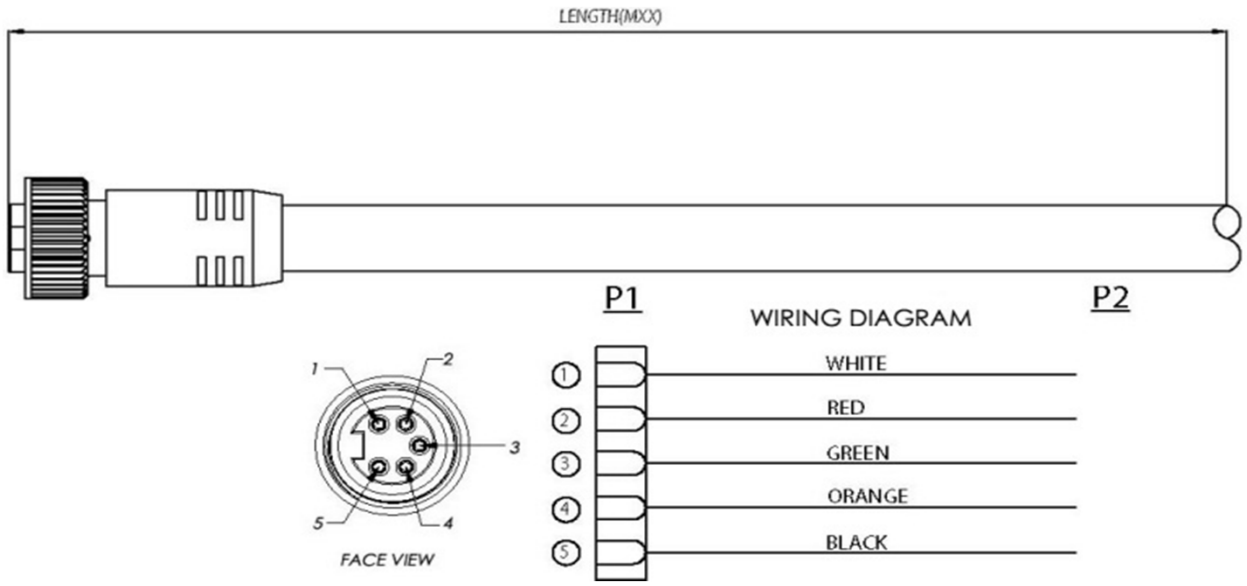

TECHNICAL DATA

APPROVALS:	UL, c(UL)
TEMPERATURE RANGE:	-20C to +105C
PROTECTION:	IP 67, NEMA 6P
VOLTAGE RATING:	600VAC
AMPERAGE:	8A
HOUSING:	OIL RESISTANT PVC
CONTACTS:	COPPER ALLOY
CONTACT PLATING:	GOLD OVER NICKEL PLATING
CONNECTOR FACE:	PVC
COUPLING:	MACHINED ALUMINUM, ANODIZED
CABLE CHARACTERISTICS:	STOOW 600V 105°C CSA ST FT2-ROHS PVC INSULATED 16AWG STRANDED COPPER (65x #34)

© 2011 Amphenol Sine Systems Corporation. Every effort has been made to ensure that the information contained in this document is accurate at the time of publication. Specifications or information stated in this publication are subject to change without notice.