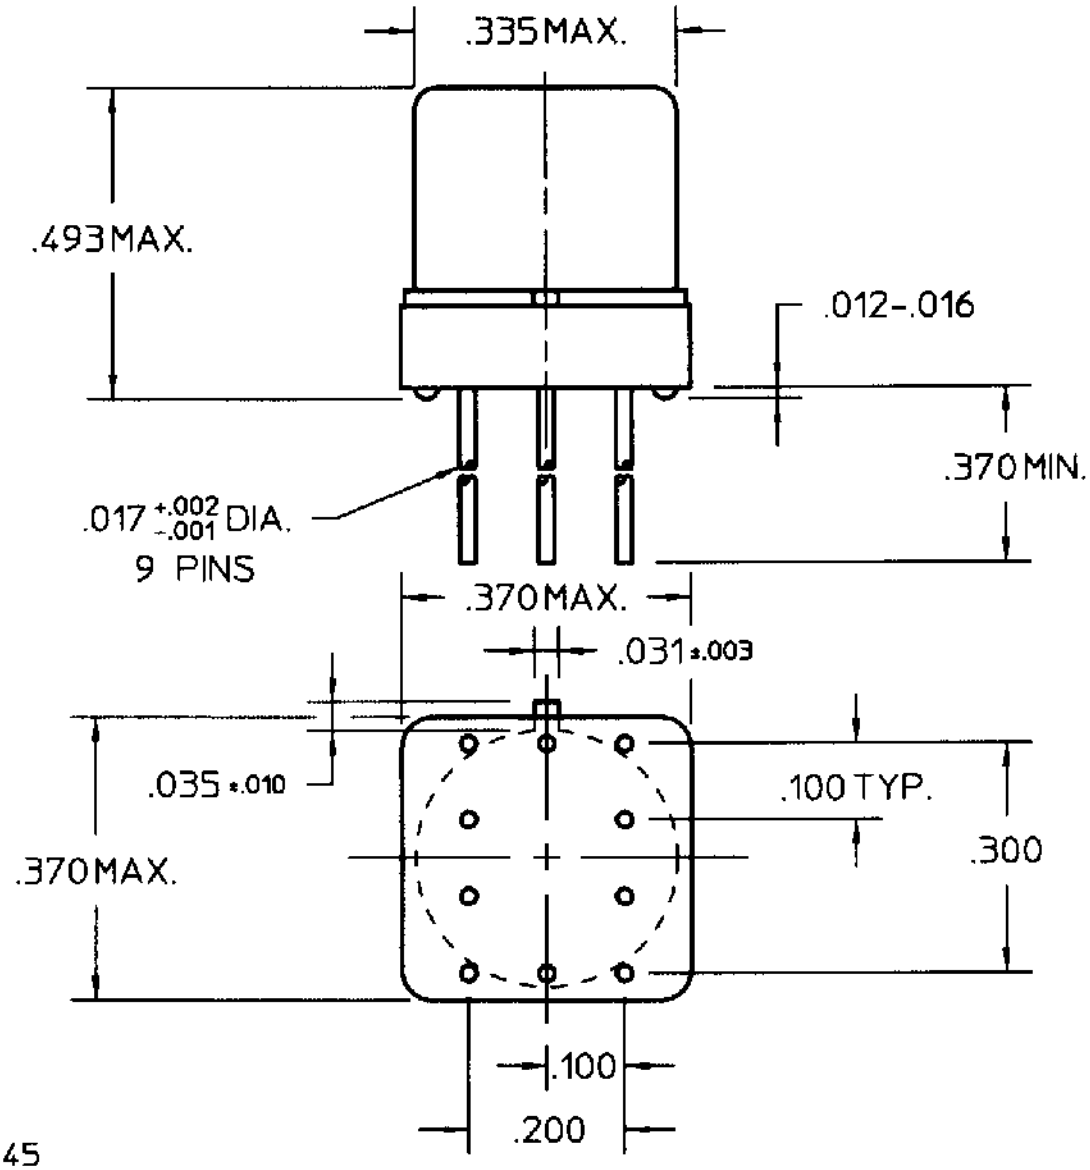


REV. 0
DCO 140945

COIL: @ 25°C

RESISTANCE	3300 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
TURN-ON BASE CURRENT	0.06 mADC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 4.0 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/4/99 CK. 3-4-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M28776/3-046L

TYPE JMST RELAY

JMSCT-26XLS

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3631B101LL MPT100C18RF SMW73R0JT 917696-1 RH73H2A40MKTN 1903112-2 2-292161-3 2005330-1 2377783-2 2380312-2 SBCHE64R7K U5254-000005-030PA 1-962915-1 1393431-1 1743455-2 175977-2 2310537-1 3430B2F51RTDF CPF0402B37K4E1 CRGCQ2010J3K3 3-1393225-0 936348-1 ROX05SJ18R 141991-2 1969656-1 2834055-1 TE50BR39J 1-794222-0 650075-000 SBCHE154R7K