
UPA2751GR-E1-AT

Dual N-Channel Enhancement Mode MOSFET

Description

The UPA2751GR-E1-AT uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a Battery protection or in other Switching application.




SOP-8

General Features

V_{DS} = 30V I_D = 10A

$R_{DS(ON)}$ < 12mΩ @ V_{GS}=10 V

$R_{DS(ON)}$ < 18mΩ @ V_{GS}=4.5V



Dual N-Channel MOSFET

Application

Battery protection

Load switch

Uninterruptible power supply

Package Marking and Ordering Information

Product ID	Pack	Brand	Qty(PCS)
UPA2751GR-E1-AT	SOP-8	HXY MOSFET	3000

Absolute Maximum Ratings@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_A=25℃	Drain Current, V_{GS} @ 4.5V[3]	10	A
I_D@T_A=70℃	Drain Current, V_{GS} @ 4.5V[3]	8	A
I_{DM}	Pulsed Drain Current[1]	55	A
P_D@T_A=25℃	Total Power Dissipation	2	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃
Rthj-a	Maximum Thermal Resistance, Junction-ambient[3]	62.5	℃/W

Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V_{DSS}	I_D=250μA, V_{GS}=0V	30			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=30V, V_{GS}=0V			1	uA
		V_{DS}=30V, V_{GS}=0V, T_J=55℃			5	
Gate-Body Leakage Current	I_{GSS}	V_{DS}=0V, V_{GS}=±20V			±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS} , I_D=250uA	1.5		2.5	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	V_{GS}=10V, I_D=10A			12	mΩ
		V_{GS}=10V, I_D=10A T_J=125℃			18	
		V_{GS}=4.5V, I_D=8A			16.5	
On State Drain Current	$I_{D(ON)}$	V_{GS}=10V, V_{DS}=5V	55			A
Forward Transconductance	g_{FS}	V_{DS}=5V, I_D=10A		43		S
Input Capacitance	C_{iss}	V_{GS}=0V, V_{DS}=15V, f=1MHz	610		910	pF
Output Capacitance	C_{oss}		88		160	
Reverse Transfer Capacitance	C_{rss}		40		100	
Gate Resistance	R_g	V_{GS}=0V, V_{DS}=0V, f=1MHz	0.8		2.4	Ω
Total Gate Charge (10V)	Q_g	V_{GS}=10V, V_{DS}=15V, I_D=10A	11		17	nC
Total Gate Charge (4.5V)			5		8	
Gate Source Charge	Q_{gs}			2.4		
Gate Drain Charge	Q_{gd}			3		
Turn-On DelayTime	$t_{d(on)}$	V_{GS}=10V, V_{DS}=15V, R_L=1.5Ω, R_{GEN}=3Ω		4.4		ns
Turn-On Rise Time	t_r			9		
Turn-Off DelayTime	$t_{d(off)}$			17		
Turn-Off Fall Time	t_f			6		
Body Diode Reverse Recovery Time	t_{rr}	I_F= 10A, dI/dt= 500A/us	5.6		8	
Body Diode Reverse Recovery Charge	Q_{rr}		6.4		9.6	nC
Maximum Body-Diode Continuous Current	I_S				2.5	A
Diode Forward Voltage	V_{SD}	I_S=1A,V_{GS}=0V			1	V

Note.The static characteristics in Figures 1 to 6 are obtained using <300us pulses, duty cycle 0.5% max.

Typical Characterisitics

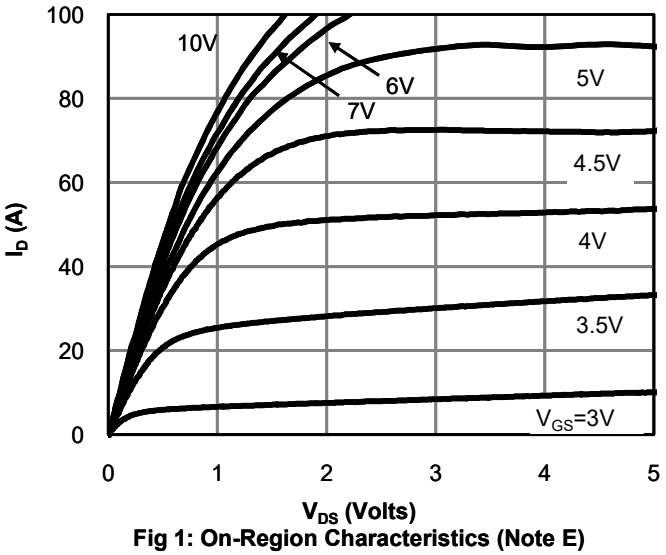


Fig 1: On-Region Characteristics (Note E)

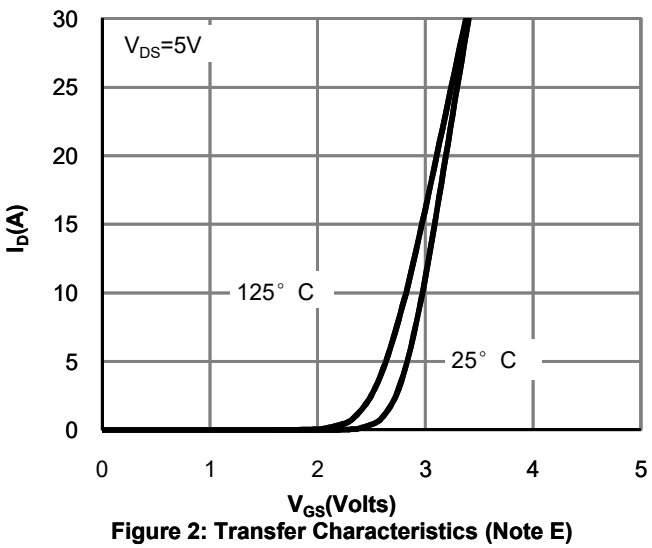


Figure 2: Transfer Characteristics (Note E)

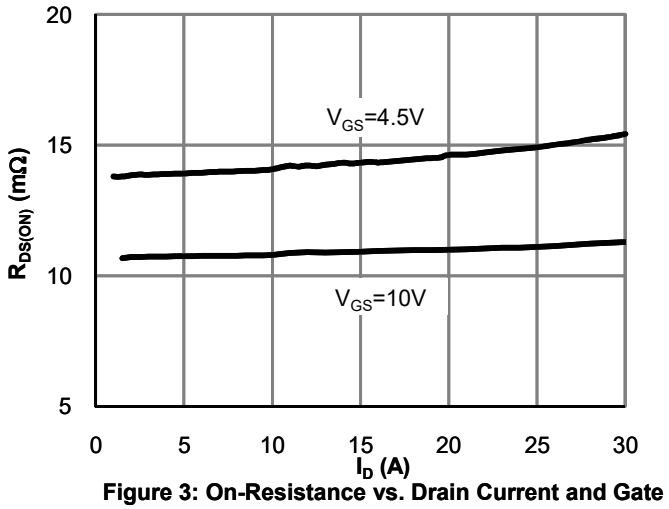


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

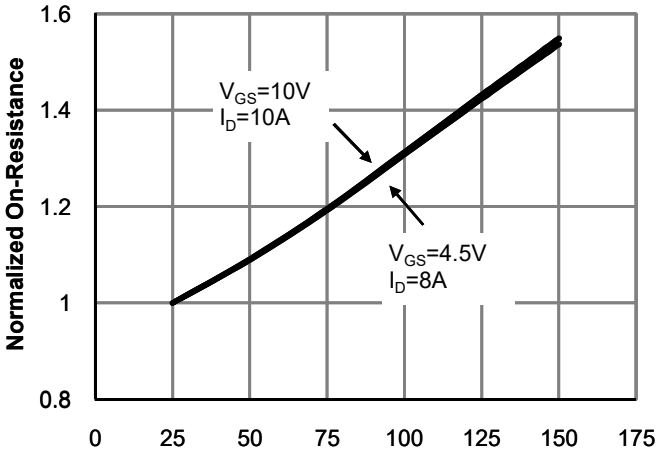


Figure 4: On-Resistance vs. Junction Temperature (Note E)

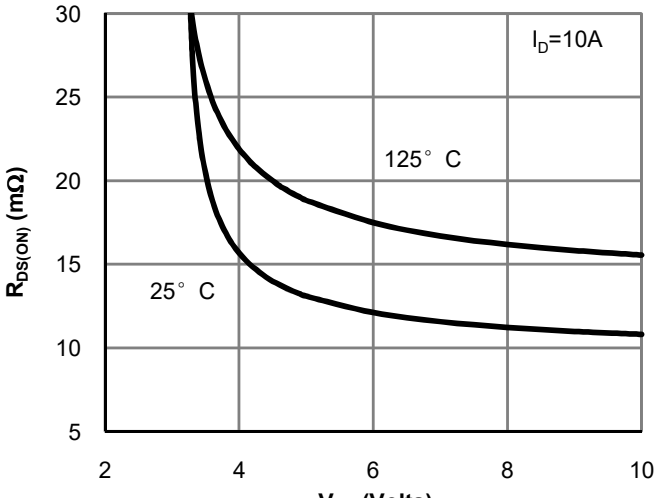


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

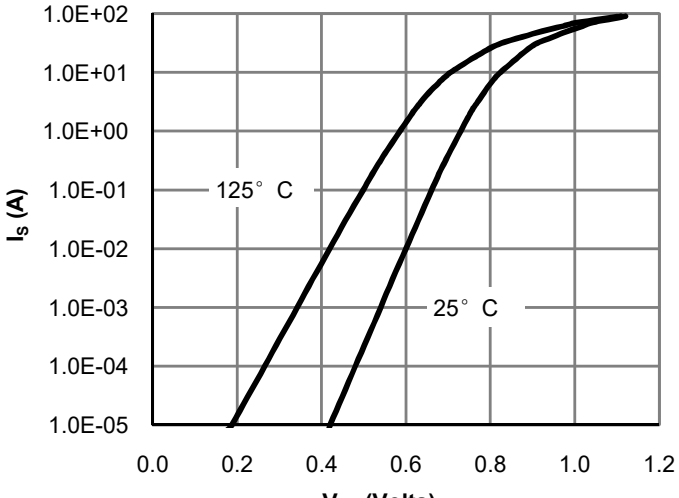


Figure 6: Body-Diode Characteristics (Note E)

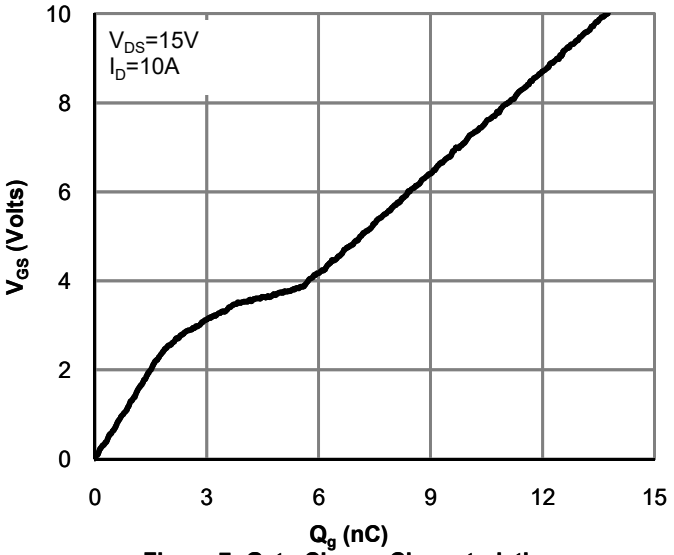


Figure 7: Gate-Charge Characteristics

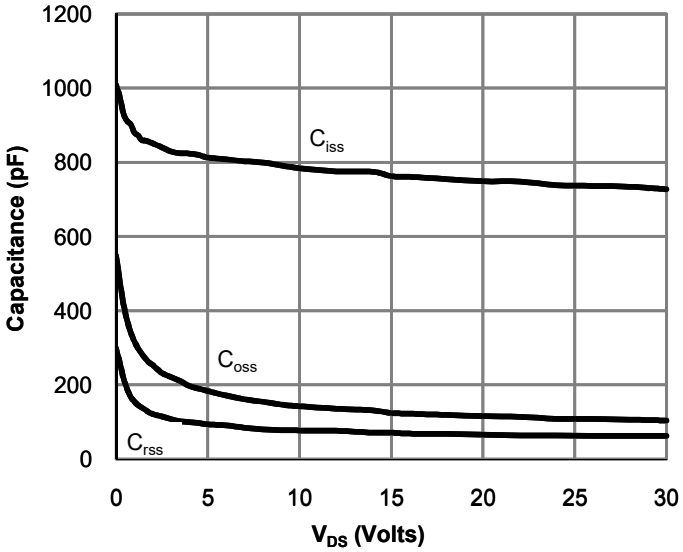


Figure 8: Capacitance Characteristics

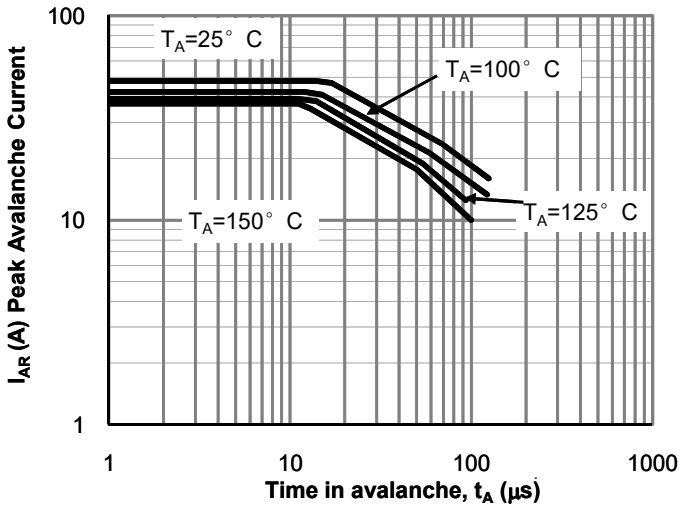


Figure 9: Single Pulse Avalanche capability (Note C)

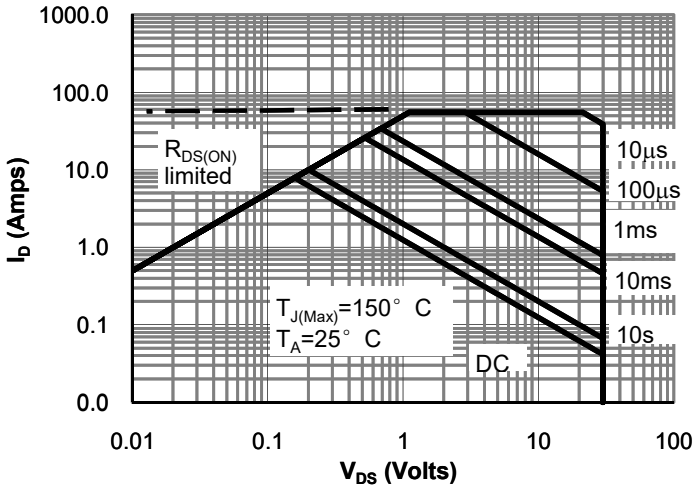


Figure 10: Maximum Forward Biased Safe Operating Area (Note F)

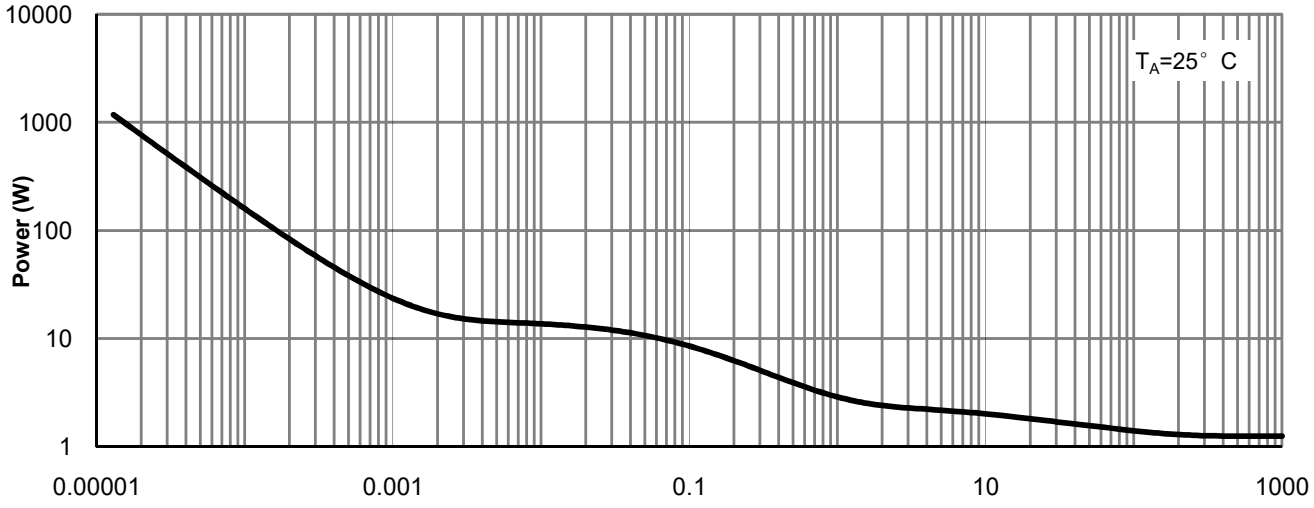


Figure 11: Single Pulse Power Rating Junction-to-Ambient (Note F)



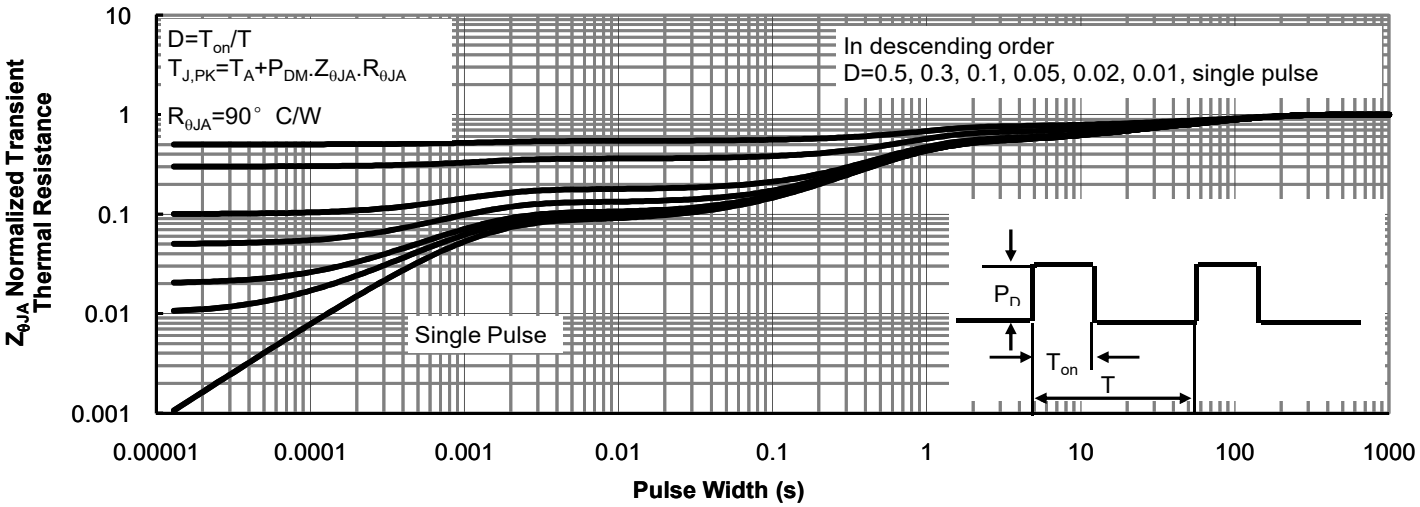


Figure 12: Normalized Maximum Transient Thermal Impedance (Note F)

SOP-8 Package Outline Dimensions

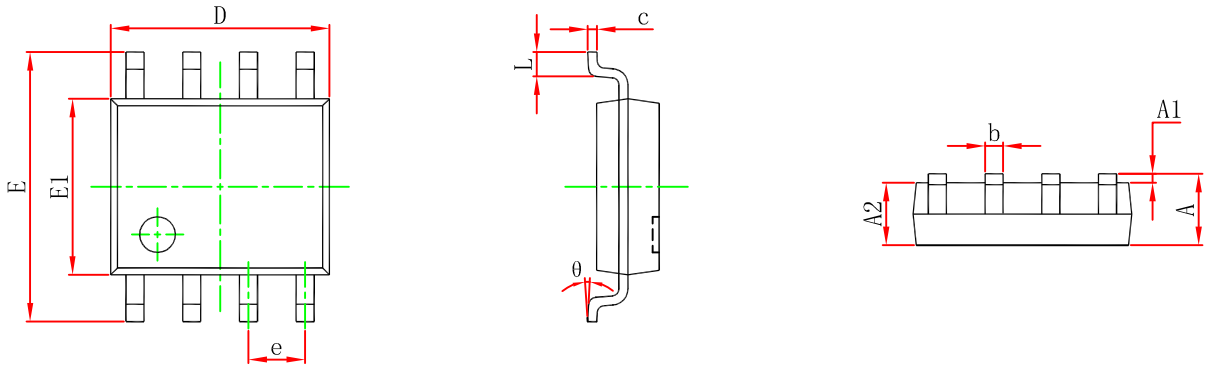

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	**Max**	**Min**	**Max**
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

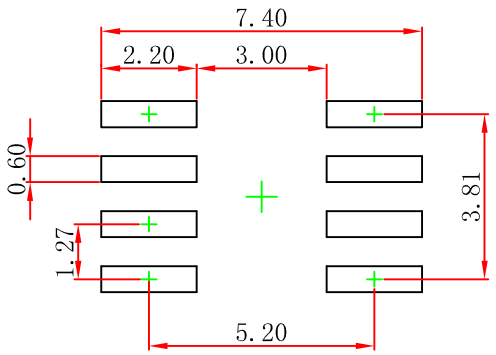

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer’s products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer’s products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HXY MOSFET:

TPSMB100CA-VR IRLML6246PBF SS510C SS5150B BZT52C3V3S MMBT3904T PESD5V0S1BB SD15C BZT52C13 HT7150 P6SMB200A SS1045 US2M HXY2300MI MAX487ESA SQJA04EP-T1_BE3 HC3D10170A HC4D20120A HESDNC5VB1AF-B HOPA2340UA P6SMB33CA TPSMB28A-VR DTC143ZE HMCP602-I/SN HXY2101EI HXY8205ES HAD8542ARZ HT7540-1 P6SMB36CA SS10100