

由 AUTODESK 学生版生成

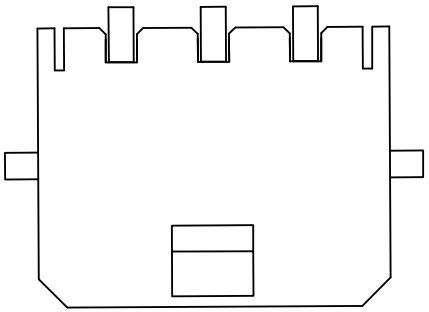


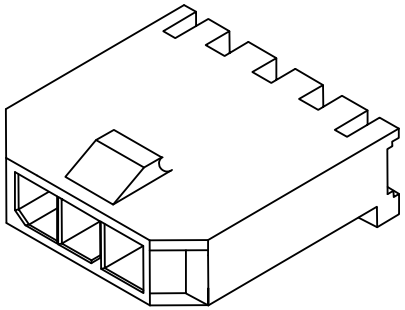



X3025 W R S- 12 D-LP SW
01 02 03 04 05 06 07 08 09

01 Series No.
02 Category：
W-wafer
03 Welding Board Angle:
R-90°
04 Welding Way:
S-SMT
05 Row No.-Pin No.
XX-Single row
06 Special NO.
D-Solder Tabs
07 Material：
LP-LCP 94V-0
08 Planting Category:
V**:All Gold-Plated
G**:Gold-Plated Contact
*01-Gold Flash ; *02-2U" ; *03-3U" ; *05-5U"
*10-10U" ;*15-15U" ; *30-30U" ; *50-50U"
SN-Bright tin plating 70U"
SN1-Bright tin plating 120U"Min. ;
SW-Fog Tin plating
09 Color：
Blank-natural color

Poles	Dimensions		
	A	B	C
2	6.85	3.00	14.20
3	9.85	6.00	17.20
4	12.85	9.00	20.20
5	15.85	12.00	23.20
6	18.85	15.00	26.20
7	21.85	18.00	29.20
8	24.85	21.00	32.20
9	27.85	24.00	35.20
10	30.85	27.00	38.20
11	33.85	30.00	41.20
12	36.85	33.00	44.20

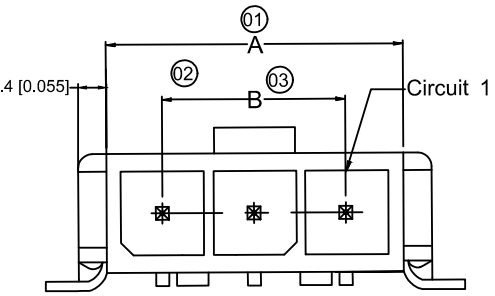

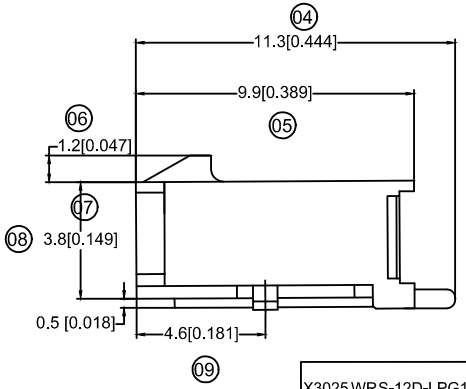

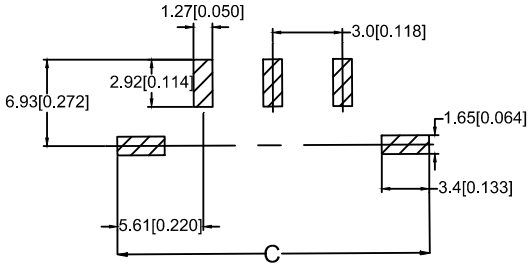

P.C.B. LAYOUT

Specifications：

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10m Ω
- After environmental testing ： ≤20mΩ
- Mark"*"Indicate Dimensions Need To Controlled In Emphasis

X3025WRS-12D-LPG15	LCP UL 94V-0	Brass	Contact Area Gold: 15u" Min.	Brass	Tin-Plated	X3025H
X3025WRS-12D-LPSW	LCP UL 94V-0	Brass	Tin Plating Fog	Brass	Tin-Plated	X3025H
PART N0	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XK B Housing

					ANGLAR	±5°
ΔX				XKB	L≤4	±0.2
ΔX					4<L≤16	±0.3
ΔX					16<L≤63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L>63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com					XKB INDUSTRIAL PRECISION CO.,LIMITED	

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

MODEL TYPE: 3.00 mm Crimp Style Connectors
PART NO.: X3025WRS-12D-LPSW
DWG NO.: X-X3025WRS-12D-LPSW

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

由 AUTODESK 学生版生成