

SPECIFICATION CONTROL DRAWING


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	3/22/99	R. RICE


ALL DIMENSIONS ARE REFERENCE ONLY

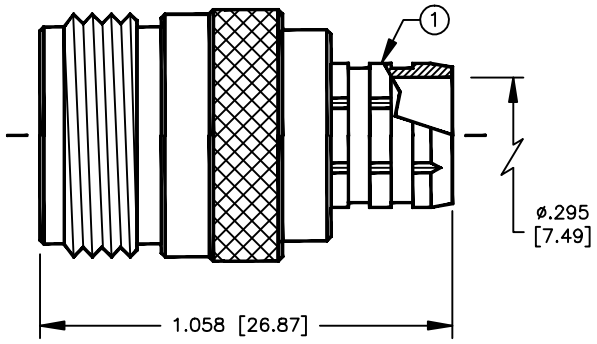

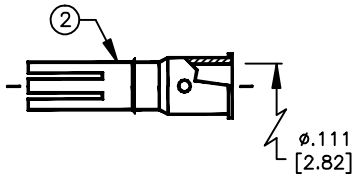

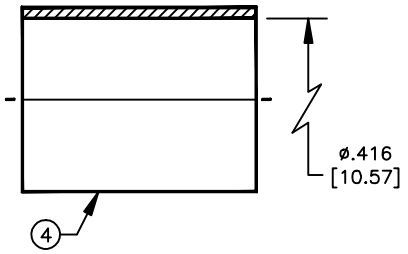



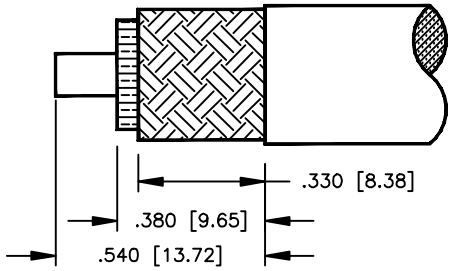

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED DIES: .128 & .429

000000

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0–11 GHz
INSERTION LOSS: ≤ –.2 dB @ 10 GHz
VSWR MAX: 1.3:1 @ 9 GHz
FOR BELDEN 89913 (PLENUM) CABLE

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
6	HEAT SHRINK TUBING	1	TUB–S500A–BK2	BLACK
5	PRESS FIT SLEEVE	1	BRASS	SILVER
4	FERRULE [FER–205]	1	BRASS	SILVER
3	DIELECTRIC	1	PTFE	NONE
2	CONTACT [CON–309–10]	1	BRASS	GOLD
1	BODY	1	BRASS	SILVER

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:
DECIMALS DIAMETER

DRAWN C. ZUNIGA	3/22/99
CHECKED	
ORJ DRAWN C. ZUNIGA	3/22/99
APPROVALS	DATE

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(619)549–6340
(619)549–6345 FAX

RFN–1028–PL

N FEMALE CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	PL	9121	A

SCALE: 2:1 | CAD FILE 13ARC B | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFW-5573-60 COMP-TM-400PL RF123-7002-B RFU-632 RFW-5573-16 RSA-3402 RSA-3478 RF123-7052-1B RFU-601-1X RFB-1137 RFN-1007-2SX RFU-500 RFW-12404-30-5 RFU-600-5 RFU-600-6C1 RFU-602-2 RFW-5573-7 RFU-505 RFD-1610DS-H4 RFT-1239 RFU-633 RFD-1601-HPL RQA-5000-SR2LP RFU-507-SI RFD-225M-SR2 RQA-5010-SR2LP RFB-1124-1X RFU-601-3 RQN-1300-SR2 RSA-3252-C