
*** UNCONTROLLED DOCUMENT * FOR REFERENCE ONLY**

STEWARD

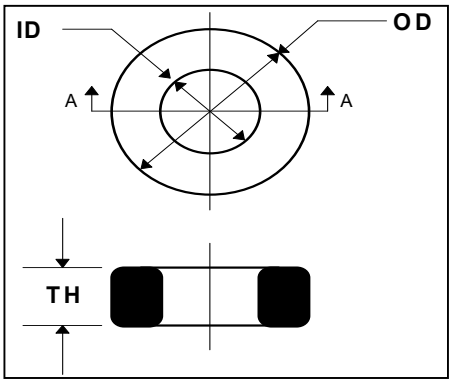

CORE DIMENSIONS					
UNCOATED CORE					**35T1000-000**
	MM	INCHES		MM	INCHES
OD	**25.40**	(1.000)	±	.51	(.020)
ID	**15.50**	(.610)	±	.51	(.020)
TH	**10.00**	(.394)	±	.25	(.010)
EPOXY COATING					**35T1000-00H**
OD	**26.67**	(1.050)	±	max	
ID	**14.23**	(.560)	±	min	
TH	**11.02**	(.434)	±	max	

WEIGHT / K 15.4224 KGS 34.0000 LBS

INITIAL PERMEABILITY **5000**

ELECTRICAL SPECIFICATIONS								
	MIN (μH)	MIN TOL.	NOM (μH)	MAX (μH)	MAX TOL.	FREQ. (kHz)	VOLT. (V)	TURNS
L1	3.864	(-20%)	4.830	5.796	+20%	100	≤ .0215	1
L2	386.4	(-20%)	483.0	579.6	+20%	100	≤ .2154	10
Q	10	-	-	-	-	100	≤ .0215	1

COATING SPECIFICATIONS					
	TYPE	Max. Coating Thickness (mm)	Min. DLB VAC	Min. DLB VDC	TEST FORCE (LB)
35T1000-000	UNCOATED	-	-	-	-
35T1000-00H	EPOXY	0.76	1000	1333	4.93

NOTES

Steward

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Date:	01/05/2006	DWG #:	35T1000-00H-E	Title:	REV:
Drawn By:	JRK			**35T1000-00H**	**E**

REV	Description	ECN #	Date	INT
E	Chg coating description from Poly to Epoxy Add Kgs to weight		01/05/06	JRK

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Laird:

A15754-04 28B0734-000 29220104 HI1206N680R-10 TRA6927M3PBN-001 28A0392-0A2 28A1507-0A2 CMX1211Z680B-10 DA1206D301R-10 MGV201610R68M-10 NS1050HA 28A2005-0A2 LI0603B201R-10 TYS30126R8M-10 0097061102 28B0500-100 HF0402B102R-10 LI0603G221R-10 CM3440Z171R-10 MI1210K600R-10 CMX1211Z601B-10 0097064502 28R1141-010 DM3312X101R-10 MP1040-100 HI0805O121R-10 LFB095051-000 MI0805M221R-10 CC1812C513R-10 24296254