General Description

The IRFR120NTRPBF use advanced SGT MOSFET technology to provide low RDS(ON), low gate charge, fast switching and excellent avalanche characteristics.

This device is specially designed to get better ruggedness and suitable to use in.



TO-252-2L
(TO-252-2(DPAK))

General Features

V_{DS} = 100V I_D =12 A

$R_{DS(ON)}$ < 120mΩ @ V_{GS}=10V



N-Channel MOSFET

Applications

Consumer electronic power supply

Motor control

Synchronous-rectification

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
IRFR120NTRPBF	TO-252-2L(TO-252-2(DPAK))	12N10 XXXXX	2500

Absolute Maximum Ratings at T_j=25℃ unless otherwise noted

Symbol	Parameter	Value	Unit
VDS	Drain source voltage	100	V
VGS	Gate source voltage	±20	V
ID	Continuous drain current[1)]	12	A
ID, pulse	Pulsed drain current[2)]	24	A
P_D	Power dissipation[3)]	17	W
EAS	Single pulsed avalanche energy[4)]	1.2	mJ
Tstg，Tj	Operation and storage temperature	-55 to 150	℃
RθJC	Thermal resistance, junction-case	6.6	℃/W
RθJA	Thermal resistance, junction-ambient[5)]	62	℃/W

Electrical Characteristics T_C=25℃ unless otherwise specified

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS} = 0V, I_D = 250μA	100	110	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 100V, V_{GS} = 0V	-	-	1	μA
I_{GSS}	Gate to Body Leakage Current	V_{DS} = 0V, V_{GS} = ±20V	-	-	±100	nA
On Characteristics note3						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250μA	1.0	1.8	3.0	V
$R_{DS(on)}$	Static Drain-Source On-Resistance note2	V_{GS} = 10V, I_D = 3A	-	95	120	mΩ
Dynamic Characteristics note4						
C_{iss}	Input Capacitance	V_{DS} = 50V, V_{GS} = 0V, f = 1.0MHz	-	196	-	pF
C_{oss}	Output Capacitance		-	25.9	-	pF
C_{rss}	Reverse Transfer Capacitance		-	21.4	-	pF
Q_g	Total Gate Charge	V_{DS} = 50V, I_D = 3A, V_{GS} = 10V	-	4.3	-	nC
Q_{gs}	Gate-Source Charge		-	3.5	-	nC
Q_{gd}	Gate-Drain(“Miller”) Charge		-	3.1	-	nC
Switching Characteristics note4						
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = 50V, I_{DS}=3A R_G = 2Ω, V_{GEN} = 10V	-	14.7	-	ns
t_r	Turn-On Rise Time		-	3.5	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	20.9	-	ns
t_f	Turn-Off Fall Time		-	2.7	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current note2		-	-	4.5	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	12	A
V_{SD}	Drain to Source Diode Forward Voltage note3	V_{GS} = 0V, I_S =3A	-	-	1.3	V
t_{rr}	Body Diode Reverse Recovery Time	V_{GS} = 0V, I_F = 3A, di/dt =100A/μs	-	32.1	-	ns
Q_{rr}	Body Diode Reverse Recovery Time Charge		-	39.4	-	nC
I_{rrm}	Peak Reverse Recovery Current		-	2.1	-	A

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤2%.
4. Guaranteed by design, not subject to production
5. V_{DD}=50 V, R_G=50 Ω, L=0.3 mH, starting T_j=25 °C

Typical Performance Characteristics

Figure1: Output Characteristics

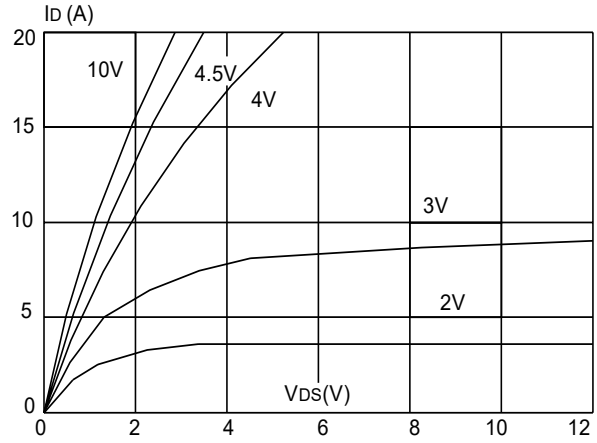

Figure 2: Typical Transfer Characteristics

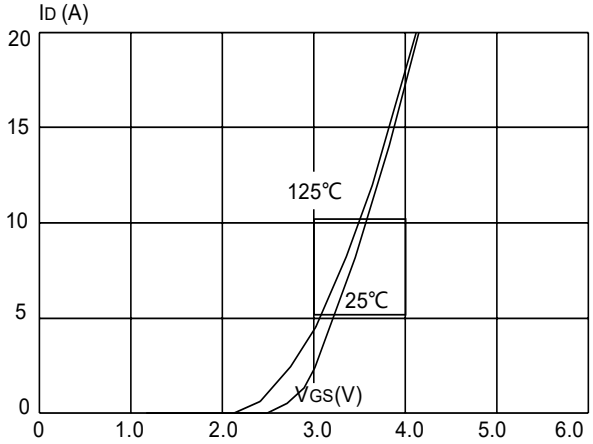

Figure 3: On-resistance vs. Drain Current

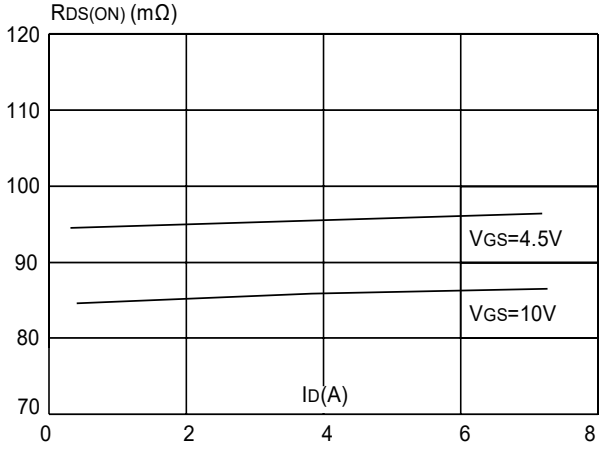

Figure 4 : Body Diode Characteristics

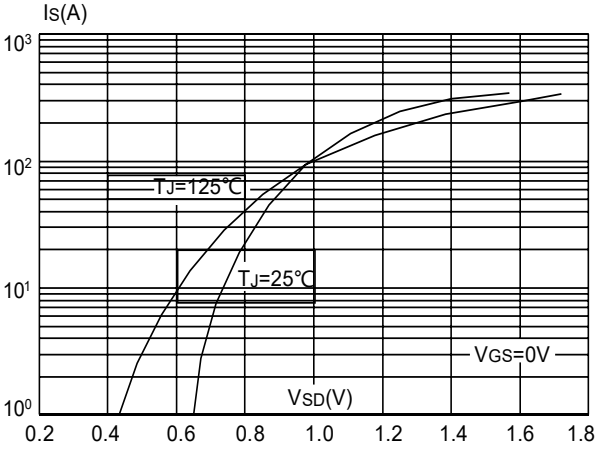

Figure 5: Gate Charge Characteristics

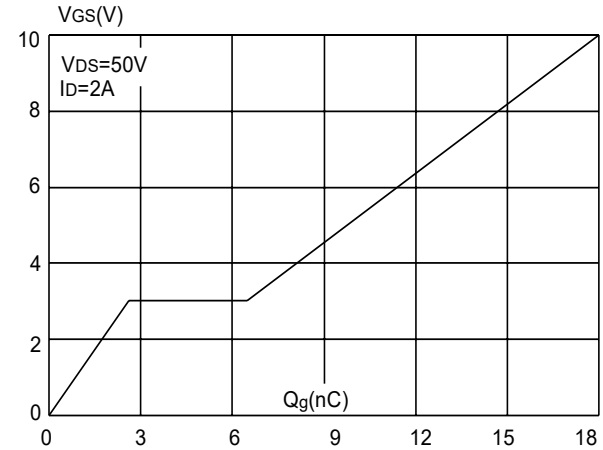

Figure 6: Capacitance Characteristics

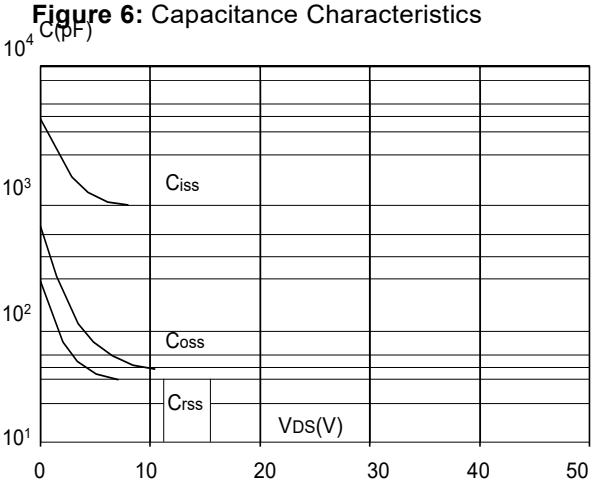

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

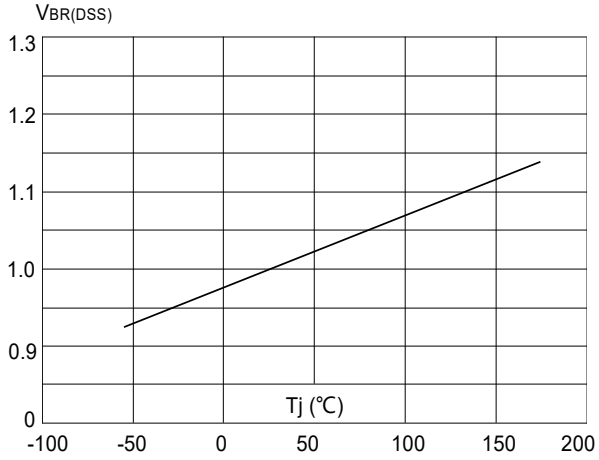

Figure 8: Normalized on Resistance vs. Junction Temperature

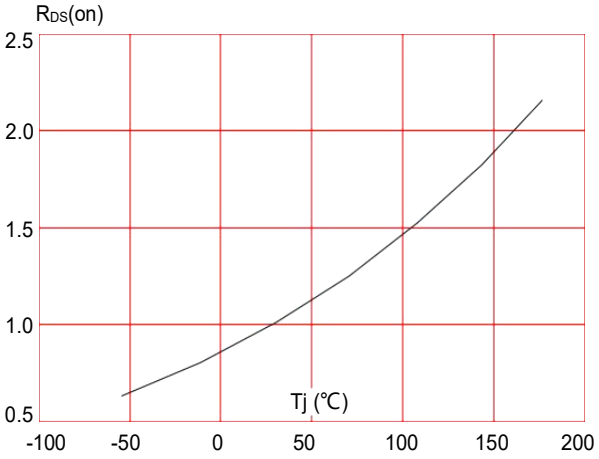

Figure 9: Maximum Safe Operating Area

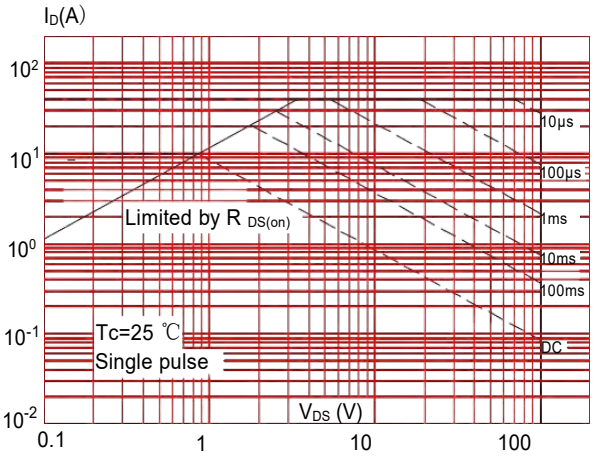

Figure 10: Maximum Continuous Drain Current vs· Case Temperature

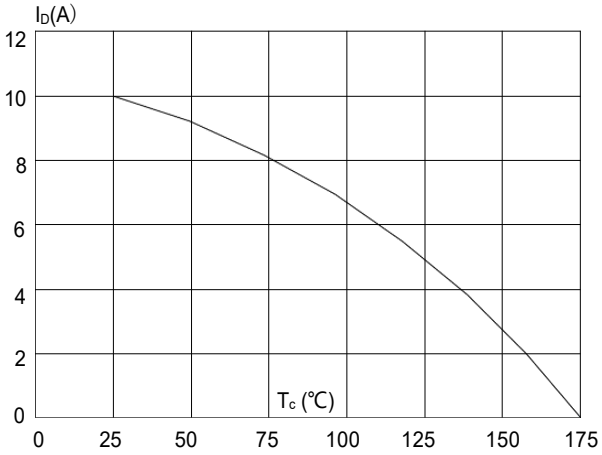

Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

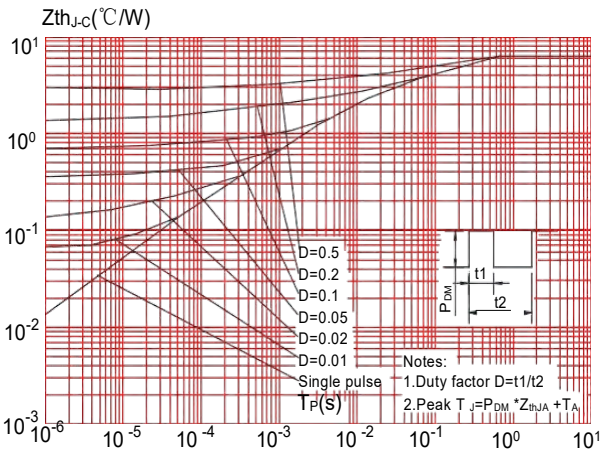

TO-252-2L(TO-252-2(DPAK)) Package Information

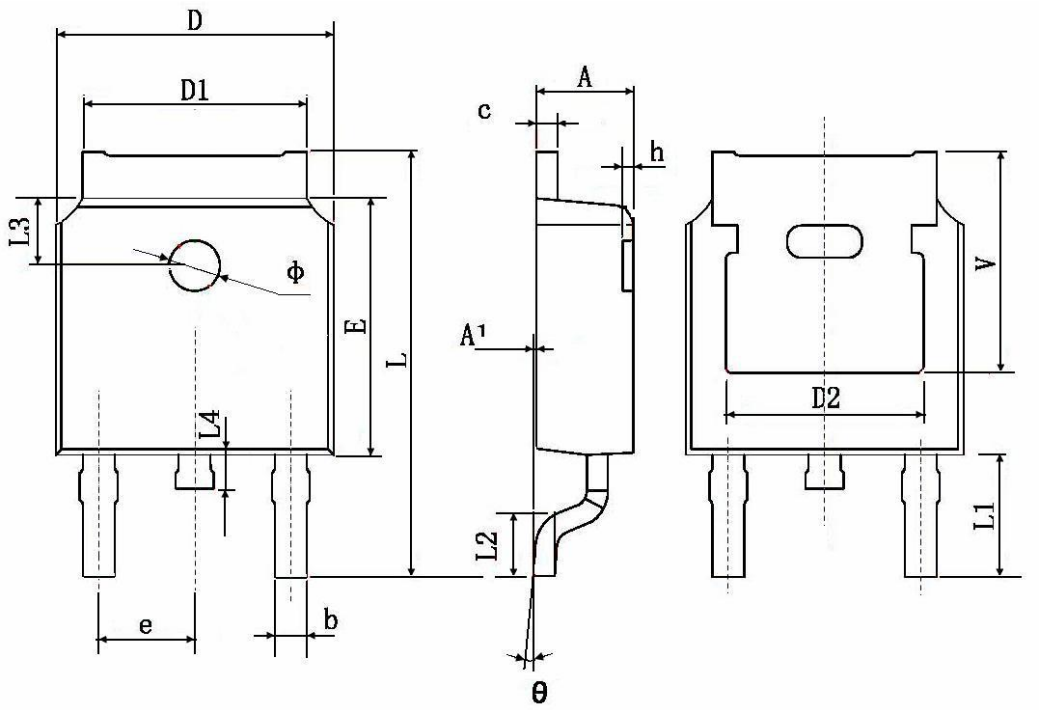

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	0.483 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HXY MOSFET:

HC4D20120A P6SMB200A SD15C HC3D10170A HT7150 HXY2101EI P6SMB33CA SQJA04EP-T1_BE3 TPSMB100CA-VR HESDNC5VB1AF-B HXY8205ES BZT52C3V3S HMCP602-I/SN SS10100 SS1045 SS510C HAD8542ARZ SS5150B HXY2300MI HT7540-1 HOPA2340UA IRLML6246PBF MAX487ESA P6SMB36CA PESD5V0S1BB TPSMB28A-VR BZT52C13 DTC143ZE MMBT3904T US2M