

环保物料


TEL:0769-82001899

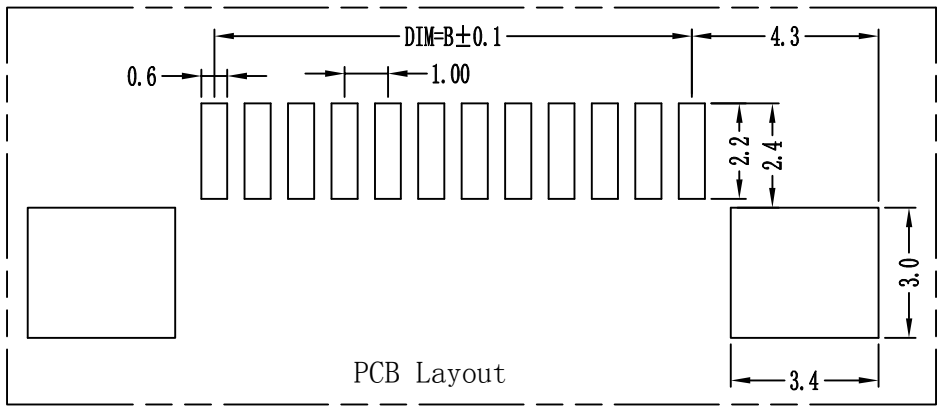


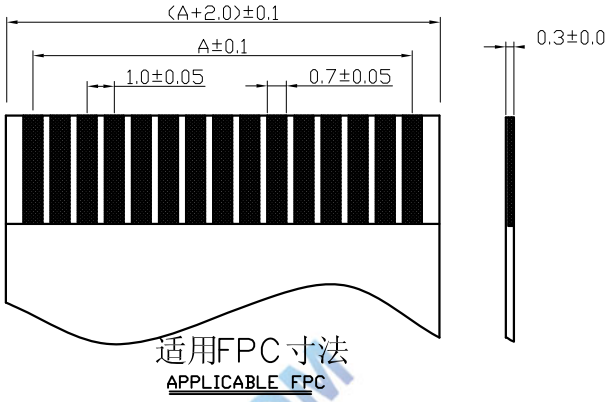

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: −25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤ 20mΩ
Insulation resistance: ≥800mΩ
Relative Humidity: 93%+40°C

Material Description:
Contact: Phosphor Bronze Tin−Leadplated
Solder Tab: Phosphor Bronze Tin−plated
Housing: Thermoplastic(UL94V−0)
Slider: Thermoplastic(UL94V−0)

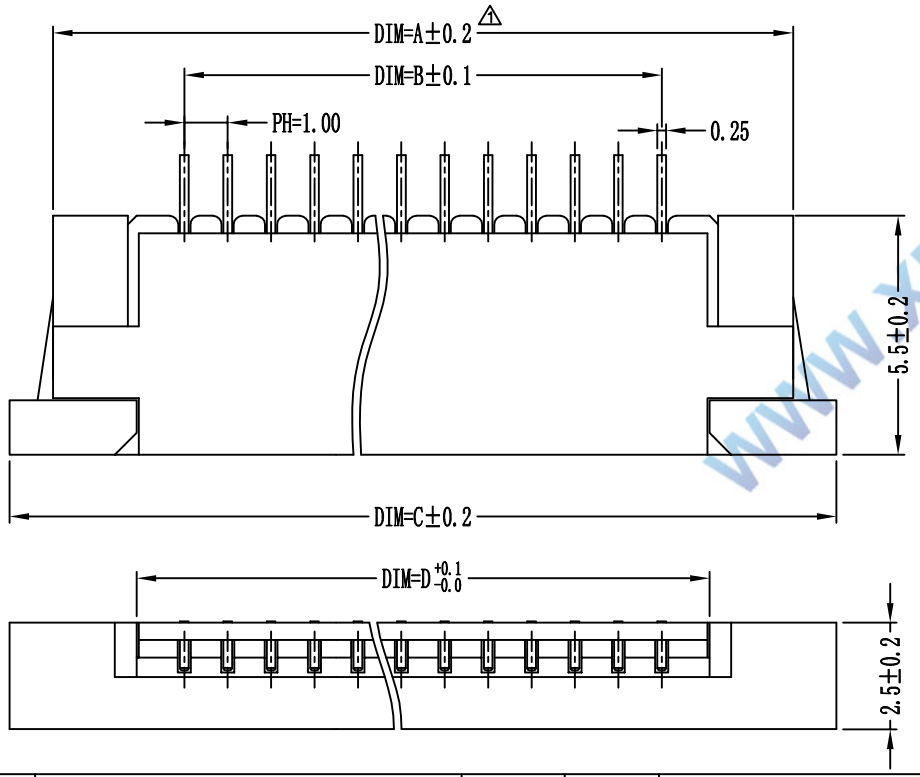



下接触

F1001-B-xx-25T-x
- B=下接 T=上接
- Pin位数
- T=镀锡 G=镀金
- R=卷装 无=管装

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.1	29.00	37.0	31.10
29P	34.1	28.00	36.0	30.10
28P	33.1	27.00	35.0	29.10
27P	32.1	26.00	34.0	28.10
26P	31.1	25.00	33.0	27.10
25P	30.1	24.00	32.0	26.10
24P	29.1	23.00	31.0	25.10
23P	28.1	22.00	30.0	24.10
22P	27.1	21.00	29.0	23.10
21P	26.1	20.00	28.0	22.10
20P	25.1	19.00	27.0	21.10
19P	24.1	18.00	26.0	20.10
18P	23.1	17.00	25.0	19.10
17P	22.1	16.00	24.0	18.10
16P	21.1	15.00	23.0	17.10
15P	20.1	14.00	22.0	16.10
14P	19.1	13.00	21.0	15.10
13P	18.1	12.00	20.0	14.10
12P	17.1	11.00	19.0	13.10
11P	16.1	10.00	18.0	12.10
10P	15.1	9.00	17.0	11.10
9P	14.1	8.00	16.0	10.10
8P	13.1	7.00	15.0	9.10
7P	12.1	6.00	14.0	8.10
6P	11.1	5.00	13.0	7.10
5P	10.1	4.00	12.0	6.10
4P	9.1	3.00	11.0	5.10

WWW.XFCONN.COM

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X° .	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	FPC 1.00mm Connectors
PART. NO.	F1001-B-xx-25T

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

M2010V-04P XF-P000167 XF-P000237 M2016V-08P P1257-05P TT44080080-0820 XF-P000141 XF-P000143 XF-P000159 XF-P00065 XF-P00115 T2026PS-2 M2016V-05P F1001-T-16-25T-R PZ200V-11-05P XF-2501L3003P3 XF-P00092 XF-P00099 F1003-ZV-26-25T-R XF-12571503P3 XF-P00014 M2010V-07P PZ200V-11-08P XF-P00001 XF-P000223 M1250VS-05P M2545V-02P P1257-04P PZ254V-11-11P XF-P00126