



由 Autodesk 教育版产品制作


MAPX	MODIFICATION	DATE






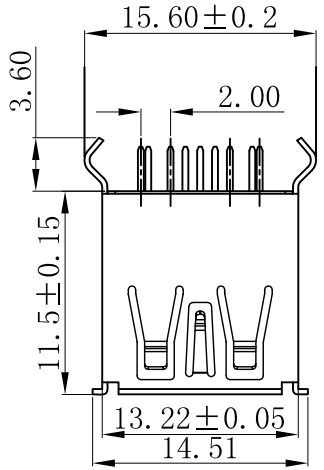

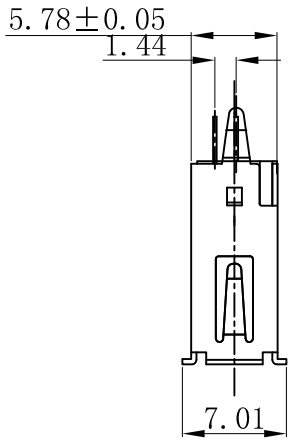

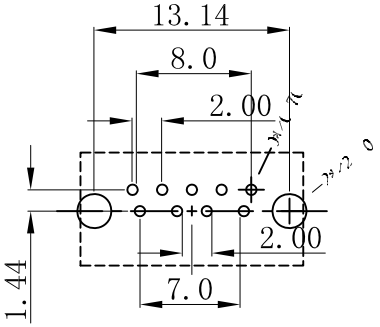

RECOMMENDED P.C.B LAYOUT(±0.05)

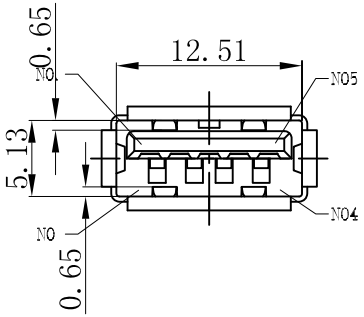

NOTES:
1.ELECTRONIC:
CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
2.MECHANICAL:
DURABILITY: 1500 CYCLE.
3.ENVIRONMENT CHARACTERISTICS:
OPERTING TEMPERATURE:-55? TO +105?
4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

No.	PART NAME	QTY	MATERIAL	REMARK
5	SHELL	1	COPPER ALLOY	NI PLATED
4	5PIN	5	COPPER ALLOY	AU/TIN PLATED
3	4PIN	4	COPPER ALLOY	AU/TIN PLATED
2	COVER	1	THERMOPLASTIC	(UL 94V-0) BLUE
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLUE

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.01	.XX	±1.°
.XXX	±0.002	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	邱建辉	制图料号 PRODUCT PART NO.	916-152A205EY10200		
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	USB AF 3.0/180度11.5弯脚有边铜壳LCP蓝胶24H		
日期 DATE	20160728	核准 APPD	黄国荣	角法 VIEW		版本 VER	A□

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-232A2031S10100 906-752B1114D10200 920-A62A2021S10104 908-351A1011D10100
910-151A2021D10100 916-151A1022Y10200 907-111A1022D10200 904-232B2032S10100
917-B88C201AH70201 917-P81A202ES60201 920-154A2021Y10110 920-C62A2021S10103
919-162A1012D10400 920-F52A2021S10105 920-A64A2091S101A3 906-262A1021D10200
906-552A1012D10200 907-312A1101Y10210 911-221A2021S10100 918-318K2023C40005
904-331B2032S10200 912-112A1011D10100 912-112A2021S10100 912-312A1012D10100
918-415K3028S40000 918-468K2029Y50000 920-A62A2021S10108 905-761A2032S10200
918-418K2022Y40011 920-C52A2021S10105