
This document contains proprietary information and such informationmay not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

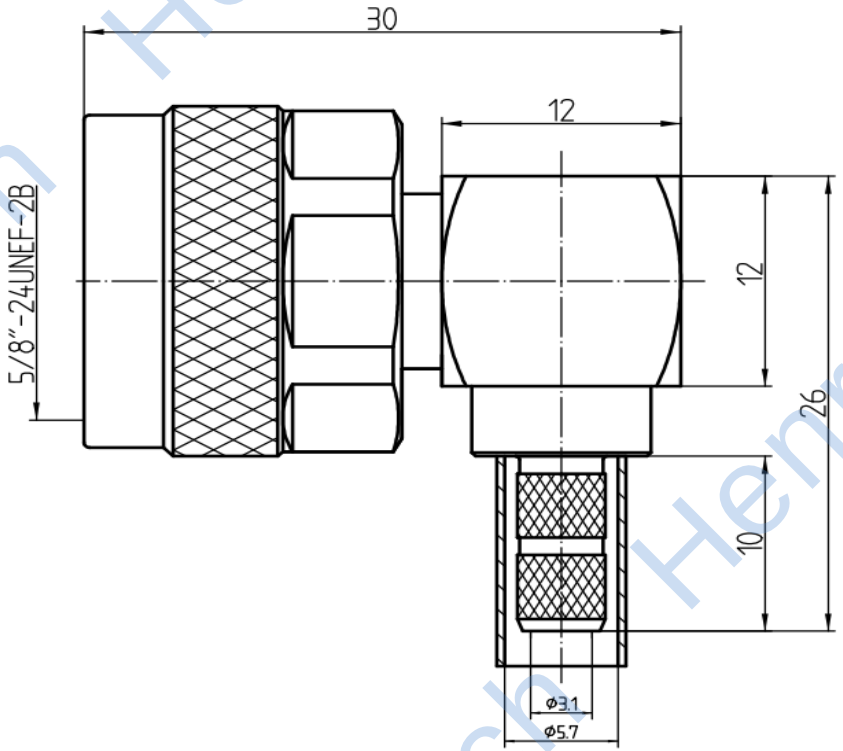

1 Electrical

1.1 Impedence	50Ω
1.2 Frequency	DC~6GHz
1.2 Dielectric withstanding voltage	1500V(volts RMS)
1.3Working Voltage:	1000V rms
1.5 Insulation resistance:	≥5000MΩ
1.6 VSWR	1.30:1


2 Environmental&Mechanical

2.1 Temperature range	-40℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating (Micro-inch)

3.1 Body:	Brass, nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Brass, Gold plated
3.4 Housing:	Brass, nickel plated
3.5 Coupling nut:	Brass, nickel plated
3.6 Ferrule:	copper, nickel plated

Recommended Cable Stripping Dimension

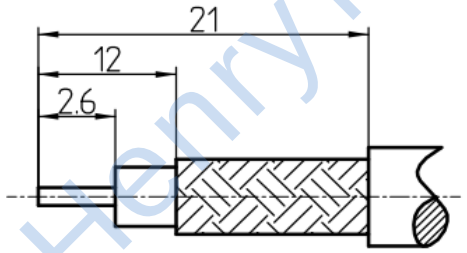

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector N Male R/A Conn. For RG142/RG223/RG58/LMR200 Cable	HenryTech			
ENGINEER: L. yu 19/03/17		DIMENSION IN MILLIMETERS (mm)			
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-N-JW5Y-F	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

H3-MABA-007871-CT1A40 H3-MABA-011085 H3-TC1-1TG2+ HG-SCN-2-65+ HL-SMA-KHD4 HN-DC2016-0.5(12-4.6)M HT-HFCN-2700+ HT-HFCN-3800+ HT-LFCG-530+ HX-N-JK HG-SCN-2-22+ HL-N-KKC HL-SMAMF-2-18-15dB HT-LFCG-1700+ HL-SSMA-KHD-1 HT-LFCN-3800+ HT-QCN-19+ HX-1.85-JJ HL-SMB-K3DY HX-SMA/SMP-JK HL-SMA/SMB-KK HLCC2250G HN-LP7-0.5-1.27(9.4-2.8) HT-BFHKI-1572+ H2SYDC-20-62HP+ H3-MABA-010551-CF1071 H3-MAPD-008109-C30040 HL-MCX-KE-02 HT-LFCN-400+ HT-SCA-4-10+