



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

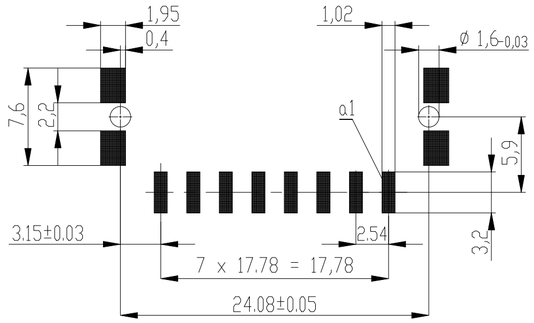

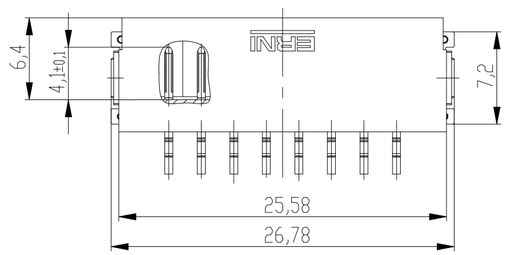



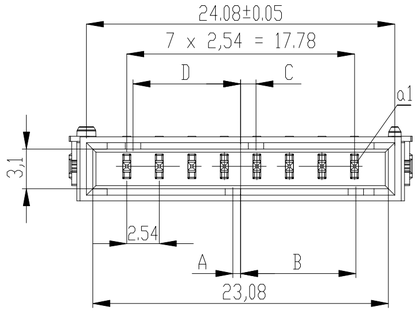


Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs



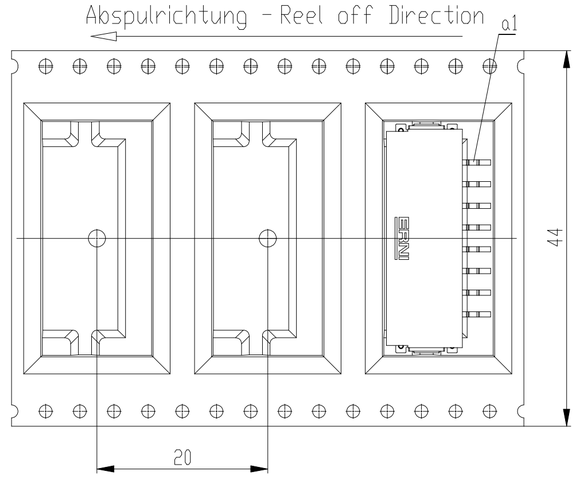

454197-E		weiß white	0,6	9	1,2	8,4	Codierung wie Variante schwarz Encoding such variant black
284124-E		rot red	4,2	5,4	4,8	4,8	
284123-E		grün green	3	6,6	3,6	6	
284122-E		blau blue	1,8	7,8	2,4	7,2	
284121-E		schwarz black	0,6	9	1,2	8,4	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Copyright by TE GmbH
Damage to, access pursuant to ISO 16016, to be observed.

Information:	Tolerances	All Dimensions in mm	Scale 3:1
Customer drawing: THIS DRAWING IS A CONTROLLED DOCUMENT.	Subject to modification without prior notice. Drawing will not be updated.	TE Connectivity	Designation: ERNI-M 2,54 SRC-A, 8-polig
e / Index	16.04.2013 / Date		© 224922-E / Class SRCA
			I / A2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3631B101LL 917696-1 SBCHE64R7K 1393431-1 2-292161-3 1969656-1 3-1393225-0 936348-1 MPT100C18RF SMW73R0JT U5254-000005-030PA 1-794222-0 2005330-1 2310537-1 3430B2F51RTDF TE50BR39J 1743455-2 175977-2 1903112-2 ROX05SJ18R 2377783-2 2834055-1 SBCHE154R7K RH73H2A40MKTN 2380312-2 650075-000 CPF0402B37K4E1 CRGCQ2010J3K3 1-962915-1 141991-2