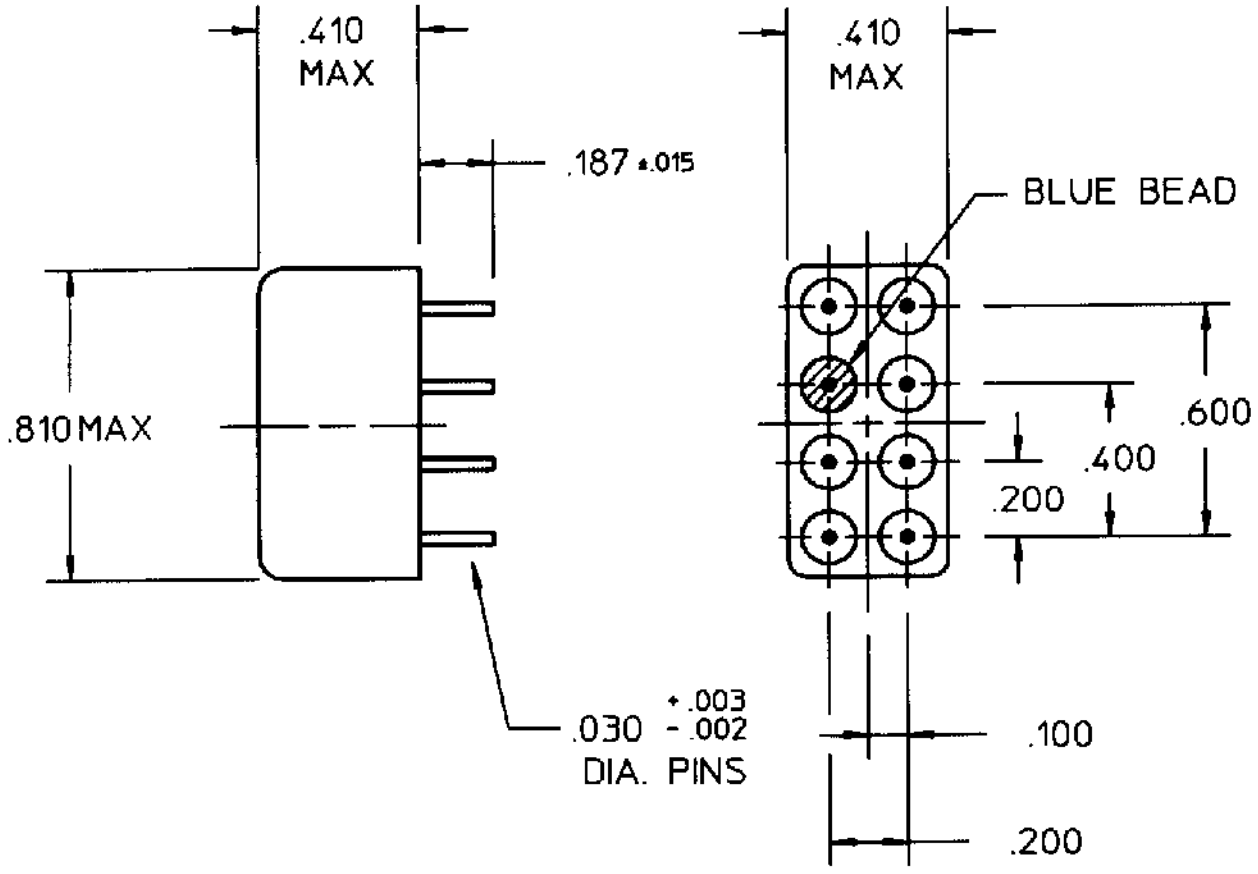


COIL: @ +25 °C

RESISTANCE 700 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 15.0 VDC

MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -48 VDC WITH BIFILAR COIL

CUSTOMER DATA SHEET

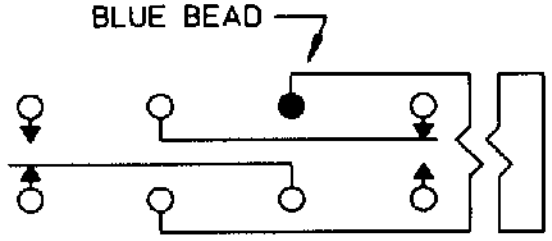

CONTACT RATING: LOW LEVEL TO 2A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/8/93 CK. 2/8/93

COMMUNICATIONS INSTRUMENTS, INC.

CUST. OPL

CUST. NO. M39016/22-009L

TYPE "HMB" RELAY

HMB1201K01L

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3631B101LL 936348-1 CPF0402B37K4E1 RH73H2A40MKTN U5254-000005-030PA SBCHE154R7K
1393431-1 175977-2 2-292161-3 3430B2F51RTDF MPT100C18RF SMW73R0JT ROX05SJ18R
1-794222-0 1903112-2 917696-1 1-962915-1 2005330-1 2834055-1 3-1393225-0 TE50BR39J 141991-2
1743455-2 1969656-1 2310537-1 2380312-2 650075-000 2377783-2 CRGCQ2010J3K3 SBCHE64R7K