


REV.	DATE	DESCRIPTION
NC	07/23/04	INITIAL RELEASE

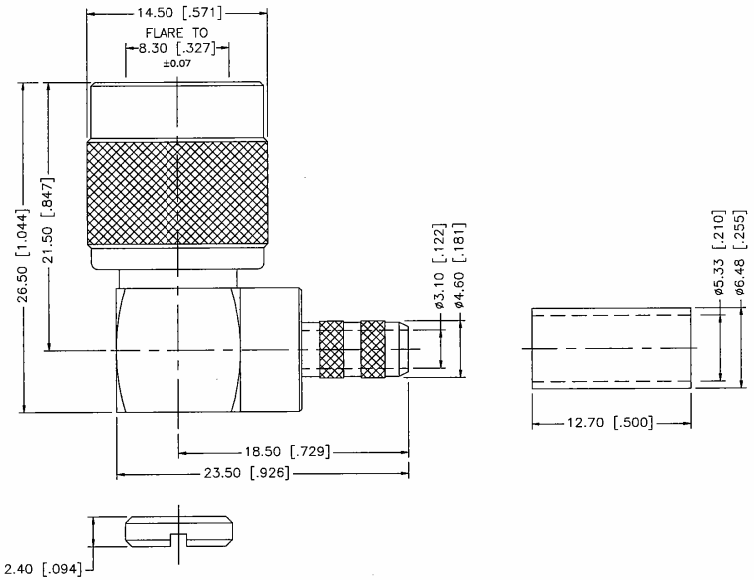



RECOMMENDED CABLE STRIPPING DIM'S
FOR RG-CABLE



RECOMMENDED CABLE STRIPPING DIM'S
FOR 6 GHz PERFORMANCE CABLE WITH FOIL BRAID.

ELECTRICAL:

A) IMPEDANCE: 50ohms
B) FREQUENCY RANGE: DC-6 GHz
C) VSWR (RETURN LOSS): 1.4 (15.5db), MAX.
D) DIELECTRIC WITHSTANDING VOLTAGE:
1500 VRMS, MIN.

NOTES:

1. CRIMPED FERRULE HEX SIZE .213"
2. SOLDER CENTER CONTACT.

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	NUT	BRASS	NICKEL	1
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/23/04
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122140RP.DWG

Amphenol Connex

PART DESCRIPTION
TNC REVERSE POLARITY R/A CRIMP PLUG
(FOR RG-58/U, 58C/U CABLE)

PART NO. 122140RP

DWG. NO.	REV.	SIZE	SCALE
122140RP.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

LD25S33E4GV00LF 68000-236HLF 69192-408HLF 70218-1116LF 54202-G0805CLF 68001-200HLF 86093968813H45V1LF 95157-140LF RJSBE5080C2 68002116HLF 86093967896755LF 86093968191755E3LF 863013A CD15S13E4RV09LF 86130202123355E1LF 91614-403ALF D15P13A6RV12LF LD15P33E4GV00LF 76384-316LF 86093488314745V1LF 54202-S08-07LF 65781-158 67996-204HLF 70430-164LF DAPO15S365TLF RJE061661210 68001-108HLF 70234-112LF DCMF37P DEM09P032N