

环保物料

TEL:0769-82001899

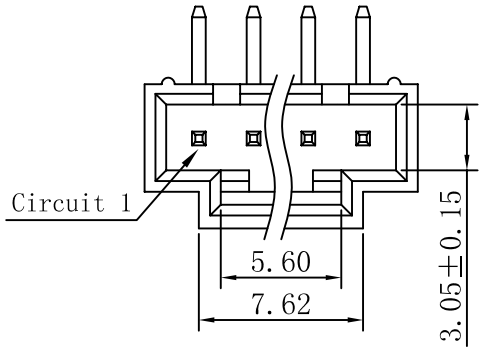





■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max


■ WAFER


- Poles : 02-20P
- Housing Material:Nylon66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked "▼" Must Be Recorded

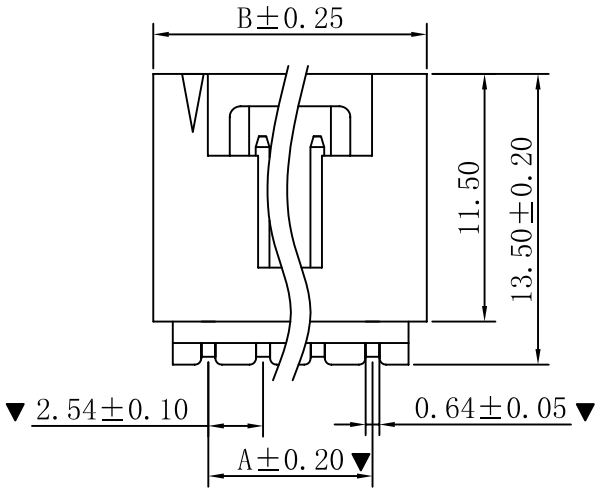

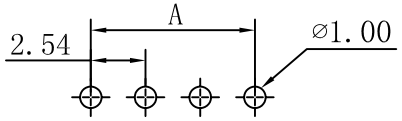


P.C.B LAYOUT

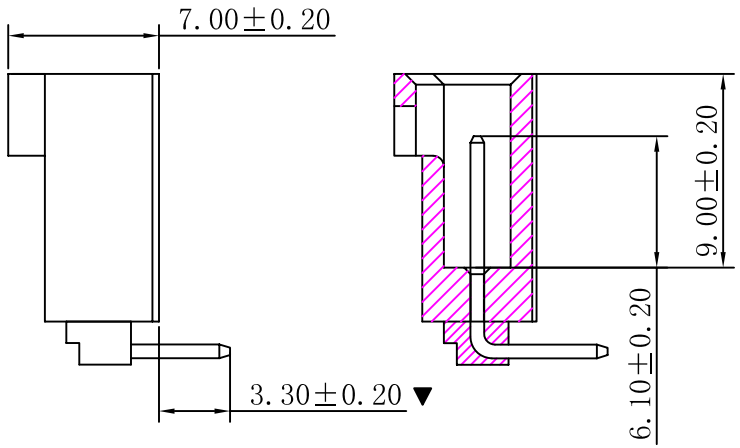



3 CIRCUIT



2 CIRCUIT

Part No.	Dimension(mm)	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X° .	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	2.54mm Crimp Style Connectors
PART. NO.	M2553R-XX-BK

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

XF-P00001 XF-P000167 M2016V-05P M2016V-08P F1001-T-16-25T-R F1003-ZV-26-25T-R M2545V-02P XF-P000143 XF-P000223 XF-P00092 PZ200V-11-05P XF-P000141 M1250VS-05P PZ200V-11-08P XF-P000159 XF-P000237 XF-P00065 M2010V-07P T2026PS-2 XF-2501L3003P3 XF-P00099 XF-P00115 XF-P00126 P1257-05P XF-12571503P3 M2010V-04P P1257-04P PZ254V-11-11P TT44080080-0820 XF-P00014