



MAPX	MODIFICATION	DATE

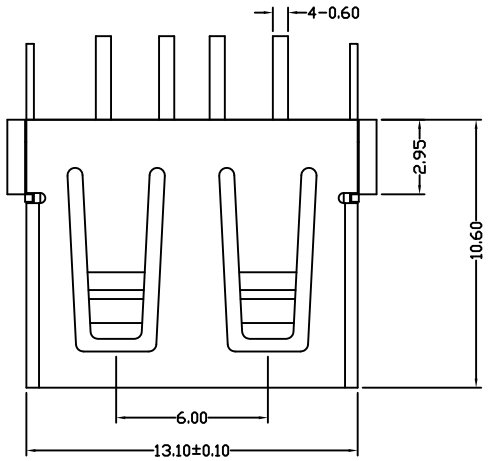

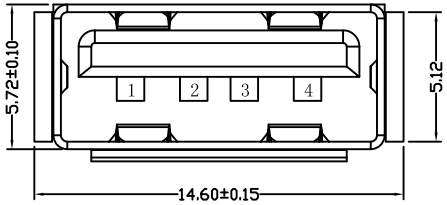

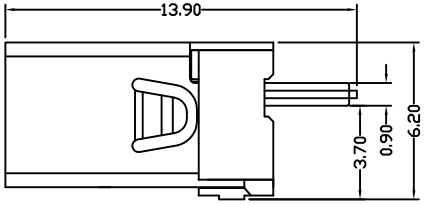

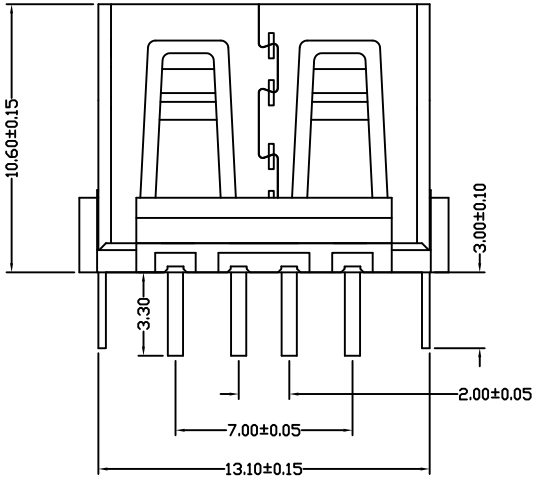

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;


Shell: Bronze, C2680R-H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: LCP Black

4.Environmental:

Operating Temperature: 0°C to +85°C.

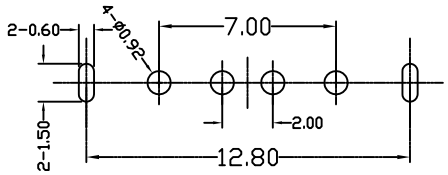

PCB HOLES

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	914-X22A1011Y10210
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.6苹果款180度铜壳PBT白偏蓝
日期 DATE	2011.09.01	核准 APPD		角法 VIEW	版本 VER A□

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-262A1021D10200 917-P81A202ES60201 920-A64A2091S101A3 906-752B1114D10200
912-112A2021S10100 918-468K2029Y50000 920-C62A2021S10103 905-761A2032S10200
908-351A1011D10100 910-151A2021D10100 916-151A1022Y10200 906-552A1012D10200
907-111A1022D10200 911-221A2021S10100 912-312A1012D10100 918-318K2023C40005
918-415K3028S40000 904-232A2031S10100 920-A62A2021S10108 920-C52A2021S10105
904-331B2032S10200 918-418K2022Y40011 919-162A1012D10400 904-232B2032S10100
920-154A2021Y10110 920-F52A2021S10105 907-312A1101Y10210 912-112A1011D10100
917-B88C201AH70201 920-A62A2021S10104