



MAPX	MODIFICATION	DATE

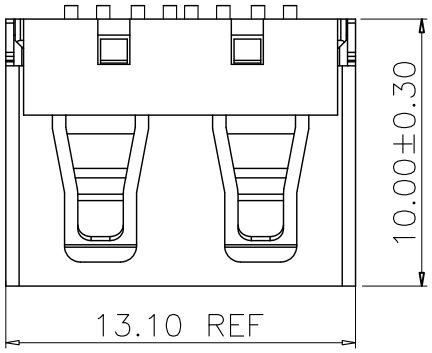

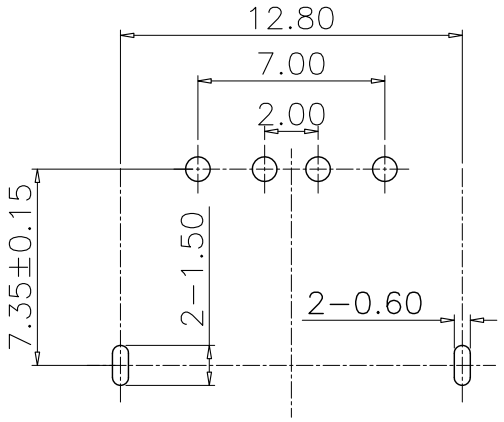

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

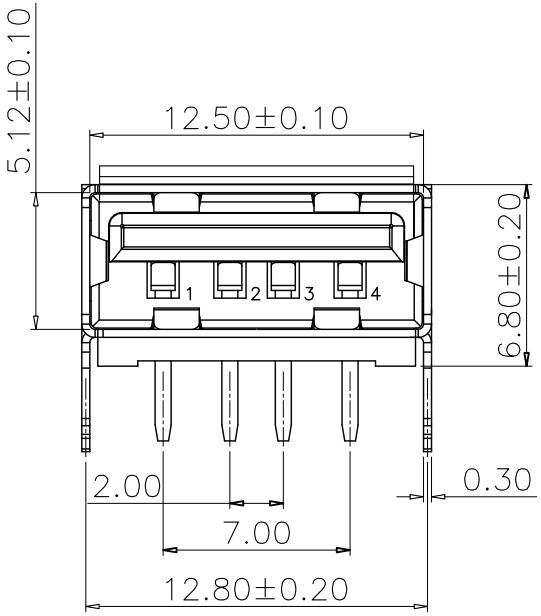

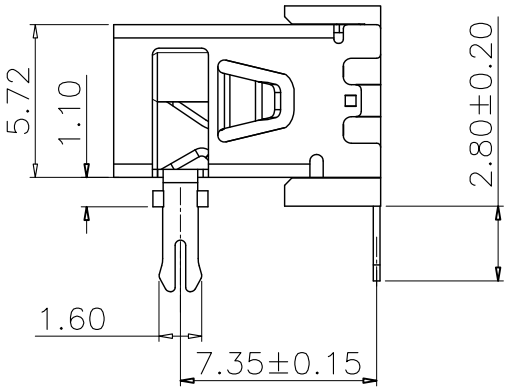

NOTES:
1. HOUSING: SEE NOTES,
   TERMINAL: SEE NOTES.
   SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
   CONTACT RESISTANCE: 30MΩ MAX
   DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
   INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
   INSERTION FORCE: 35N(3.57KGF) MAX
   EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
   DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
   5000 CYCLES MIN
   5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
   OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
   01:Selective Gold Flash
   02:Selective Gold 3U″
   03:Selective Gold 5U″
   04:Selective Gold 15U″
   05:Selective Gold 30U″

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-161A1023D10100
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0B款前两脚无边铁壳PBT黑胶DIP无耳朵
日期 DATE	2015.02.04	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-A64A2091S101A3 906-752B1114D10200 907-111A1022D10200 918-318K2023C40005
918-468K2029Y50000 920-154A2021Y10110 904-232A2031S10100 907-312A1101Y10210
912-112A2021S10100 918-418K2022Y40011 904-232B2032S10100 905-761A2032S10200
910-151A2021D10100 912-312A1012D10100 916-151A1022Y10200 917-B88C201AH70201
918-415K3028S40000 919-162A1012D10400 920-A62A2021S10108 920-C62A2021S10103
912-112A1011D10100 920-C52A2021S10105 906-262A1021D10200 906-552A1012D10200
920-F52A2021S10105 904-331B2032S10200 908-351A1011D10100 911-221A2021S10100
917-P81A202ES60201 920-A62A2021S10104