
BI2-M12-AP6X-H1141
Inductive Sensor






Technical data


Type	BI2-M12-AP6X-H1141
ID	46065
General data	
Rated switching distance	2 mm
Mounting conditions	Flush
Secured operating distance	≤ (0.81 × Sn) mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ±10 %
Hysteresis	3…15 %
Electrical data	
Operating voltage	10…30 VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 200 mA
No-load current	15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I_e	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, PNP
Insulation class	⧈
Switching frequency	2 kHz

Features

- M12 × 1 threaded barrel
- Chrome-plated brass
- DC 3-wire, 10…30 VDC
- NO contact, PNP output
- M12 x 1 male connector

Wiring diagram





Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

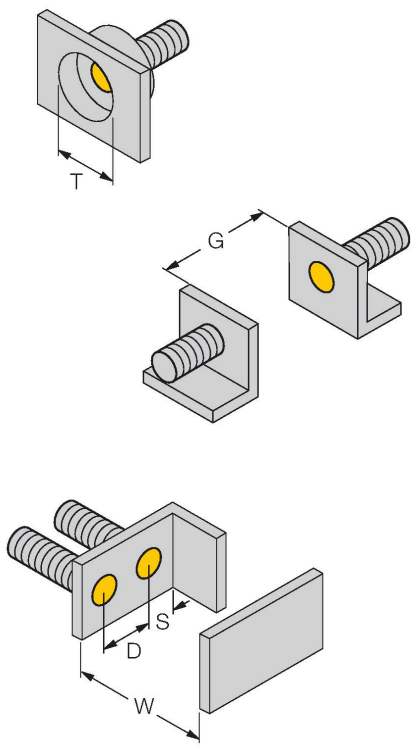
BI2-M12-AP6X-H1141 | 11/07/2023 13-28 | technical changes reserved

Technical data

Mechanical data	
Design	Threaded barrel, M12 x 1
Dimensions	52 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Plastic, PA12-GF30
Max. tightening torque of housing nut	10 Nm
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-25…+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions


Mounting instructions/Description





Distance D	24 mm
Distance W	3 x Sn
Distance T	3 x B
Distance S	1.5 x B
Distance G	6 x Sn
Diameter active area B	Ø 12 mm


BI2-M12-AP6X-H1141| 11/07/2023 13-28 | technical changes reserved

Accessories

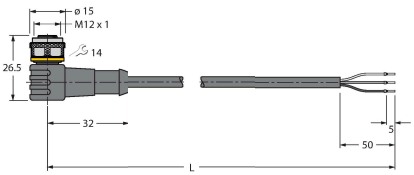
QM-12	6945101
	Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M16 × 1. Note: The switching distance of the proximity switches may change when using quick-mount brackets.

BST-12B	6947212
	Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6

MW-12	6945003
	Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

BSS-12	6901321
	Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

Wiring accessories

Dimension drawing	Type	ID	
	RKC4T-2/TEL	6625010	Connection cable, M12 female connector, straight, 3-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4T-2/TEL	6625022	Connection cable, M12 female connector, angled, 3-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

BI2-M12-AP6X-H1141 | 11/07/2023 13-28 | technical changes reserved

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TURCK:

BI30U-CP40-AP6X2 BIM-IKT-AP6X IM33-11EX-HI/24VDC NI 4U-Q8SE-AP6X NI100U-K90SR-VP4X2-H1141 NI12U-S18-AP6X BI 5-M18-Y1X-H1141 BI10-M30-AP6X-H1141 RKM 30-2M BI10U-Q14-AP6X2-V1131 C4-A40FX/024VDC NI10-G18-AZ3X-B1431 50MM 6936233 MFKS 3-1 NI10U-M12-AP6X NI10U-M12E-AP6X-H1141 NI30U-M30-AN6X-H1141 RKC8T-2/TXL FS 4.4-0.5/14.5/NPT TX1-Q20L60 BI4-M12-AN6X-H1141 Bi5-G18-Y1X BIM-UNT-AP6X-0.3-PSG3M Bi 8U-M18-AP6X C9-A41BX/024VADC NI 8U-M12-AN6X-H1141 RK 4T-4/S618 BC5-Q08-AP6X2-V1131 BIM-IKM-AP6X2-H1141/S34 W/KLI-3 IM31-22EX-I