
THERMALTRONICS

Check for latest datasheet

M75DT005 Datasheet

Technical Specifications

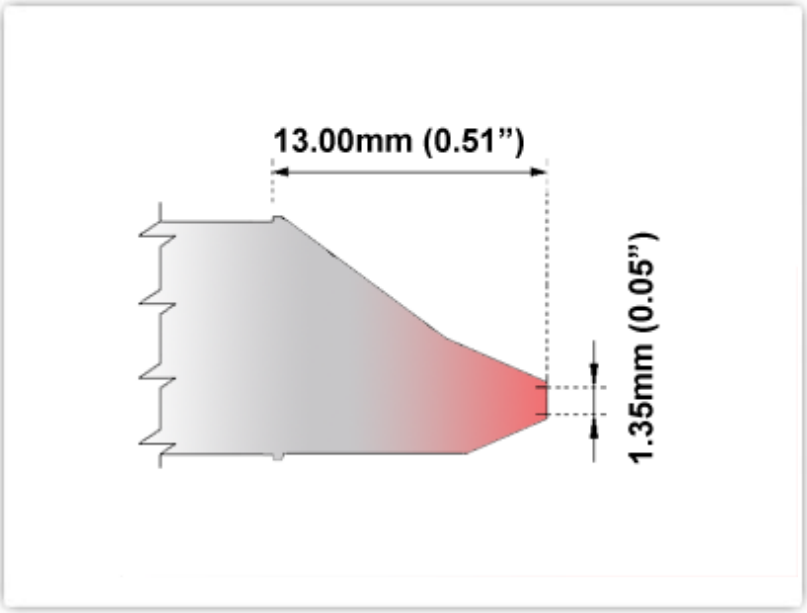

M75DT005

Desoldering Tip - Inner Diameter 1.35mm (0.05")


Tip Style:	Desoldering
Tip Width:	1.35mm (0.05")
Tip Length:	13.00mm (0.51")

750 Type Cartridge[1]:	350°C - 398°C
RoHS Compliant[2] / Lead Free:	YES
Equivalent to:	STDC-105
For Use With:	TMT-9000S-1, TMT-9000S-2, MX-500, MX-5000, MX-5200

Material Composition

Patented Color Band



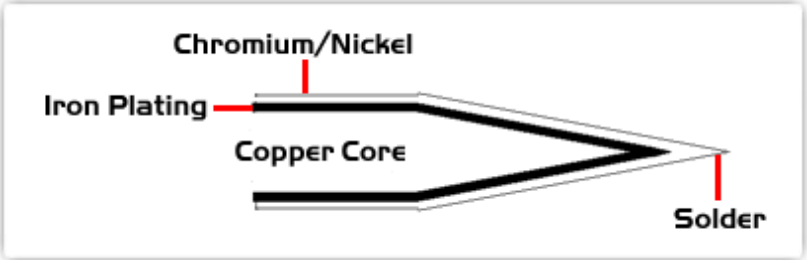

All components are RoHS compliant and Lead-Free.

1 Thermaltronics tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Thermaltronics offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

2 Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.

Copyright © 2010-2014 Thermaltronics All Rights Reserved

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

THERMALTRONICS:

M8CH178 M8CS152 K75DT006 M75DT004 M7B325 M7CP200 M8CB226 S75C001 SHP-K M7CP303 K75CH025 M8LR400 PM75C300 PM75SB276 K80CH050 M7CS151H M7CS155 M8CP200 M7SB275 SHP-1 TMT-2000S-SM K60DT006 S75CH010 S75CS010 M7CH178 M7CS152H PM75CH176 S75BV004 S75MF003 M8B325