




MAPX	MODIFICATION	DATE

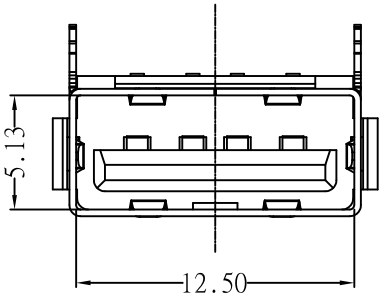




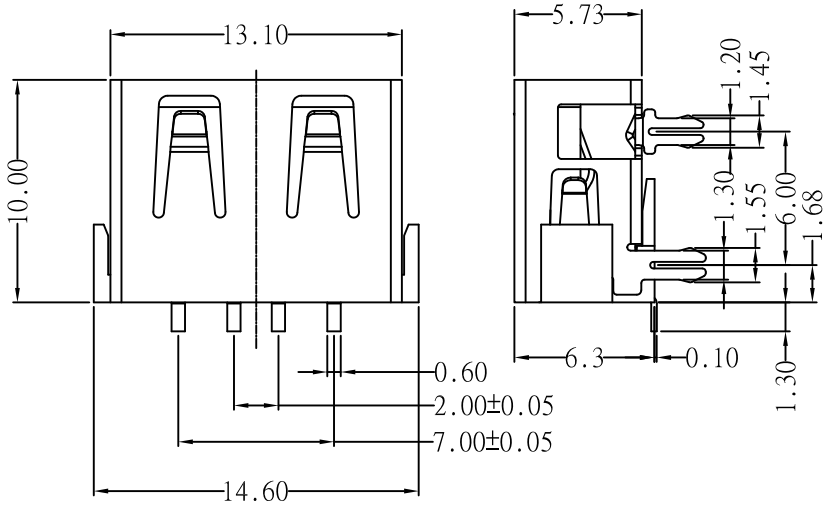

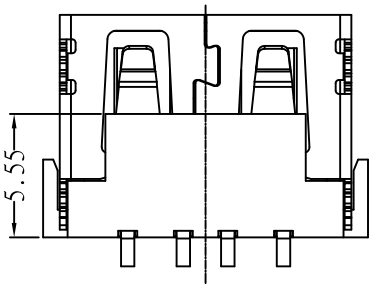



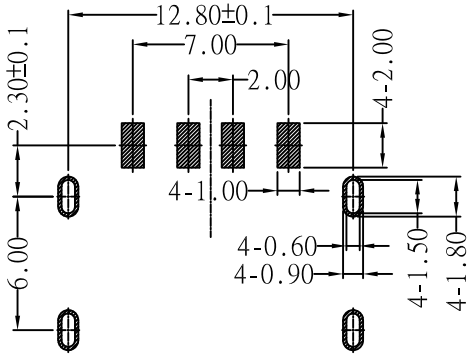

RECOMMENDED P.C.B LAYOUT

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ\Min.
Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
Durability:1500cycles.EXTRACTION
FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, SPCC,H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: PBT PA9T LCP Black White

4.Environmental:

Operating Temperature: 0°C to +85°C.

908-X X X A X XX X X X XX

- 01/02=1U 04=3U 07=15U 08=30U
- 1=氰铜 2=磷铜
- D=90度 Y=180度 S=贴板
- 1=A款6.3 2=A款6.8,
- 01=白色 02=黑色
- 1=PBT 2=LCP 3=PA9T
- A=正向
- 1=铁壳24H 2=铜壳24H
- 5=有边 6=无边 7=有边有缺口
- 1=前两脚 2=后两脚 3=四脚

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	908-362A2021S10110
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF10.0A款四脚无边6.3铜壳LCP黑胶6.3SMT
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

910-151A2021D10100 918-318K2023C40005 920-154A2021Y10110 904-232B2032S10100
907-111A1022D10200 916-151A1022Y10200 917-P81A202ES60201 918-468K2029Y50000
908-351A1011D10100 912-112A1011D10100 912-112A2021S10100 920-A62A2021S10108
920-A64A2091S101A3 906-552A1012D10200 920-A62A2021S10104 920-C52A2021S10105
920-F52A2021S10105 905-761A2032S10200 911-221A2021S10100 919-162A1012D10400
904-331B2032S10200 917-B88C201AH70201 918-418K2022Y40011 907-312A1101Y10210
912-312A1012D10100 920-C62A2021S10103 904-232A2031S10100 906-752B1114D10200
918-415K3028S40000 906-262A1021D10200