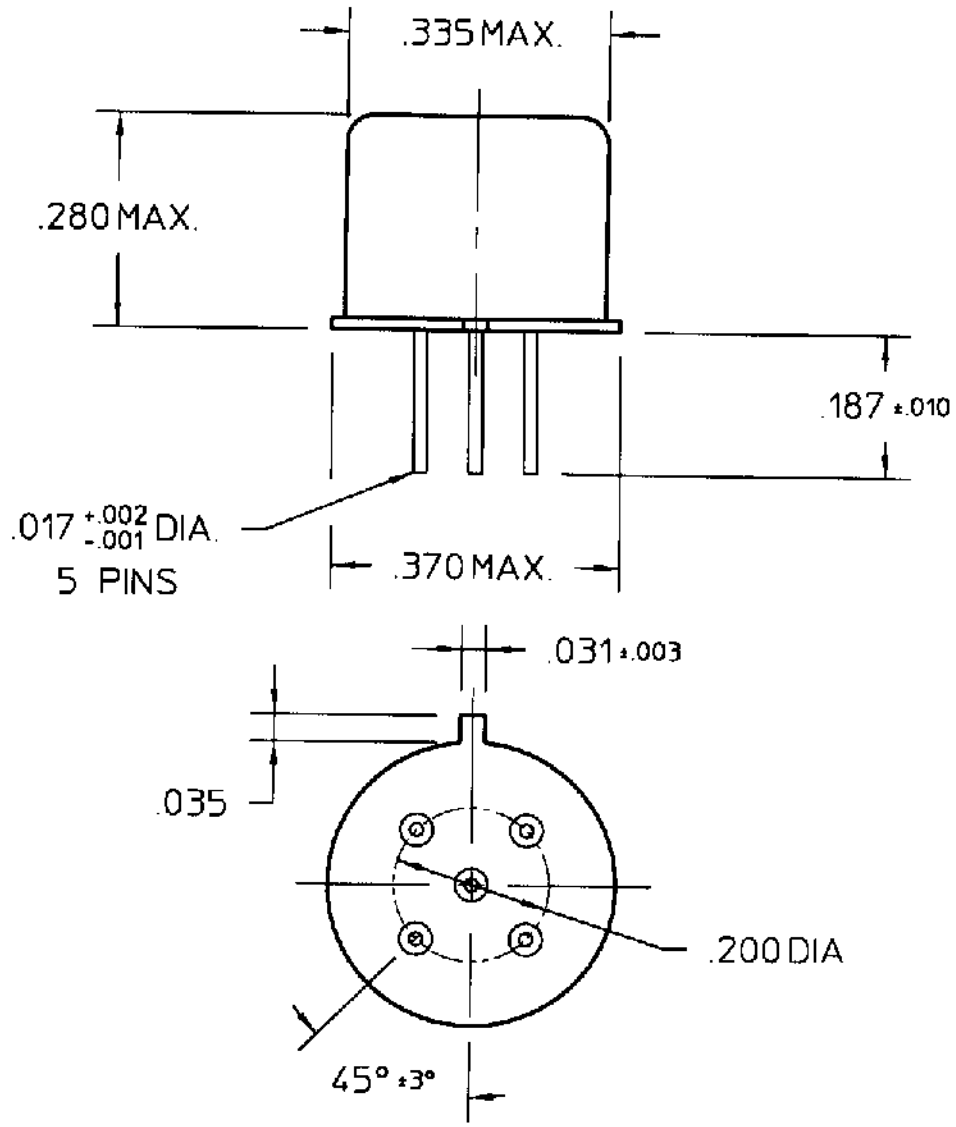


COIL: @ 25°C

RESISTANCE 2000 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.2 VDC

MUST RELEASE 8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/5/96 CK. Jerry 12/5/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. OPL
CUST. NO. M39016/23-024M

TYPE J1MAD RELAY

J1MAPD-26XM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2377783-2 TE50BR39J 1743455-2 650075-000 141991-2 2310537-1 917696-1 CRGCQ2010J3K3 MPT100C18RF ROX05SJ18R SMW73R0JT 2834055-1 1903112-2 1969656-1 RH73H2A40MKTN CPF0402B37K4E1 2005330-1 2380312-2 1393431-1 175977-2 3-1393225-0 3631B101LL 936348-1 U5254-000005-030PA SBCHE154R7K SBCHE64R7K 1-794222-0 1-962915-1 2-292161-3 3430B2F51RTDF