

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014
© COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P18957	9-1-05	TY	RDR
	A	REVISED PER E.O. P19429	12-11-06	TY	RDR
	B	REVISED PER E.O. P20013	9-26-08	TY	DM
	B1	REVISED PER ECO-14-005851	4-17-14	JA	DM

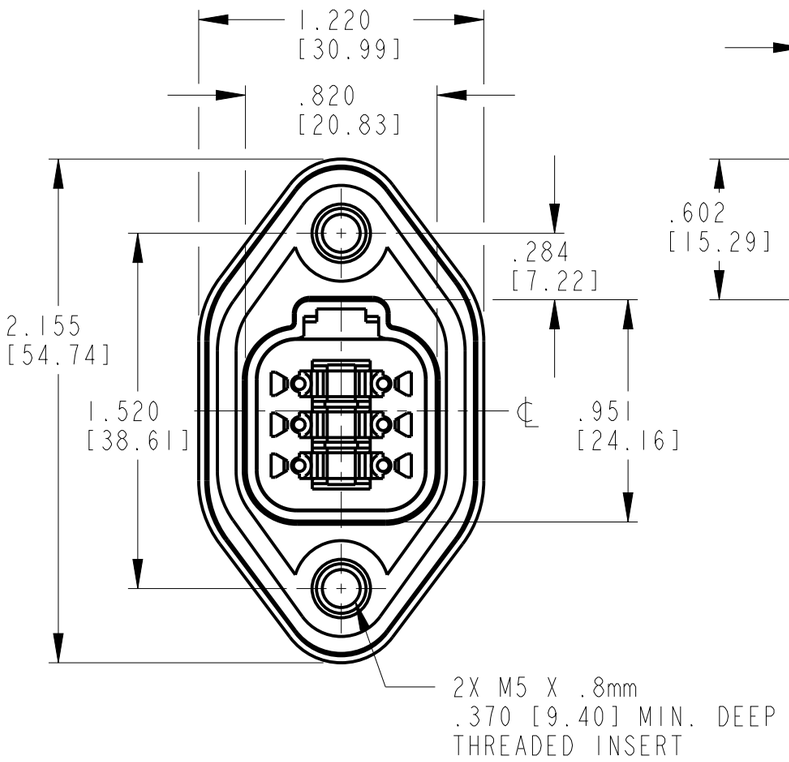

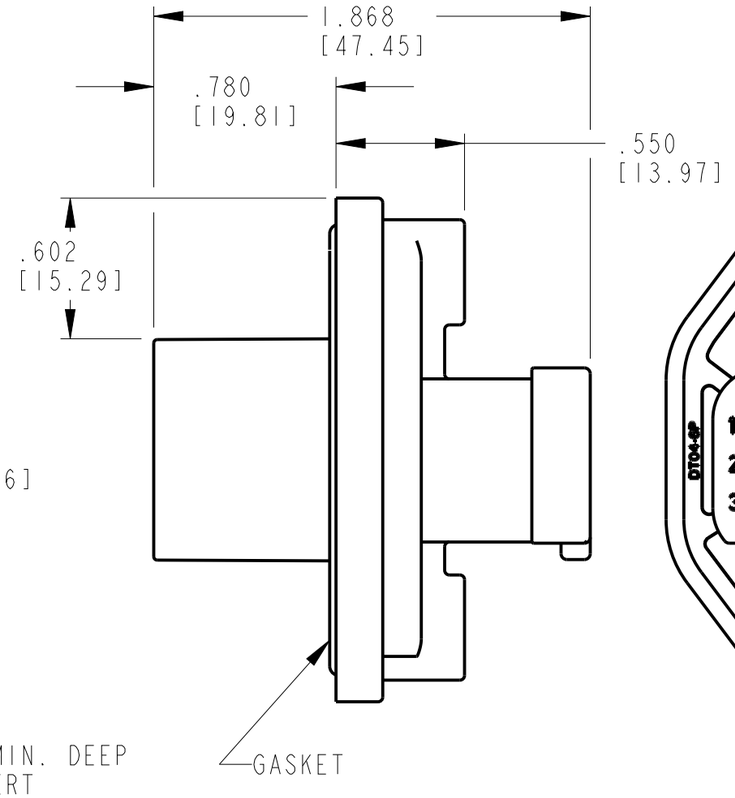

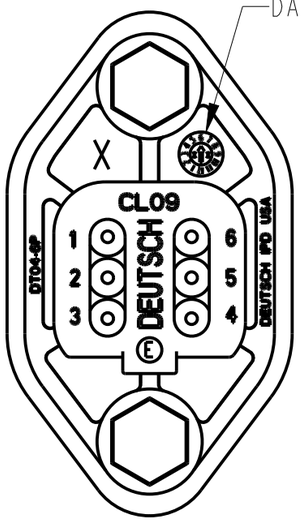

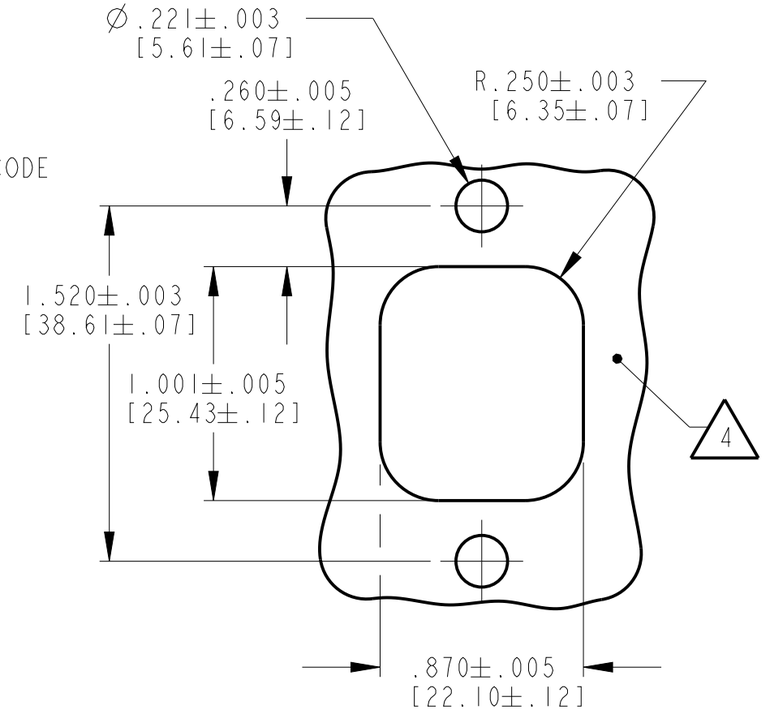

RECOMMENDED MOUNTING DETAIL

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm^2] REF ONLY ⚠1
16	.053 [1.34]	.120 [3.04]	14-20 AWG [2.0-0.5]

5. RECOMMENDED TORQUE VALUE FOR SCREW: 19±2 IN-LB [2.15±.23 N-m].

⚠4 INTERNAL SEALING SURFACE FINISH TO BE $\frac{32}{\nabla}$ OR BETTER ⌭ .005 [.13] .

3. CONNECTOR MATERIAL IS BLACK PLASTIC; SEAL AND GASKET ARE RUBBER; INSERT IS STAINLESS STEEL.

2. THIS RECEPTACLE MATES WITH DT06-6S-**** PLUG AND UTILIZES W6P WEDGE LOCK.
(**** = ALL MODIFICATIONS) CONSULT FACTORY FOR MODIFICATIONS.

⚠1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERSTICS, SEE ENVELOPE DRAWINGS 0425-015-0000 AND 0425-017-0000.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [.64]
4 PLC ±
ANGLES ±0°30'0"

MATERIAL

FINISH

DWN 07APR2014 JAIME C. APOSTOL
CHK 17APR2014 RUSSELL MESSENGE
APVD 17APR2014 DAVID MEYER
PRODUCT SPEC
APPLICATION SPEC
WEIGHT 25.75g
CUSTOMER DRAWING

TE Connectivity

NAME 6 WAY RECEPTACLE WITH REDUCED WIRE SEAL DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT04-6P-CL09	-

SCALE 1:1 SHEET 1 OF 1 REV B1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

TE50BR39J 1-962915-1 1743455-2 2-292161-3 2377783-2 2380312-2 2005330-1 2310537-1 650075-000 SMW73R0JT 1969656-1 3-1393225-0 3631B101LL CPF0402B37K4E1 RH73H2A40MKTN U5254-000005-030PA SBCHE154R7K MPT100C18RF 1-794222-0 1393431-1 1903112-2 3430B2F51RTDF 917696-1 CRGCQ2010J3K3 2834055-1 141991-2 175977-2 936348-1 ROX05SJ18R SBCHE64R7K