

DESCRIPTION: M5 FEMALE - FRONT PANEL MOUNT - SOLDER CUP - 3 POSITION

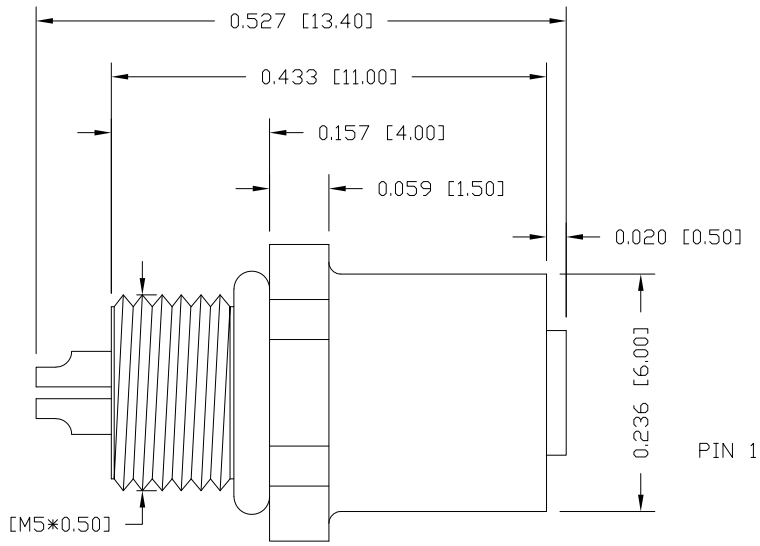

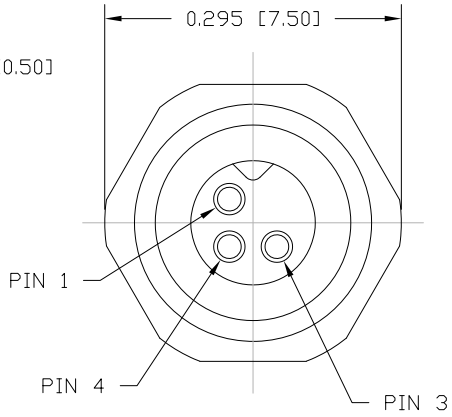


NOTE:


MATERIAL	
HOUSING:	PBT UL94V-0, BLACK
CONTACT:	BRASS
NUT:	BRASS
SHELL:	BRASS
O-RING:	NBR, BLACK
FINISH	
CONTACT:	GOLD PLATED OVER 50u" NICKEL
NUT:	NICKEL PLATED
SHELL:	NICKEL PLATED
ELECTRICAL	
RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.
WATER PROOF:	IP67
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C TO +85°C
WIRE GAUGE:	28 AWG MAX RECOMMENDED

851-003-203R00Y


1 = GOLD FLASH
4 = 10u" GOLD

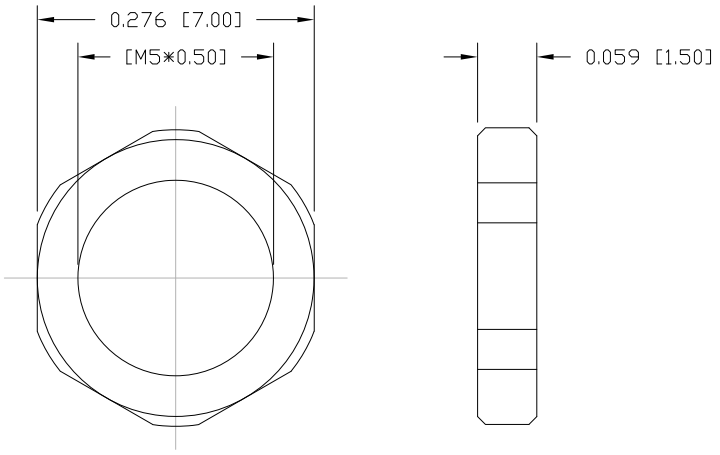

NUT



RECOMMEND PANEL CUT-OUT
MAX. PANEL THICKNESS: 0.075" [2.00]

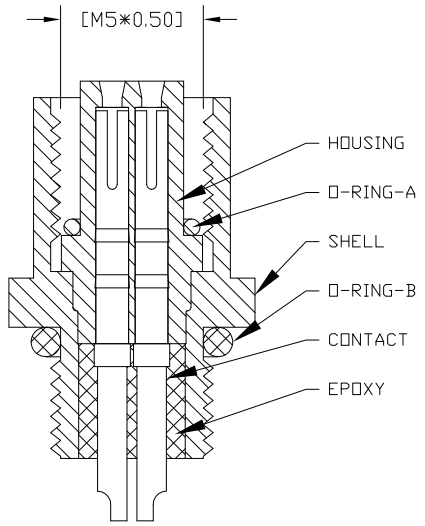

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:		SCALE:	SHEET	OF	REV
M. SIGMON	03-03-16	NorComp	NTS	1	1	5
			DWG NO.	851-003-203R00Y		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

NorComp:

180-044-173L020 852-002-113R004 8P1P003200GRB01 T54-B05-FFFR001 171-037-213R001 8P1P005210GRBR1 8P1P01417BGL521 HDF-R44-213L011 CCA-000-M03R215 Y54-A04-MFFR001 858-R03-103RSS4 CDFS17W2103L411 HDF-R15-113L461 T58-D04-MMMR001 8P1P00217BGL521 S58-A04-MMR001 180-026-203L031 680S3W3103L201 820B007-203RF01 970-025-030R121 CCA-015-M.5R152 SDF-V09-213L011 SFP67SS25 172-025-113R021 181-044-113R531 178-015-313R491 822B006-273L501 GCHDLPF15M15F SDF-R37-113L461 SFP6715