THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST ,2006.
© COPYRIGHT 2006 By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	PER ECO-14-012369	15NOV2014	RZ	MY

NOTES:

1. SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115
2. TRAY PACKAGED
3. SILVER PLATING
4. NICKEL PLATING
5. THIS ITEM MUST BE WHITE
6. MARKING: 2W-50 OHM
7. ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:	DC – 1 GHz
NOMINAL IMPEDANCE:	50 Ohm
INSULATION RESISTANCE:	5000 MOhm
WORKING VOLTAGE:	500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE:	1500 Volts RMS Max
CONTACT RESISTANCE:	
CENTRE CONTACT:	1.50 mOhm Max
OUTER CONTACT:	0.20 mOhm Max
VSWR @ 0.3GHz:	1.7 MAX
INSERTION LOSS 0.5db:	


8. MECHANICAL CHARATERISTICS

COUPLING RETENTION FORCE:	445N
CABLE RETENETION FORCE:	N/A
DURABILITY:	500 Cycles Min

9. ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:	-40°C to +70°C

10. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
11. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

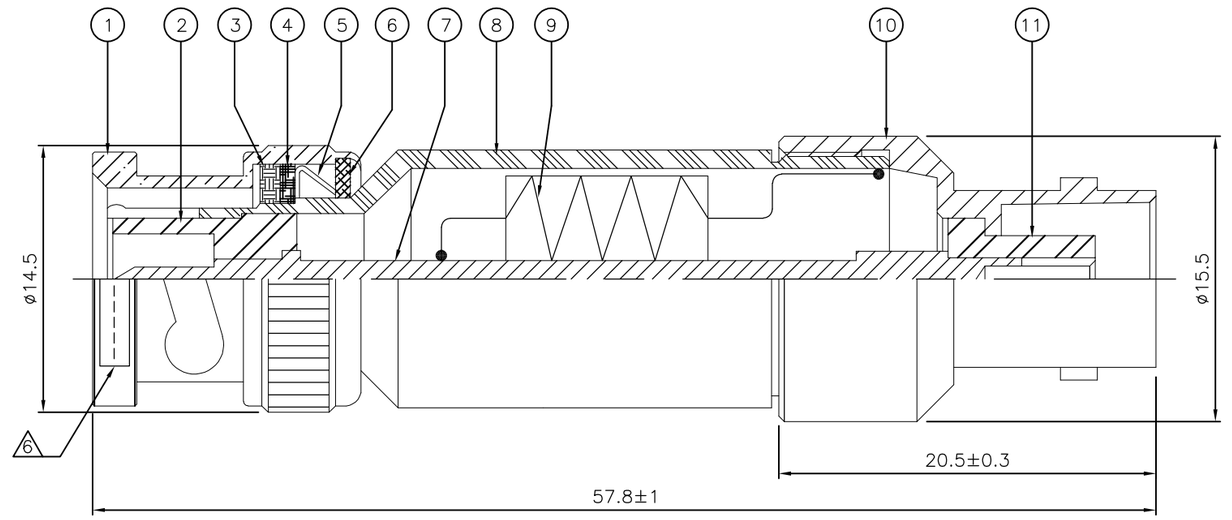

		1	1	PTFE	INSULATION	11
		1	1	BRASS (3)	BODY 2	10
		1	1	2W-50 OHM	RESISTOR	9
		1	1	BRASS (3)	BODY 1	8
		1	1	BRASS (3)	CONTACT	7
		1	1	BRASS (3)	WASHER	6
		1	1	SPRING STEEL (4)	SPRING	5
		1	1	BRASS (4)	RETAINING RING	4
		1	1	SILICONE RUBBER (5)	GASKET	3
		1	1	PTFE	INSULATION	2
		1	1	BRASS (3)	SHELL	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM
		(2)	(1)			
QUANTITY PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.2
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: –

DWN	J.SANDWELL	04AUG06
CHK	S.PARLOW	04AUG06
APVD	F.WHEELER-KING	04AUG06
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

CUSTOMER DRAWING

TE Connectivity

NAME: BNC THROUGH TERMINATION P-J 50 OHM – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1478207	–

SCALE	SHEET	REV
NTS	1 OF 1	D

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 2380312-2 1393431-1 936348-1 MPT100C18RF 1-962915-1 2005330-1 3-1393225-0 CPF0402B37K4E1 ROX05SJ18R 141991-2 SBCHE154R7K 1903112-2 2377783-2 917696-1 RH73H2A40MKTN TE50BR39J 1-794222-0 1743455-2 SMW73R0JT 2-292161-3 2310537-1 2834055-1 3430B2F51RTDF 3631B101LL U5254-000005-030PA 1969656-1 650075-000 CRGCQ2010J3K3 SBCHE64R7K