



MAPX	MODIFICATION	DATE

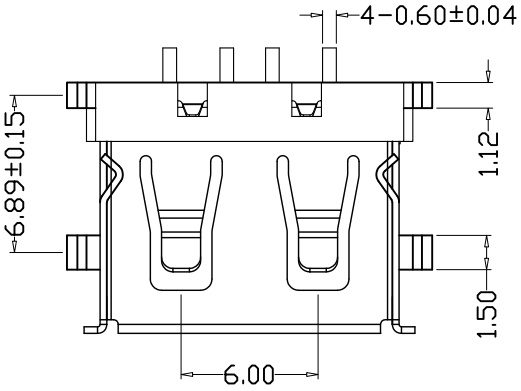


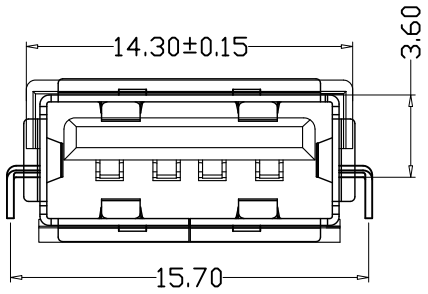

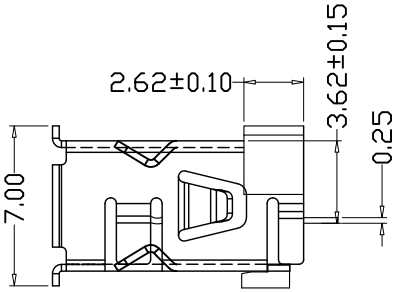

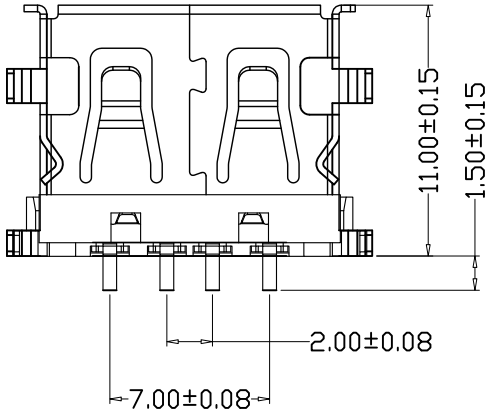

NOTE:
1. Material:
   Housing: Thermoplastics,UL94V-0(ROHS,HF)
   Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm
   Shell: COPPER ALLOY T=0.30mm
2. FINISH:
   Contact: 15u″ Gold Plated on Contact Area,
   80u″ Min.Tin Plated on Solder Area
   50u″ Min.Nickel Underplating Over All.
   Shell: 50u″ Min.Nickel Underplating Over All.
3. Specification:
   3.1: Rating:
   Rated voltage 500V AC/DC. Rated current: 2 A Max.
   3.2: Electrical:
   Insulation Resistance(EIA-364-21):
   1000MΩ Min. at 500V/DC for 1Minute.
   Contact Resistance(EIA-364-23):
   30 mΩ Max. at 20mV Max, 50mA
   Dielectric Withstanding Voltage(EIA-364-20):
   No discharge, flashover or breakdown at 500V/AC 1Minute
4. Plug extraction force shall be between 1.0kgf and 2.00kgf
5. Contact finish:
   01:Selective Gold Flash
   02:Selective Gold 3U″
   03:Selective Gold 5U″
   04:Selective Gold 15U″
   05:Selective Gold 30U″

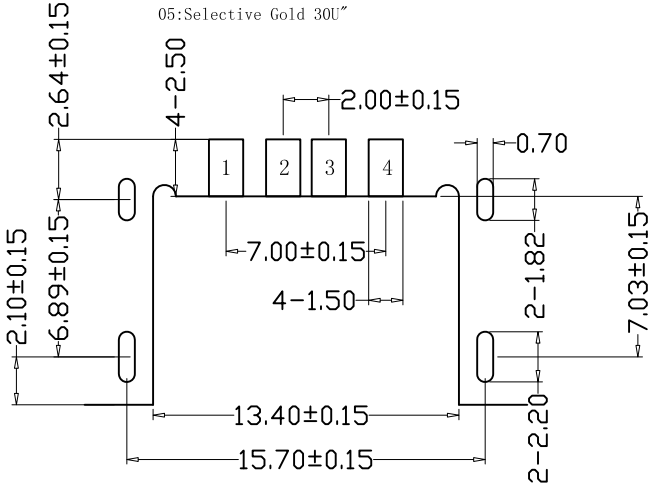

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES:±0.05

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	905-752A203S10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF11.0沉板四脚有边铜壳LCP本色
日期 DATE	2014.11.1	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

912-112A2021S10100 918-318K2023C40005 918-415K3028S40000 906-552A1012D10200
920-C62A2021S10103 920-F52A2021S10105 910-151A2021D10100 911-221A2021S10100
917-B88C201AH70201 918-418K2022Y40011 920-154A2021Y10110 920-A64A2091S101A3
920-C52A2021S10105 907-111A1022D10200 916-151A1022Y10200 918-468K2029Y50000
905-761A2032S10200 912-312A1012D10100 917-P81A202ES60201 904-232B2032S10100
907-312A1101Y10210 908-351A1011D10100 912-112A1011D10100 920-A62A2021S10104
904-232A2031S10100 904-331B2032S10200 906-262A1021D10200 906-752B1114D10200
919-162A1012D10400 920-A62A2021S10108