


由 Autodesk 教育版产品制作

RoHS


MAPX	MODIFICATION	DRW	DATE







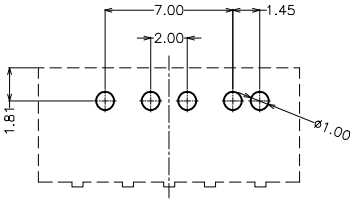


RECOMMAND P.C.B LAYOUT
TOLERANCE:±0.10









NOTES:
1. MATERIAL SPECIFCATION:
   1) INSULATION MATERIAL:THERMOPLASTIC HALGENFREE.
   2) SHELL:COPPER ALLOY T:0.30mm
      PLATING: NICKEL
   3) TERMINAL: COPPER ALLOY T:0.25mm
      PLATING: GOLD/TIN PLATED;
2. ELECTRICAL CHARACTERISTIC:
   1) INSULATION RESISTANCE: 1000MΩ MIN;
   2) CONTACT RESISTANCE: 30mΩ MAX;
   3) WITHSTANDING VOLTAGE: 500V AC;
3. MECHANICAL CHARACTERISTICS:
   1) INSERTION FORCE:3.57Kgf Max;
   2) EXTRACTION FORCE:1.02Kgf Min;

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	ZYB	制图料号 PRODUCT PART NO.	916-451A2026Y10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF10.0间体5PIN/180度无脚无边弹铁壳LCP黑胶9.5
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER: A0

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-262A1021D10200 907-111A1022D10200 917-P81A202ES60201 920-A62A2021S10104
911-221A2021S10100 916-151A1022Y10200 917-B88C201AH70201 920-154A2021Y10110
908-351A1011D10100 910-151A2021D10100 912-312A1012D10100 920-A64A2091S101A3
906-552A1012D10200 906-752B1114D10200 918-318K2023C40005 907-312A1101Y10210
920-A62A2021S10108 920-C62A2021S10103 904-232B2032S10100 904-331B2032S10200
912-112A2021S10100 918-418K2022Y40011 918-468K2029Y50000 920-C52A2021S10105
920-F52A2021S10105 912-112A1011D10100 918-415K3028S40000 919-162A1012D10400
904-232A2031S10100 905-761A2032S10200