www.lemo.com

FFS.00.250.CTAE24

SUMMARY



Image is for illustrative purpose only

Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

Request a quote

Catalog

Series	00
Termination type	Male solder
IP rating	50
Cable Ø	0.00 - 2.30 mm
Status	active
Alternative part	
Matching parts	ERA.00.250.CTL

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFS*: Straight plug with cable crimping
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	
Weight	3.22 g

Performance

Configuration	00.250 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	4 Amps

Specifications

Contact Type: Coaxial 50 Ohm (Solder)
Contact Dia.: 0.7 mm (0.028in)
Bucket Dia.: 0.6 mm (0.024in)
Test voltage: 2.1 kV (rms)

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


R (max): 6.1 mOhm
Vtest: 2100 V (AC), 3000 V (DC)
▫
Impedance: 50 Ohm
VSWR: 1.09 + 0.11 * f/GHz
Cable type: RG 196 A/U

Others

Endurance (Shell): 5000 mating cycles
F ret (min): 100 N
Salt Spray Corrosion: >1000 hr
IP Rating: 50

DRAWINGS

Draws

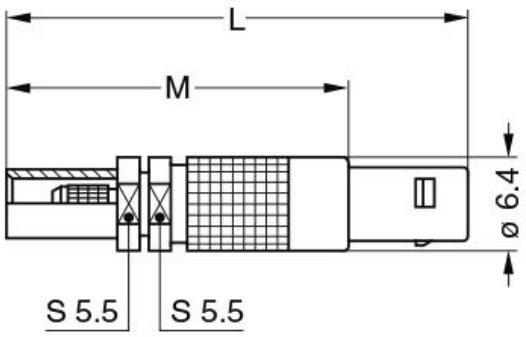





Dimensions

	A	L	M
mm.	6.4	31	23
in.	0,25	1,22	0,91

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPE.99.123.1K

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Die Tool: DPN.99.123.1K
Spanner wrench: DCP.99.055.TC

Cables

178 190	PTFE	Brown	
196 270	PTFE	White	
CCX.50.030.083.180B		White	
CCX.50.RG1.78BU18M	FEP	Brown	
CCX.50.RG1.78BU18M	PTFE	Brown	
CCX.50.RG1.96AU19B	PTFE	White	
CCX.50.RG1.96AU20B	PFA	White	

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.