



ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

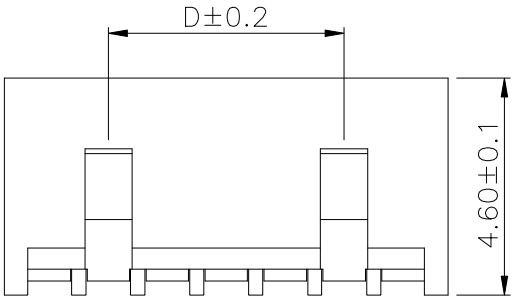

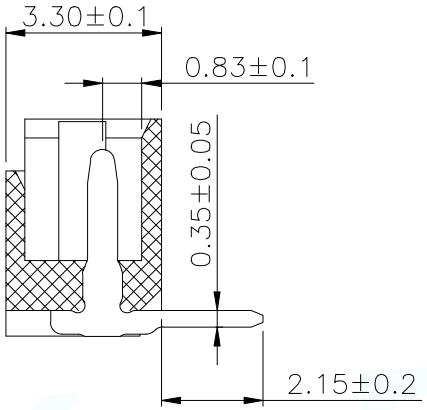

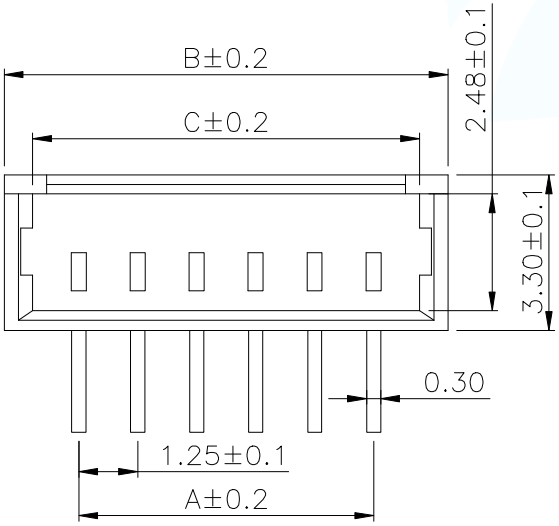

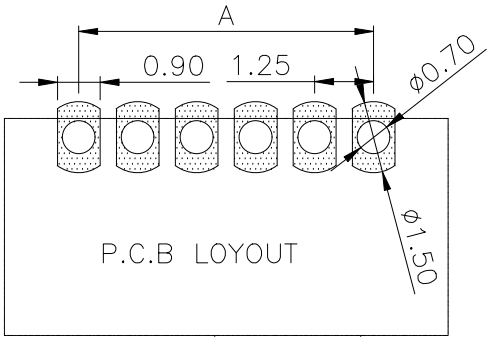

Part No	Pin	A	B	C	D
WAFER-MX1.25-2PWZ	2	1.25	4.40	3.20	
WAFER-MX1.25-3PWZ	3	2.50	5.65	4.45	
WAFER-MX1.25-4PWZ	4	3.75	6.90	5.70	2.50
WAFER-MX1.25-5PWZ	5	5.00	8.15	6.95	3.75
WAFER-MX1.25-6PWZ	6	6.25	9.40	8.20	5.00
WAFER-MX1.25-7PWZ	7	7.50	10.65	9.45	6.25
WAFER-MX1.25-8PWZ	8	8.75	11.90	10.70	7.50
WAFER-MX1.25-9PWZ	9	10.00	13.15	11.95	8.75
WAFER-MX1.25-10PWZ	10	11.25	14.40	13.20	10.00
WAFER-MX1.25-11PWZ	11	12.50	15.65	14.45	11.25
WAFER-MX1.25-12PWZ	12	13.75	16.90	15.70	12.50
WAFER-MX1.25-13PWZ	13	15.00	18.15	16.95	13.75
WAFER-MX1.25-14PWZ	14	16.25	19.40	18.20	15.00
WAFER-MX1.25-15PWZ	15	17.50	20.65	19.45	16.25
WAFER-MX1.25-16PWZ	16	18.75	21.90	20.70	17.50

NOTES:
1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass

SPECIFICATIONS:
1.Spacing: 1.25
2.Voltage Rating: 125V AC DC
3.Current Rating: 1A AC DC
4.Insulation Resistance: 100MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 500V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: WAFER 1.25 弯针	
		PAR	WAFER-MX1.25-NPWZ
DECIMALS: / ANGLES:		DWN	
X.:±0.2 / X°.:±5°		CHKD	
.X:±0.1 / X.X°:±3°		APVD	
.XX:±0.05 / X.XX°:±1°	CUSTOMER COPY	SCALE1:1 / UNIT:MM / SIZE:A4 / SHEET:1F1 / REV:A	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5AX-24PWCR-H20 PHB2.0-02-20PZZ WAFER-MX1.25B-8PWB WAFER-PH2.0-3PWB WAFER-WBM4.2-16PJK-GB DC-031A-A100 FPC-0.5FX-14PWCR-H20 FPC-0.5HF-10PWBR-H20 WAFER-GH1.25-6PLB FPC-1.0HF-4PWAR-H20 HDMI-212L SMA-KWE-323C-H13X23-LW WAFER-PH2.0-8PLB FPC-0.5AS-5PWCR-H20 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-20PWBH15 RJ45-005-014-11 TYPEC-304YDSW-ACP16 WAFER-PH2.0-11PZZ FPC-0.5FX-4PWBH15 FPC-1.0AX-14PWCR-H25 WAFER-PH2.0-2PJK WAFER-XH2.54-4PWZ-H62 FPC-1.0AX-4PWCR-H25 FPC-0.5AL-6PB WAFER-VH3.96-4PLB FPC-0.5FX-16PWCR-H20 FPC-0.5FX-4PWCR-H20 MU-103-ARW64 WAFER-PH2.0-6PWB