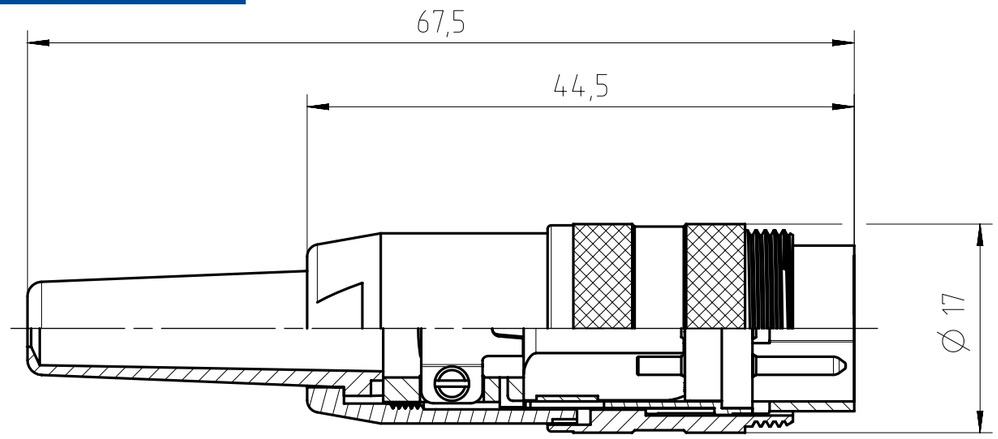
Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design











INDUSTRIAL@AMPHENOL
TRUSTED GLOBALLY



Number of contacts	Standard	3	4	5	5	6	7	7	8	12	14	14	19
Contact arrangement	IEC 61076-2-106	03-a	04-a	05-a	05-b	06-a	07-a	07-b	08-a	12-a	14-a	14-b	19-a
Contact arrangement	IEC 60130-9[1]	yes		no	yes		no	yes		no			
Rated voltage[2]	IEC 60664-1	300 V (100 V)		300 V (63 V)	100 V (32 V)	300 V (63 V)		100 V (32 V)		150 V (32 V)		60 V (32 V)	
Rated voltage	UL 1977	250V								60V			
Rated impulse withstand voltage[2]	IEC 60664-1	1500 V (1500 V)			1200 V (800 V)	1500 V (1500 V)		1200 V (800 V)					
Pollution degree[2]	IEC 60664-1	1 (2)											
Installation category	IEC 60664-1	I											
Insulation group	IEC 60664-1	II, 400 ≤ CTI < 600											
Current rating	IEC 60512-5-2 UL 1977	10A/+40°C			7A/+40°C					3A/+40°C			
Insulation resistance	IEC 60512-3-1	>10^{10} Ohm[3]											
Contact resistance	IEC 60512-2-1	<5mOhm											
Climatic category	IEC 60668-1	40 / 100 / 56											
Temperatur range	IEC 60668-1	-40°C...+100°C / -40°F...+212°F											
IP degree	IEC 60529	IP 40											
Insertion and withdrawal force	IEC 60512-13-2	25N	30N	35N	35N	50N	55N	55N	60N	50N	50N	50N	60N
mechanical operation	IEC 60512-9-1	Silver ≥500 mating cycles / Gold ≥1000 mating cycles											
housing material		brass and / or zinc die cast, nickel plated or thermoplast											
dielectric material		thermoplastic											
contacts		silver or gold plated											
termination technique		solder											
wire gauge		≤0,5mm² / 20 AWG								≤0,35mm² / 22 AWG			
flamability		UL 94 V0											
locking system		metal screw coupling; tightening torque 0,7 - 1,5 Nm											

[1] Edition 2000-05
[2] values in brackets are according to DIN EN 61076-2-106
[3] under operating conditions >10^{8} Ohm

Do not connect or disconnect under load. Metal housing parts shall be securely incoporated to protected ground.
Remark for gold plated contacts:
In order to avoid brittle inter-metallic connections, gold plated terminals have to be tin-plated in the solder area.
All technical data have been measured in a laboratory environment and can be different during pratical usage of the product. Any product information is for descriptive usage only and not legally binding; particulary the information does not constitute or provide any legal guaranties ("Beschaffenheitsgarantie" or " Haltbarkeitsgarantie").

	Contact arrangement View on mating side	Number of contacts (Contact arrangement acc. DIN EN 61076-2-106)		Part number
		19 (19-a)	Ag	T 3690 001 U
			Au	T 3690 018 U
		14 (14-b)	Ag	T 3670 001 U
			Au	T 3670 018 U
		14 (14-a)	Ag	T 3650 001 U
			Au	T 3650 000 U
		12 (12-a)	Ag	T 3635 001 U
			Au	T 3635 000 U
		8 (08-a)	Ag	T 3504 001 U
			Au	T 3504 018 U
		7 (07-b)	Ag	T 3484 001 U
			Au	T 3484 018 U
		7 (07-a)	Ag	T 3475 001 U
			Au	T 3475 018 U
		6 (6-a)	Ag	T 3400 001 U
			Au	T 3400 018 U
		5 (05-b)	Ag	T 3356 010 U
			Au	T 3356 018 U
		5 (05-a)	Ag	T 3360 001 U
			Au	T 3360 018 U
		4 (04-a)	Ag	T 3300 001 U
			Au	T 3300 018 U
		3 (03-a)	Ag	T 3260 001 U
			Au	T 3260 018 U
		2 (Pin 1+3)	Ag	T 3200 001 U
			Au	T 3200 018 U

Gewicht (errechnet) / *Calc WT*: 29,581 g	Zul. Abw./ *Tolerances*:	Maßstab / *Scale*: 2:1	A3
Prüfmaß / *Testdimension*	ISO 2768-c	DIN / ISO 13715	CUSTOMER DRAWING
Teileindex / *Partindexnumber:*			
Bagatelle change: 22.02.2021 MCARLE			

Index	Änderung/ *Description*	Datum/ *Date*	Name
01	202000083	05.02.2021	MCARL

Gez.	05.02.2021
Drawn	MCARLE
Status	Released
Gepr.	10.02.2021
Checked	MBERTSCH

Amphenol Tuchel Industrial GmbH

Male cable connector
for cable diameter 4-6mm

M HA T 3XXX 001+010+018 U

Blatt/ *Sheet* 1 / 1 Bl.

Ers. f. / *Replacement for*:

FA12021-000622 | NXM-V01

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

D38999/20FE35SN DBM25P032N 122116-15 65239-013LF FCE17-B25PM-280 M83723/96W1624N D38999/24ZJ4PA D38999/26ME35PN 163X10049X AT60-16-0144 MB5RJN0601 MS27467T23B53A 10124149-102LF AT60-14-0144 L17D53018 PT06J-12-3S RL0-100-1-70RE SLPHPC70BSO2 D25S24B4GV00LF 115101-20-M1.00 97-3101A14S-6P 97-3106A-22-9P(946) 97-3106A-28-8S(936) T 3277 000 T 3437 000 135101-02-12.00 T821106A1R100CEU CL90555DT52413S NPC-1220-030A1S RT001619PNH-K