




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

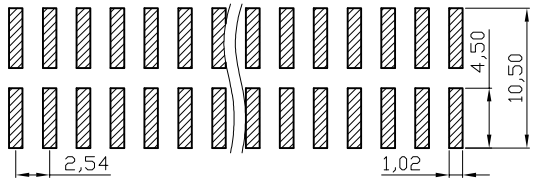

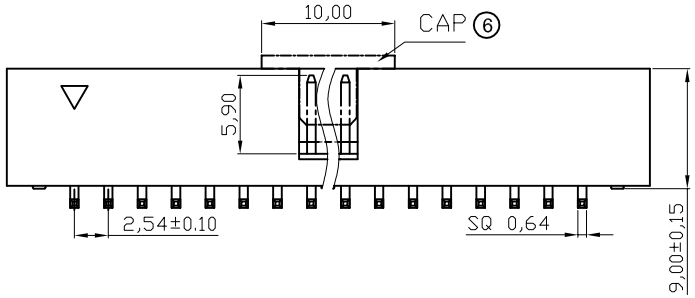

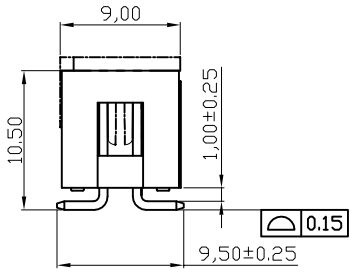

NOTES:

MATERIAL
⑨ 1.Insulator Material:PA9T+30%GF(UL94V-0),Black
2.Contact Material : Brass
3.Contact Plating : Gold flash
ELECTRICAL
1.Current Rating : 3.0AMP
2.Withstand Voltage : 1000V AC/minute
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing: Tube+Cap
⑤ 3. Soldering temperature: +260°C(10s)

Order Information

Contacts xx: 06,08,10,12,14,16,18,20,24
26,30,34,50,60,64

RoHS compliant

⑦ File No.: E198287

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Id.	Modification	Date	Name
⑨	Correct the material to PA9T	22.03.2016	Winnie
⑧	Update the correct part number	11.02.2014	Amy
⑦	Add UL-File No	12.12.2013	Winnie
⑥	Modification the cap	07.11.2012	Amy
⑤	add soldering temperature	09.12.2011	Lucas
④	Corrected insulator material	29.10.2009	Dean

	Date	Name
Drawn	25.01.2006	Alex
Approved	22.03.2016	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
⑧ AWHW xxG-SMD

Drawing-No.
ASS 2316 CO

rev09

Replace

Sheet

SV1129

Downloaded from Arrow.com.