

213347
OGWSD-25G3-T3
Frame light barrier

- IO-Link
- Frame structure
- Robust metal housing
- Baffle protection at the optics
- Cross bar, removable
- High resolution
- Short response time
- Potentiometer for adjustment
- Operating principle: dynamic or static
- 4 operating modes as an IO-Link parameter



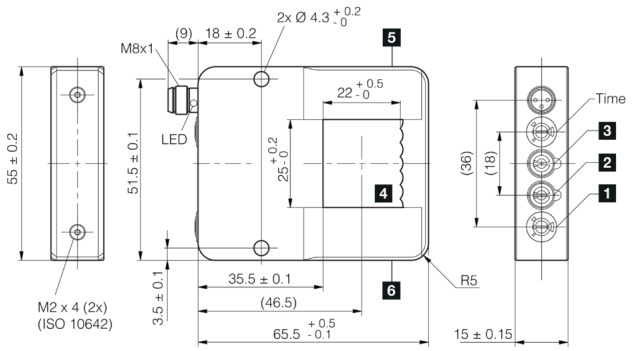

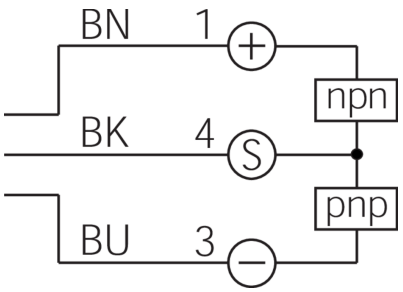

1) sensitivity
2) NO/ NC
3) static/dynamic
4) Sensing zone
5) Transmitter
6) Receiver

BK: black BN: brown BU: blue

Function

IO-Link

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 … 30 V DC
No-load current (max.)	40 mA
Inverse polarity protection	Yes
Short-circuit protection	Yes
Housing material	Aluminum (Black, Anodized)
Material	Plastic (Window)
Weight	86 g
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	Switching, Dynamic/static switchable
Operating modes	Static, Dynamic, Shadowing
Switching output	Push-pull, 100 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Interface	■ IO-Link V1.1.3, COM2 (Smart Sensor Profile) ■ 2nd Edition V1.1 SSP 4.1.1
Pulse stretching	0 … 150 ms adjustable
Light source	LED
Color	Infrared
Detection range	25 x 22 mm
Resolution	Ø 1.0 mm (static), Ø 0.7 mm (dynamic)
Sensitivity adjustment	Potentiometer
Display	LED yellow - Switching output

213347
OGWSD-25G3-T3
Frame light barrier

Technical data (typ.)	+20°C, 24 V DC
Response time	0.05 ms
Release time	0.05 … 10000 ms
Ambient temperature during operation	-10 … +60 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK …

More information / accessories	https://www.di-soric.com/213347

© di-soric . Right to change reserved

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DI-SORIC:

212920 213113 SBT-RGB-R50-4S-B5 202665 209917 210385 213757 213813 210243 210249 210891 212879 202707 212857 213805 213806 209916 212824 213036 213114 201144 210992 212881 210245 SBT-RGB-R50-4B-B5 210197 210627 210910 212817 212882