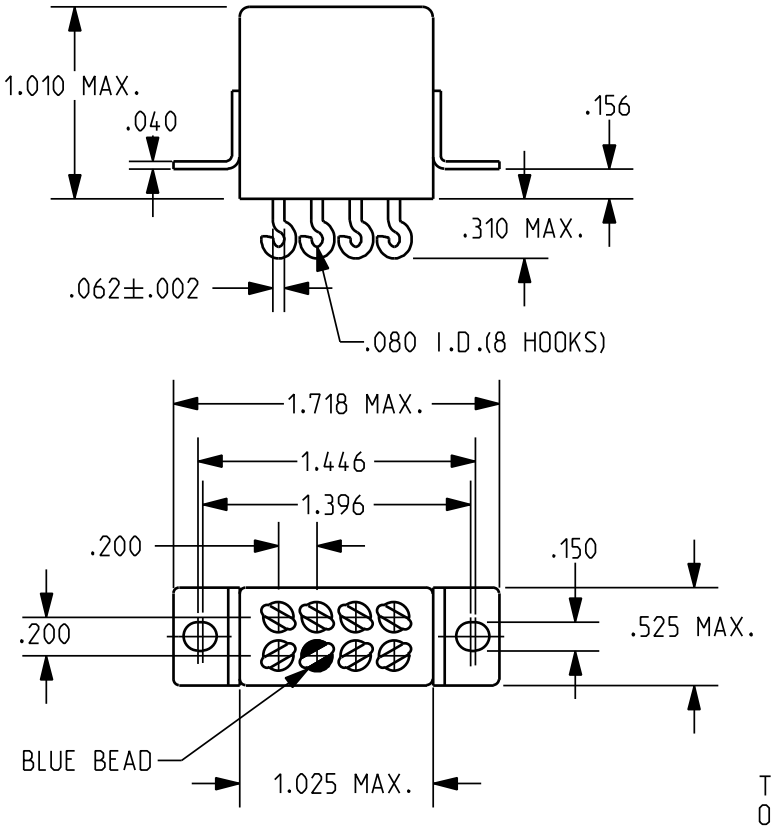


REV. A
DCO 300781

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE	320 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION

TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 10 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

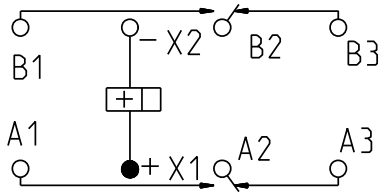

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. B.D. 06MAR2008 | CK. 3/7/08 J.M.B.

Tyco Electronics

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST.
CUST. NO. M83536/9-023L REV. ---

TE NUMBER
9-1617748-7

CII PART NUMBER
FCA-210-0923L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

FCA-210-0923L