SPECIFICATION SHEET

Web site: www.marinco.com
Phone: 800-307-6702
Date: December, 2013 Rev: 02

Inlet, pin & sleeve
Reverse service
100A, 125/250V
3-Pole, 4-Wire


Catalog Number: M4100B12R

Item:	Watertight male inlet, pin & sleeve
Rating:	100 amperes, 125/250 volts, single-phase, 3-pole, 4-wire
Materials:	Housing and flange are nylon/ABS blend; pin carrier is nylon.
Terminals:	Pillar type, with dual, nickel-plated brass terminal screws
Pins:	Solid brass, nickel plated. Accommodates 1/0 – 3 AWG.
Overall Design:	Watertight rating IP 67 per IEC 60529 Stainless steel assembly screws
Certifications:	Underwriters Laboratories, Inc. listed, for the US and Canada (cULus), file E106703 Complies with ABYC and US Coast Guard standards
Configuration	IEC 60309-2, grounding pin at 12 o'clock position



front view of inlet

Dimensions:

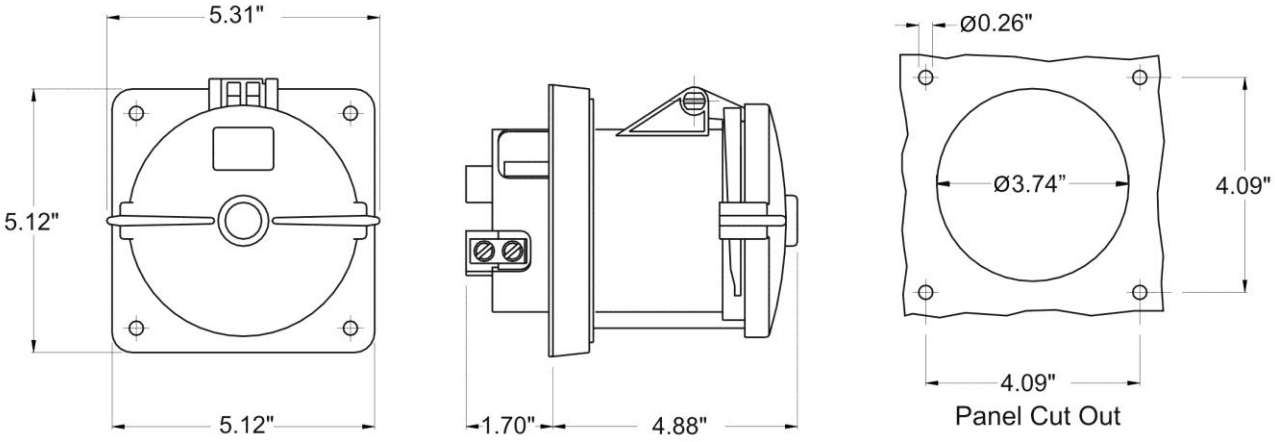

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

MARINCO:

185070F-01-1 306P-MT1 6365CRN CLS2MB-B 12VRCO 3015C CLS40MB-B CLS40MB-G CS8364N
184100F-01-1 3015R-AM1 6369CR 12VBR.OEM 6364CRN CLM2M-A 3021R 5278DRI-TM.OEM
CLS40MB-A CLS40MB-C MRL156D 150025 184060F-01-1 2015P 28210 CL40FRSB-C CLS40FB-C
CS8375 4770 CLS20MB-A N28810