DO NOT SCALE PRINT

Honeywell

BASIC SWITCH


SLOW ACTION - 2 NORMALLY CLOSED

CATALOGUE LISTING

GLZ306


NOTES:-


1. MOUNTING HOLE WILL ACCEPT M3 MAX. SCREW.
2. TERMINALS WILL ACCEPT ___ STRANDED WIRE 18 TO 14 AWG.
   CONDUCTORS OF SOLID WIRE 18 TO 16 AWG.
3. SWITCHES ARE APPROVED TO EN60947-5-1
4. THERMOPLASTIC CASE , COVER AND PLUNGER.

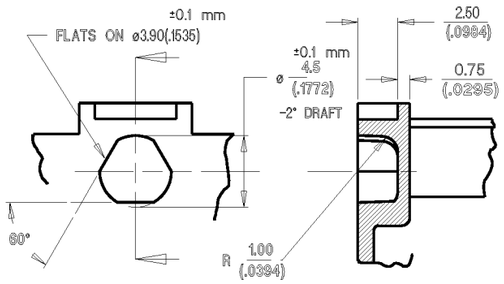



DETAIL 'A'

SCALE-4:1

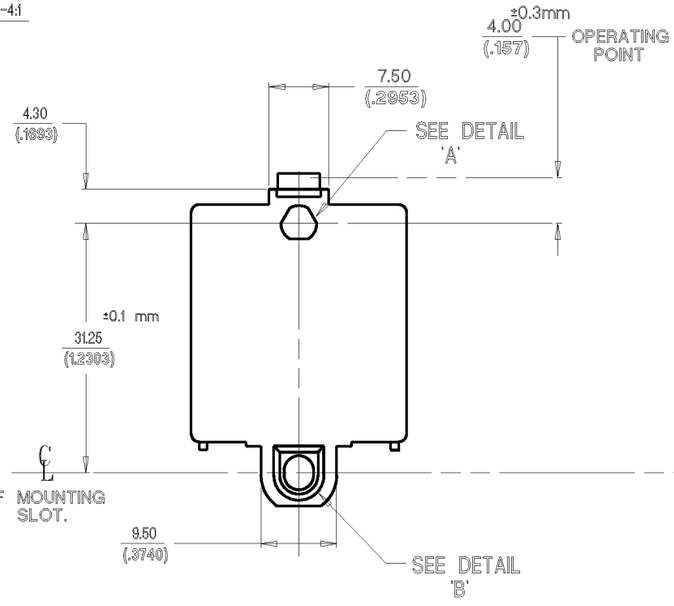

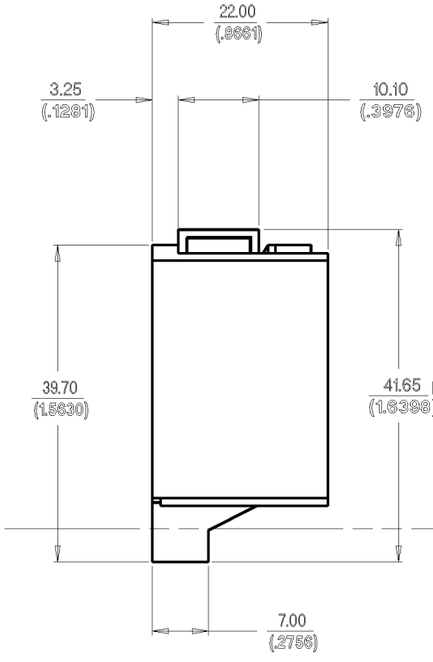

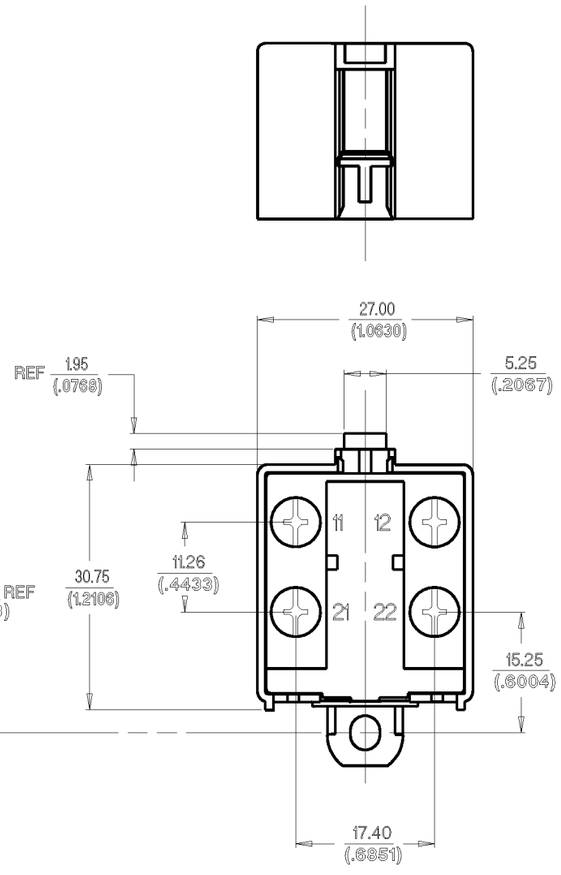

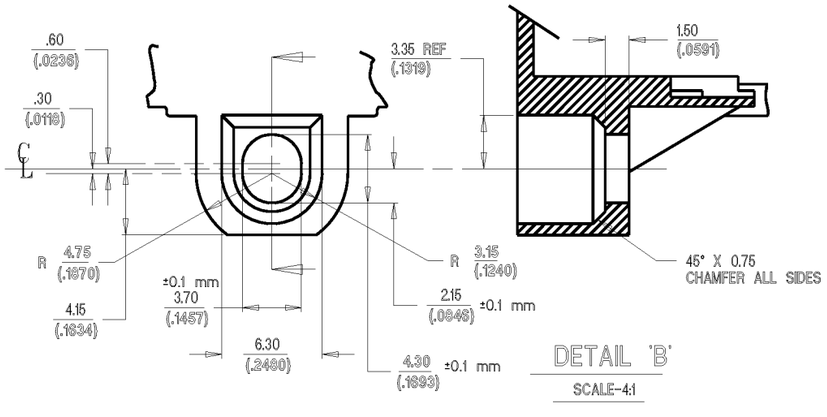

DETAIL 'B'


SCALE-4:1

CHARACTERISTICS	
FORCE TO BREAK	4.5N ±2N
SIMULTANEITY	0.25mm MAX.
PRETRAVEL	2mm ±0.3
OVERTRAVEL	3mm MIN.
FULL OVERTRAVEL FORCE	9N .

ELECTRICAL DATA	
CONTACT ARRANGEMENT	BREAK DISTANCE
2Y	3.5 mm

ELECTRICAL RATINGS
(DEPENDANT ON ENCLOSURE)

AC15 A500
DC13 Q300
Ith 10A



TOLERANCES UNLESS OTHERWISE STATED ±0.25
ANGULAR ±
MODIFY ON CAD3D SYSTEM ONLY

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD. THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE PROJECTION

SCALE:- 2:1

DIMENSIONS ARE IN MM/INCHES

DRAWN	J. O'DONNELL	08/97	
CHECK			
DESIGN			
AUTHOR'N			

RELEASE NUMBER 1 | ISSUE | DRAWING NUMBER | DR | REPLACES

M GLZ306

REVISIONS

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Honeywell:

ABP2MDAN004ND2B3XX SSCMRRT100MD7A3 SSCSSND100PA2A3 SSCMNNN030PA2A3 19C010PG2K 26PC05SMT 26PCFFS2G 40PC006G2A AWM5104VN HSCMRND030PD3A3 19C005PG3K 9301201 SSCDRNT1.6BAAA3 163PC01D75 HSCMRNN100PASA3 SSCDLNN001PDAA5 SSCDRRN005PD2A3 SSCMANN006BGAA3 SSCMRRN015PDSA3 364X5K SSCDRNN100PG2A5 SSCDRRN001PD2A5 11TS15-1 LSR1A ABP2LNNT400KA2A3XX HSCMLNN100PASA3 LSZ51B SS41 SDX005IND4 SSCDRRV100MGSA3