



REV.	DATE	DESCRIPTION
NC	03/27/06	INITIAL RELEASE

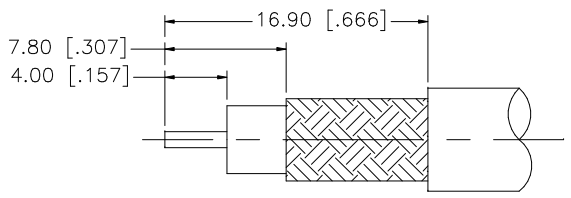

RECOMMENDED
CABLE STRIPPING DIM'S

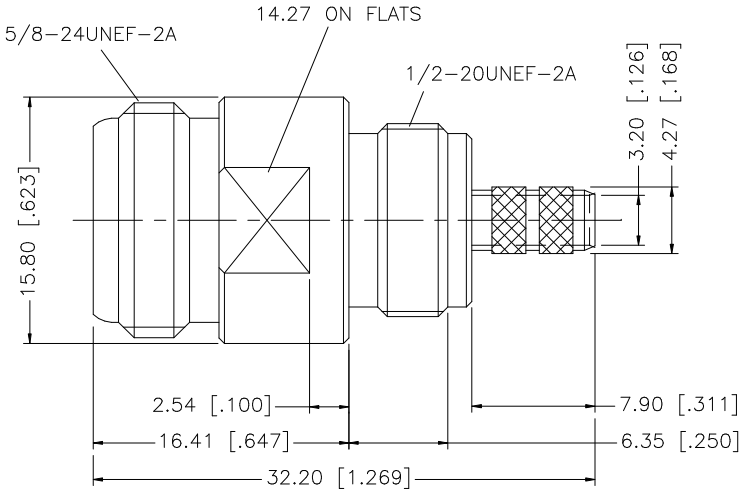

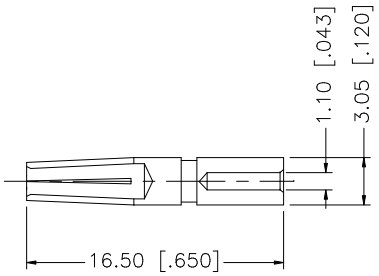



8				
7				
6				
5				
4	FERRULE	BRASS	NEXCOTE	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/27/06
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/172/172328.DWG

Amphenol Connex

PART DESCRIPTION
N SCREW–IN CRIMP JACK
FOR RG–55/U, 142/U, 223/U CABLE

PART NO. 172328

DWG. NO.	REV.	SIZE	SCALE
172328.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 67996-204HLF 70218-1116LF 86093967896755LF DAPO15S365TLF 54202-S08-07LF 65781-158 LD15P33E4GV00LF RJE061661210 68000-236HLF 68001-200HLF 86093968191755E3LF 86130202123355E1LF 68001-108HLF DCMF37P 70234-112LF D15P13A6RV12LF 69192-408HLF 863013A LD25S33E4GV00LF RJSBE5080C2 95157-140LF 76384-316LF 86093488314745V1LF 86093968813H45V1LF 91614-403ALF 68002116HLF 70430-164LF CD15S13E4RV09LF DEM09P032N