



REV.	DATE	ECR NO.	DESCRIPTION
NC	05/13/11	XXXXXX	INITIAL RELEASE

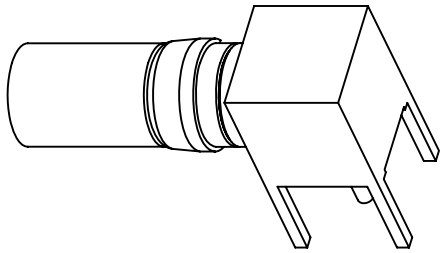

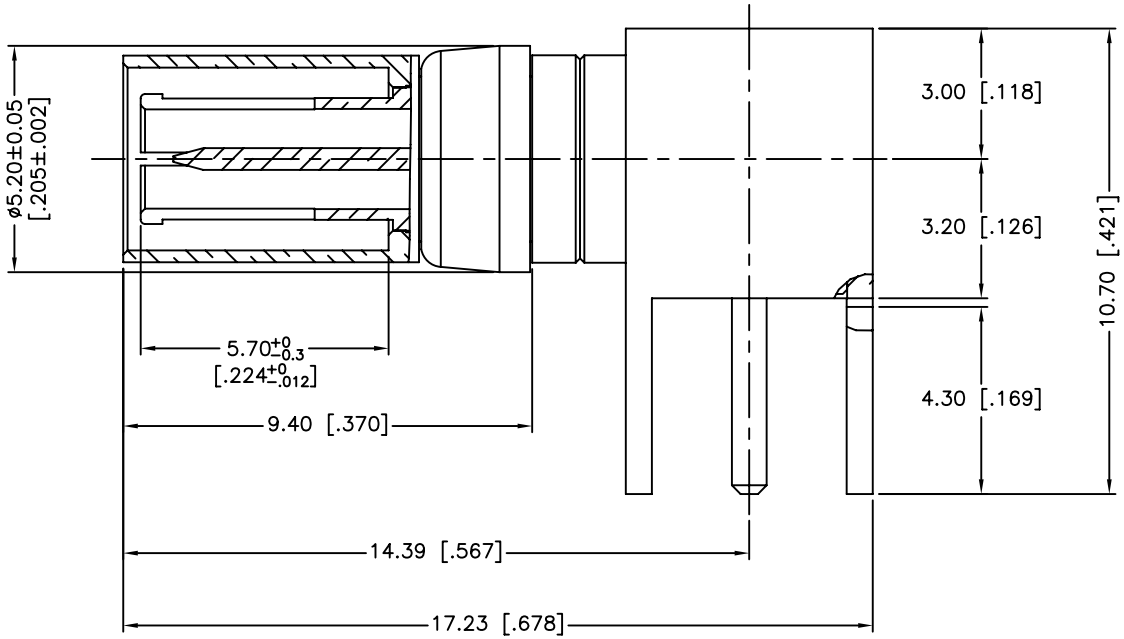

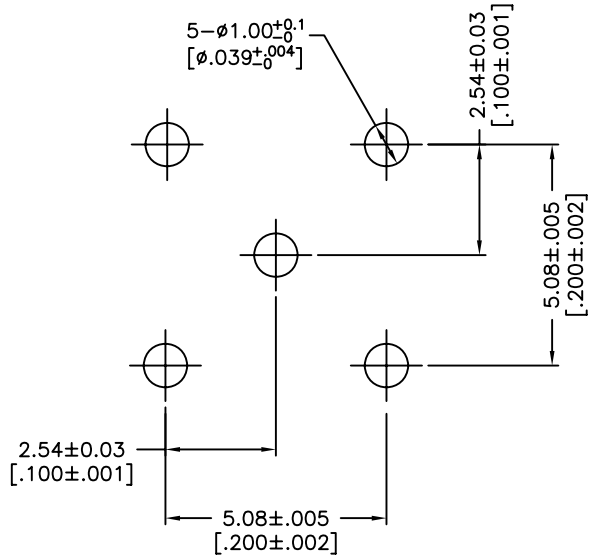

RECOMMENDED
MOUNTING HOLE

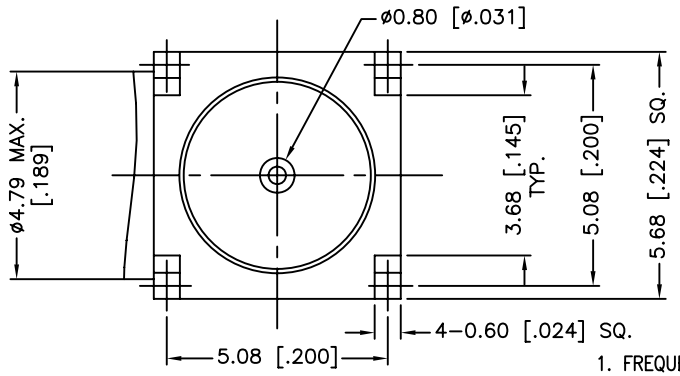

1. FREQUENCY RANGE: DC 0−4 GHz
2. VSWR(RETURN LOSS): 1.10, MAX.

	DESCRIPTION	MATERIAL	FINISH	QTY
6	HOUSING	BRASS	GOLD	1
5	INSULATOR	PTFE	NATURAL	1
4	RETAINER RING	BER. COPPER	BRIGHT TIN	1
3	CONTACT PIN	BRASS	GOLD	1
2	OUT CONTACT	BER. COPPER	GOLD	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 − 8mm ± 0.20mm
8 − 30mm ± 0.40mm
30 − 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 − .315 = ± 0.007"
.315 − 1.180 = ± 0.015"
1.180 − 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	05/13/11
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/282116−75.DWG

Amphenol Connex

PART DESCRIPTION
1.0/2.3 R/A PCB PLUG
(75 ohm)

PART NO. 282116−75

DWG. NO. 282116−75.DWG | REV. NC | SIZE A | SCALE NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

69192-408HLF 86093967896755LF 91614-403ALF 68000-236HLF 68001-200HLF 86130202123355E1LF RJE061661210 76384-316LF 86093968191755E3LF CD15S13E4RV09LF 68001-108HLF DAPO15S365TLF 54202-S08-07LF 67996-204HLF 70234-112LF 70430-164LF 863013A D15P13A6RV12LF RJSBE5080C2 54202-G0805CLF 65781-158 86093488314745V1LF 86093968813H45V1LF DCMF37P LD25S33E4GV00LF 70218-1116LF 95157-140LF DEM09P032N LD15P33E4GV00LF 68002116HLF