
REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE DRAWING FORMAT

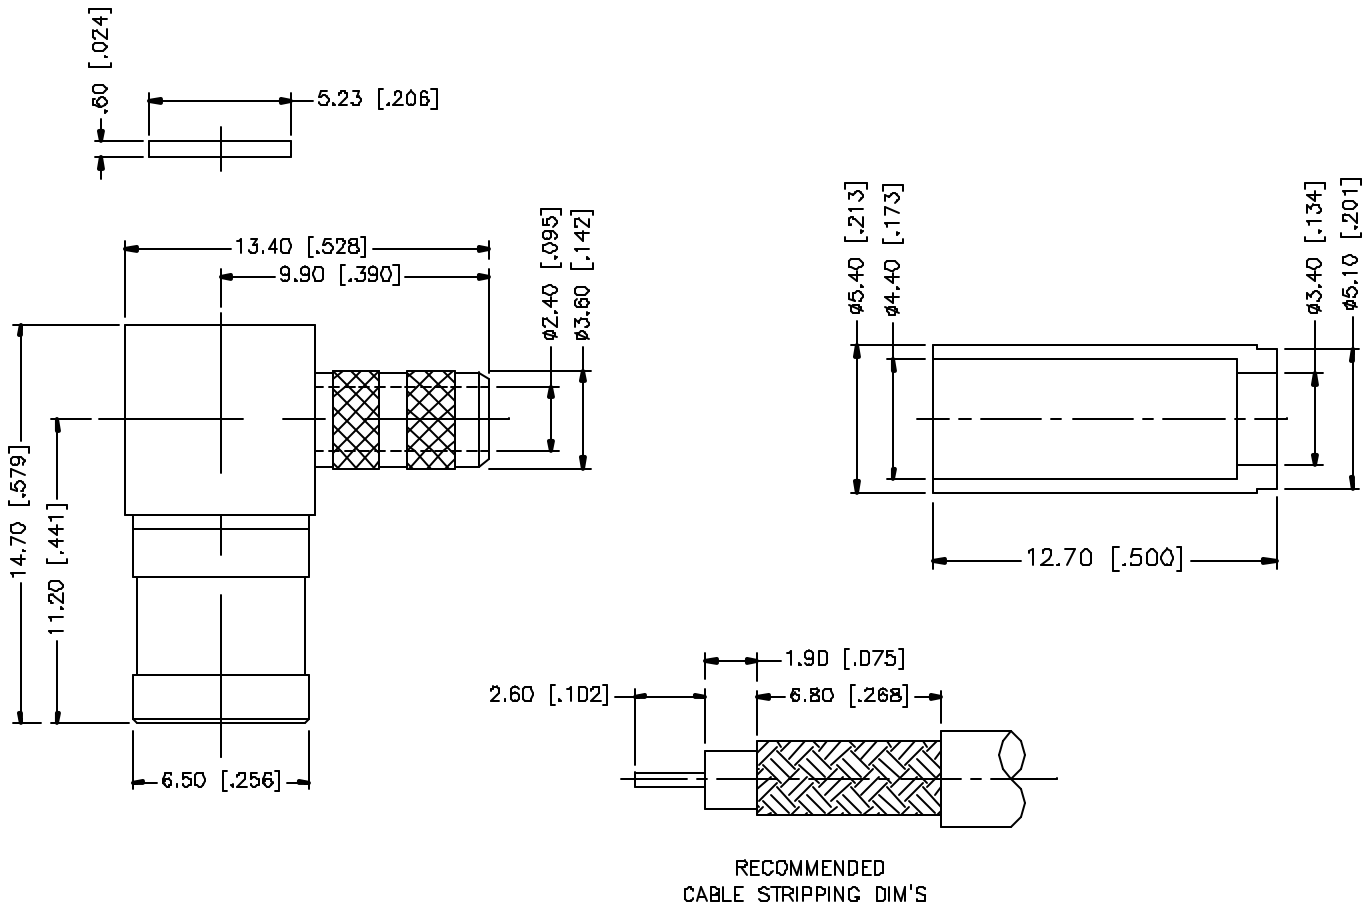

RECOMMENDED
CABLE STRIPPING DIM'S

B				
7				
6				
5				
4	FERRULE	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/27/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142221-75.DWG

Amphenol Connex

PART DESCRIPTION
MINI 75ohm SMB R/A CRIMP PLUG
(FOR AT&T 735A CABLE)

PART NO. 142221-75

DWG. NO.	REV.	SIZE	SCALE
142221-75.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 54202-S08-07LF 65781-158 68002116HLF 86093968191755E3LF 86093968813H45V1LF 91614-403ALF 95157-140LF LD25S33E4GV00LF 68001-200HLF 70218-1116LF DAPO15S365TLF DCMF37P 67996-204HLF 70430-164LF 86093488314745V1LF 70234-112LF DEM09P032N RJE061661210 86093967896755LF 86130202123355E1LF CD15S13E4RV09LF 68000-236HLF 68001-108HLF 863013A D15P13A6RV12LF RJSBE5080C2 69192-408HLF 76384-316LF LD15P33E4GV00LF