



REV.	DATE	DESCRIPTION
NC	12/17/98	INITIAL RELEASE




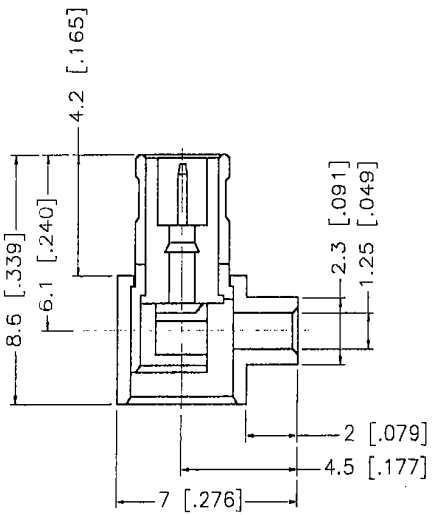

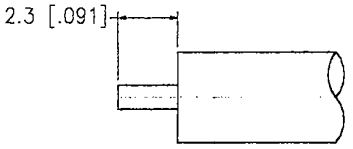

RECOMMENDED
CABLE STRIPPING DIM'S

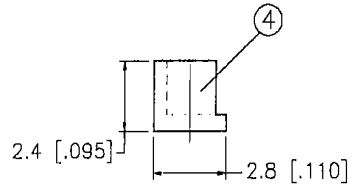



	DESCRIPTION	MATERIAL	FINISH
1	HOUSING	BRASS	GOLD
2	BODY	BER. COPPER	GOLD
3	INSULATOR	TEFLON	NATURAL
4	CONTACT PIN	BRASS	GOLD
5	INSULATOR	DELRIN	NATURAL
6	COVER	BRASS	GOLD
7			
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1
315–1000 = ± 1.6
1000–2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	12/17/98
CHECKED		
ISSUED		

Connector Corporation

TITLE: MCX R/A DIRECT SOLDER PLUG (FOR .047" SEMI RIGID CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	252158.DWG	NC

SCALE	PART NO.	SHEET
NA	252158	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

RJE061661210 LD25S33E4GV00LF 54202-S08-07LF 65781-158 76384-316LF 86093968191755E3LF 86093968813H45V1LF D15P13A6RV12LF 54202-G0805CLF 67996-204HLF 68001-200HLF 70218-1116LF 91614-403ALF DEM09P032N RJSBE5080C2 68001-108HLF 70234-112LF 86093967896755LF CD15S13E4RV09LF 69192-408HLF 863013A DCMF37P LD15P33E4GV00LF 68000-236HLF 68002116HLF 95157-140LF 70430-164LF 86093488314745V1LF 86130202123355E1LF DAPO15S365TLF