



REV.	DATE	ECR NO.	DESCRIPTION
NC	01/05/07	–	INITIAL RELEASE
A	06/07/07	–	REVISE BODY LENGTH AND DIAMETER, REVISE CONTACT PIN
B	01/28/08	–	ADD CABLE STRIPPING DIMENSIONS
C	05/25/08	100019	REVISE BODY AND CONTACT PIN DESIGN
D	07/21/08	–	ADD MID BODY DIA. DIMENSION 7.78 [.307]

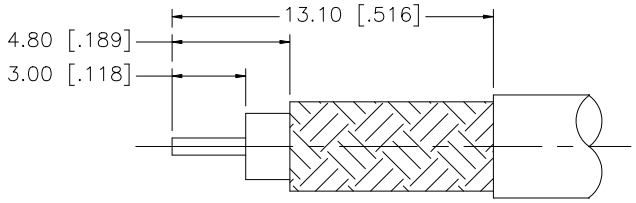

RECOMMENDED CABLE
STRIPPING DIMENSIONS

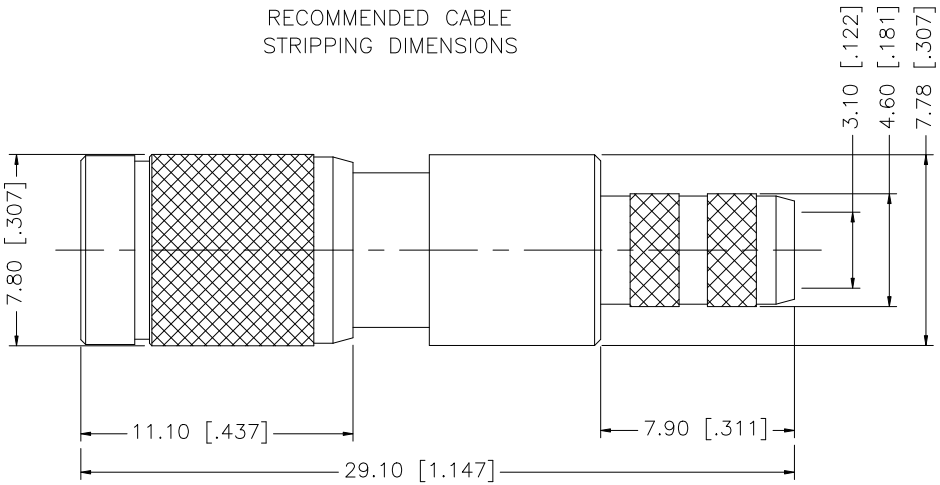

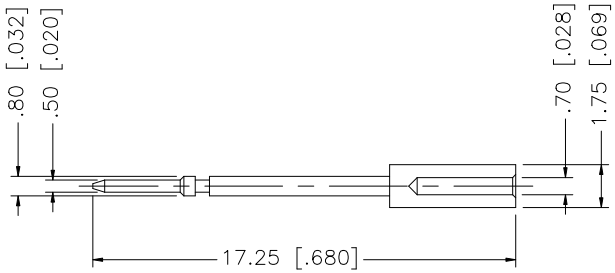

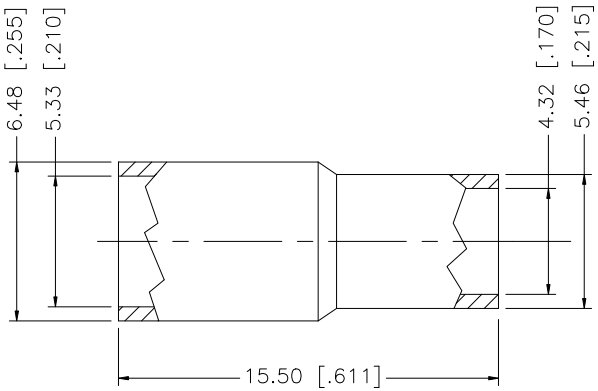

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER.

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/21/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/282/282122-75.DWG

Amphenol Connex

PART DESCRIPTION
1.0/2.3 PUSH-PULL CRIMP PLUG
(FOR BELDEN 1855A CABLE)

PART NO. 282122-75

DWG. NO.	REV.	SIZE	SCALE
282122-75.DWG	D	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

863013A LD25S33E4GV00LF CD15S13E4RV09LF DCMF37P DEM09P032N 54202-S08-07LF 68002116HLF 69192-408HLF 76384-316LF 86130202123355E1LF 91614-403ALF 54202-G0805CLF 67996-204HLF 70218-1116LF 70234-112LF 86093967896755LF D15P13A6RV12LF DAPO15S365TLF 65781-158 68001-200HLF 70430-164LF RJSBE5080C2 95157-140LF 68000-236HLF 86093968813H45V1LF RJE061661210 68001-108HLF 86093488314745V1LF LD15P33E4GV00LF 86093968191755E3LF