


REV.	DATE	DESCRIPTION
NC	09/07/99	INITIAL RELEASE
A	07/21/05	UPDATE DRAWING FORMAT

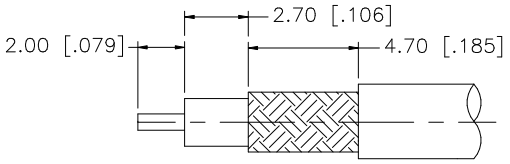


RECOMMENDED
CABLE STRIPPING DIM'S

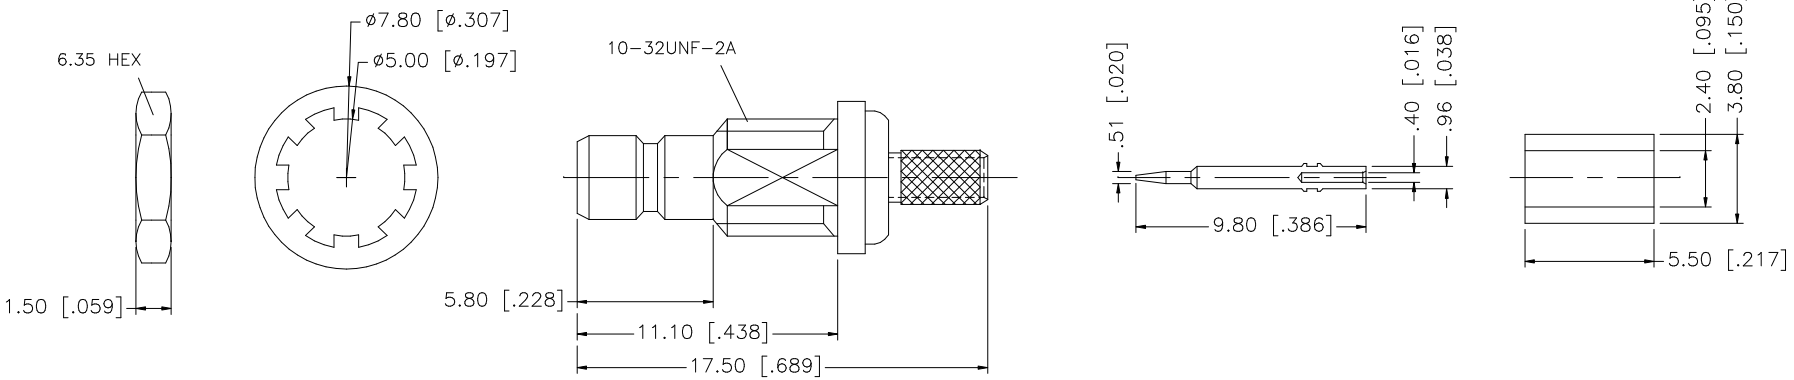



RECOMMENDED
MOUNTING HOLE

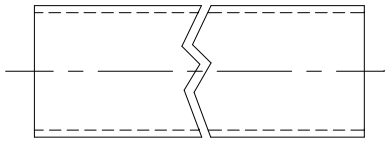

(HEATSHRINK TUBE)

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	HEAT SHRINK TUBE			1
6	FERRULE	COPPER	GOLD	1
5	HEX NUT	BRASS	GOLD	1
4	LOCK WASHER	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/21/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142231.DWG

Amphenol Connex

PART DESCRIPTION
SMB BULKHEAD CRIMP JACK
(FOR RG-178B/U, 196A/U CABLE)

PART NO. 142231

DWG. NO.	REV.	SIZE	SCALE
1421231.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

69192-408HLF 70234-112LF 863013A DEM09P032N RJSBE5080C2 65781-158 67996-204HLF 68001-200HLF 91614-403ALF CD15S13E4RV09LF D15P13A6RV12LF LD15P33E4GV00LF 95157-140LF DCMF37P 54202-G0805CLF 68000-236HLF 68001-108HLF 68002116HLF 86093967896755LF DAPO15S365TLF 70218-1116LF 70430-164LF 76384-316LF 86093968813H45V1LF LD25S33E4GV00LF RJE061661210 54202-S08-07LF 86093488314745V1LF 86093968191755E3LF 86130202123355E1LF