


REV.	DATE	DESCRIPTION
A	05/01/04	UPDATE PLATING SPECS.

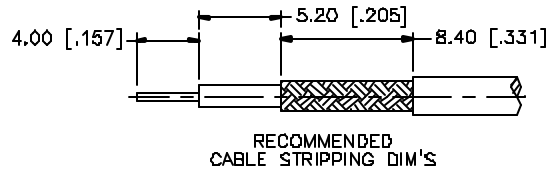

RECOMMENDED
CABLE STRIPPING DIM'S

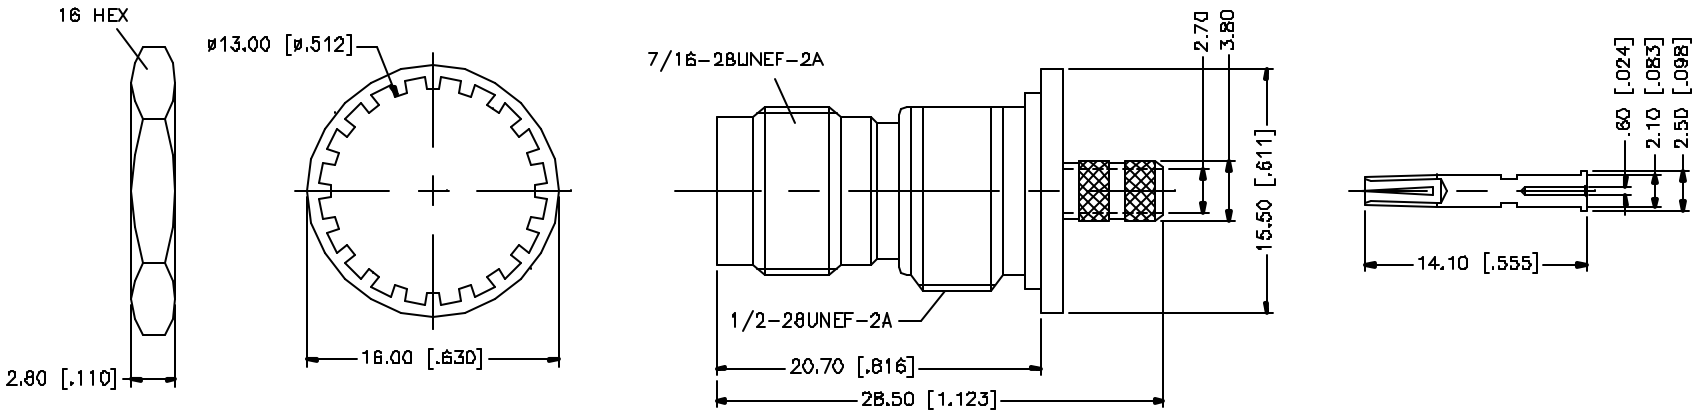

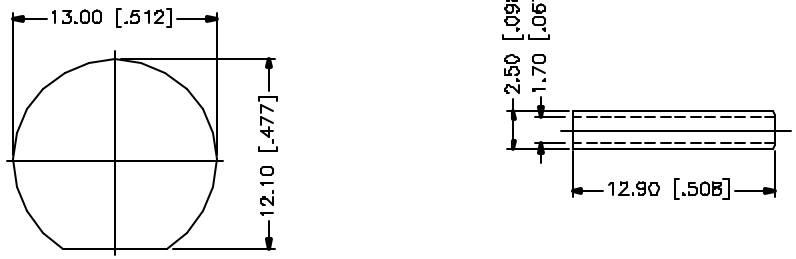

RECOMMENDED
MOUNTING HOLE

NOTES:

1. CRIMPED FERRULE
   HEX CRIMPED SIZE .178"
2. CRIMPED CONTACT PIN
   HEX CRIMP SIZE .068"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	FERRULE	COPPER	NICKEL	1
6	SLEEVE	DELRIN	NATURAL	1
5	HEX NUT	BRASS	NICKEL	1
4	LOCK WASHER	BRASS	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	05/01/04
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/122/122210.DWG	

Amphenol Connex

PART DESCRIPTION
TNC BULKHEAD ISOLATED CRIMP JACK
(FOR-RG174/U, 188A/U, 316/U)

PART NO. 122210

DWG. NO.	REV.	SIZE	SCALE
122210.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

67996-204HLF 69192-408HLF 91614-403ALF 95157-140LF DEM09P032N 65781-158 68002116HLF 70430-164LF D15P13A6RV12LF LD25S33E4GV00LF 86093967896755LF 86093968191755E3LF LD15P33E4GV00LF RJSBE5080C2 68001-200HLF 863013A CD15S13E4RV09LF 86130202123355E1LF 54202-G0805CLF 70218-1116LF 76384-316LF 54202-S08-07LF 68000-236HLF 70234-112LF 86093488314745V1LF DCMF37P RJE061661210 68001-108HLF 86093968813H45V1LF DAPO15S365TLF