



REV.	DATE	DESCRIPTION
NC	04/03/05	INITIAL RELEASE

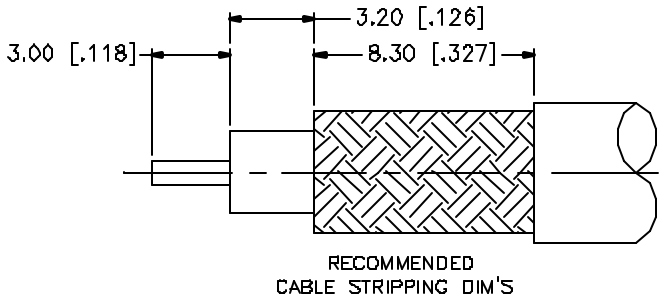

RECOMMENDED
CABLE STRIPPING DIM'S

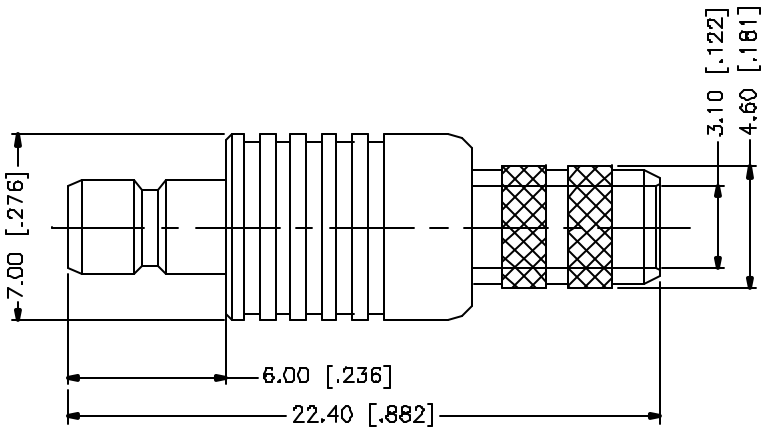

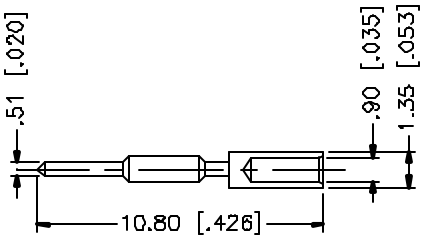

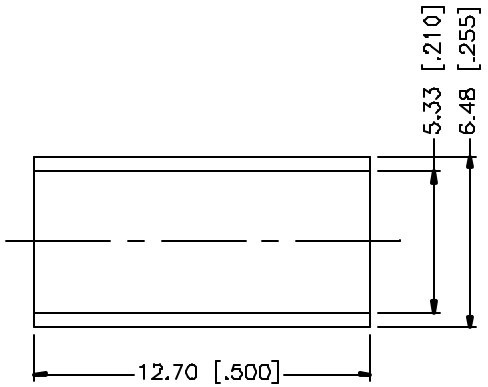

8				
7				
6				
5				
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/03/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142330.DWG

Amphenol Connex

PART DESCRIPTION
SMB CRIMP JACK
(RG-58/U, 58B/U CABLE)

PART NO. 142330

DWG. NO.	REV.	SIZE	SCALE
142330.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70234-112LF DCMF37P LD15P33E4GV00LF RJSBE5080C2 68002116HLF 69192-408HLF 863013A
76384-316LF 86130202123355E1LF CD15S13E4RV09LF 54202-G0805CLF 68001-200HLF 70218-1116LF
91614-403ALF 54202-S08-07LF 67996-204HLF 86093968191755E3LF LD25S33E4GV00LF RJE061661210
65781-158 68000-236HLF 70430-164LF 86093968813H45V1LF DAPO15S365TLF 68001-108HLF
86093488314745V1LF 86093967896755LF 95157-140LF D15P13A6RV12LF DEM09P032N